
SP6000 PLUNGE CUT SYSTEM

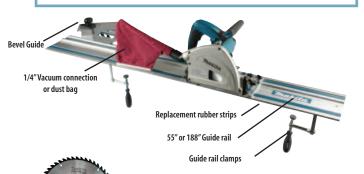

A Company of the Comp						
6-1/2" Circular Saw Blades for SP6000						
Part No	Diameter	Teeth	Hook	Kerf	Material	Max RPM
B-07440	6-1/2"	56 CT	-3	0.096"	Aluminum	9250
B-07353	6-1/2"	48 CT	8	0.088"	Wood	9250
B-07434	6-1/2"	28 CT	15	0.088"	Wood	9250

6-1/2" Plunge Cut Circular Saw

SP6000 SP6000X1

SP6000X2

Unique plunge action for specialized cuts · Depth stopper for splinter-free cutting

· Tip-resistant design when used with guide rail

 Designed for Easy Blade Replacement • Optional guide rails available for more precise cutting (55" or 118")

STANDARD EQUIPMENT

SP6000 INCLUDES: 6-1/2" C.T.Circular Saw 48T(B-07353), Hex Wrench 5 (783203-8), Guide Rule (165447-6), Vacuum hose adapter (W-18195)

SP6000X1 INCLUDES: Same as SP6000 plus 55" (139.7 cm) Guide rail (194368-5) **SP6000X2 INCLUDES:** Same as SP6000 plus 118"(299.7 cm) Guide rail (194367-7)



Blade diameter 6-1/2" (165 mm) Max. cutting capacity: 2-3/16" (56 mm) 45° 1-9/16" (40 mm) 48° 1-7/16" (37 mm) AMPS (120 V) 12.0 Overall length 13-3/8" (341 mm) Net weight 9.1 lbs. (4.1 kg) Shipping weight: SP6000 12.8 lbs. (5.8 kg)

SP6000X1 19.8 lbs. (8.9 kg) SP6000X2 55.0 lbs. (24.9 kg)

SP6000 Guide Rails

OPTIONAL

ACCES

RIES FOR SP60

55" (139.7 cm) Guide Rail (194368-5) 118" (299.7 cm) Guide Rail (194367-7)

• SP6000 locks onto guide rail for precise cutting



Guide Rails Rubber Seats

• Replacement rubber feet for the bottom of the guide rail (194416-0) SEAT 10000 SET (Vinvl) (194417-8) RUBBER SEAT 10000 SET (194418-6) RUBBER POSITION SEAT 1400 SET (194419-4) RUBBER POSITION SEAT 3000 SET



Vacuum Hose Adapter

Plastic Carrying Case

(W-18195) · Connects SP6000 to any 1-1/4" vacuum hose



Guide Rail Carrying Cases

(1400BAG) • for 55" (139.7 cm) Guide Rail (3000BAG) • for 118" (299.7 cm) Guide Rail





Dust Bag

(122562-9) • Connects to SP6000 for dust collection



Edge Guide Rule

(165447-6)

Bevel Guide

(194433-0) • For quick and accurate bevel cuts

