

When **QUALITY &
SERVICE** Counts
Choose Makita
makita.ca

 **OUTDOOR
POWER EQUIPMENT**

Makita®



2018 OUTDOOR POWER EQUIPMENT CATALOGUE

POWER CUTTERS	2 - 3
ANGLE CUTTERS	4
POWER-ASSISTED WHEELBARROWS	5
CHAINSAWS	6 - 9
BRUSH CUTTERS	10
LINE TRIMMERS	11 - 12
LAWN MOWERS	13
BLOWERS	13 - 15
HEDGE TRIMMERS	16 - 17

POLE HEDGE TRIMMERS	18 - 19
POLE CHAINSAW	20
CULTIVATOR	20
GRASS SHEARS	21
RECIPROCATING SAWS	22
LOG HOME BUILDING TOOLS	23 - 25
GENERATORS	26 - 28
TRASH & WATER PUMPS	29
ACCESSORIES	30 - 37

WELCOME TO MAKITA'S LINE OF OUTDOOR POWER EQUIPMENT FEATURING SEVERAL POWER OPTIONS

CORDLESS POWER

Dual-Port Rapid Charging System
DC18RD

INDUSTRY LEADING
Rapid Charge Time
6.0Ah

55 minutes

6.0Ah BL1860B
with Charge Level Indicator 197424-0

5.0Ah BL1850B
with Charge Level Indicator 196675-2

4.0Ah BL1840B
with Charge Level Indicator 196401-9

3.0Ah BL1830B
with Charge Level Indicator 194205-3

Compact BL1815N
196235-0

Rapid Charging System DC18RC

BRUSHLESS
TURBO BLOWER
DUB3622

18V LITHIUM-ION

LONGER LIFE

- **Maintenance free operation** with no brushes to replace
- **Reduced friction** means less wear on gears and other internal parts for maximum operational performance
- **Longer battery run times** and overall life cycles

LESS HEAT

- **Lower amperage draw** of brushless motors and minimal friction result in reduced heat buildup in tool and battery
- **Increased Motor Cooling** due to greater air volume around the motor
- Ideal for use during periods of prolonged operation, including manufacturing and production applications

MORE RUN TIME

- Lower heat, friction and amperage draw extends battery run time per charge

MORE WORK

- Brushless Motors offer increased speed, higher torque and maximum operational efficiency for greater productivity
- Electronic controllers allow for integration of **Impact Power Selection** and **Tek Screw Mode** features for precision fastening applications

XPT
EXTREME PROTECTION TECHNOLOGY

XPT tools are designed to **prevent penetration of dust, debris, and liquids into the tool** during standard applications in outdoor or harsh environments

DIRECT CONNECT SYSTEM
Tools with this symbol

use ANY two 18V Li-Ion Batteries
directly without a battery converter

X2
18V + 18V = 36V



ELECTRIC POWER

Makita offers many outdoor power tools with electric motors.

Electric motors are an environmentally friendly alternative to fuel

based engines. Electric motor driven equipment can be stored in the off-season with little to no preparation.

Many of Makita's electric outdoor tools offer a soft start feature and current limiters to protect the motor from premature burnout, extending the life of your equipment.



4-STROKE POWER

MM4
MAKITA MINI 4-STROKE ENGINE


Compared with conventional 4-stroke engines, Makita's

4-stroke engines produce approximately 20 to 30 % more power thanks to its high combustion efficiency and compact spark plug.

Additionally, by employing a unique lubrication system, it has obtained the smallest in class exterior physical dimensions among the 4-stroke engines available in the market today. And it is also lightest in class by using a magnesium alloy diecast for the clutch case.

Patented unique lubrication

system enables use in multiple positions



The patented oil lubrication system expands the use of the MM4 engines into product lines such as brush cutters and line trimmers where traditional 4-Stroke engines have difficulty operating on slopes and angles.

The natural pressure changes in the crankcase caused by the piston movement in the cylinder are harnessed to pump oil throughout the engine. Oil is pumped from a reservoir in the base of the engine through a network of one-way valves for reliable lubrication and long service life without the need to keep the engine level.

New compact plug

Valve system

High-silicone aluminum alloy piston

Double element with filter and sponge

Oil separator

Needle bearing on both ends of connecting rod

Check ball

Hard chrome plating on cylinder

Sintered cam gear

Decompression system:

The force required to pull the starter rope is drastically reduced by the **mechanical decompression system** that features our original centrifugal structure in the cam gear.

All Makita MM4 engines feature:

- Automatic decompression valve to reduce required start up force by 40% for easy starting
- No fuel / oil mixing for cleaner exhaust emissions and reduced fuel consumption
- Primer bulb and choke for easy starting
- Compliant with CARB tier 3, EPA phase 2, EU stage 2 emissions requirements which exceeds government clean air emission ratings
- Low noise levels for quiet operation
- Easy access to spark plug and air filter for fast service
- Lightweight design for operational comfort
- Diaphragm type carburetor for all position operation
- Electronic ignition system for reliable performance

2-STROKE POWER



- All Makita 2-stroke engines are compliant with CARB tier 3, EPA phase 2 and EU stage 2 government regulations.
- Select Makita 2-stroke engines feature a catalytic converter for cleaner emissions. Some models also include a Scavenging Losses Rejection (SLR) muffler system which recycles unburnt gas through the exhaust increasing operational efficiency and producing much cleaner emissions.
- Many of Makita's 2-stroke engines offer a decompression button for easy starting.
- All Makita 2-stroke engines require the use of synthetic engine oil with fuel stabilizer for long engine life.



POWER CUTTERS

4-STROKE POWER

MM4

MAKITA MINI 4-STROKE ENGINE

2
YEAR
WARRANTY

20 mm Arbor



14" cutting wheel

75.6cc Power Cutter

EK7651H

Shown with Optional Blade (T-02836)

**The FIRST 4-Stroke
Power Cutter available
on the market!**

**Automatic
decompression
reduces required
start up force by**

40%

MM4 Premium
4-Stroke Engine Oil
(Part No. T-02484)



ACCESSORIES



**14" Vacuum Brazed
Diamond Rescue Wheel**

See page 31 for more details



Guide Trolley



**10L (2.5 Gal)
Pressurized
Water Tank**

EK7651H

POWER CUTTER FEATURES & BENEFITS

- **Reduced Noise and Fuel Consumption** versus competitive 2-stroke models for maximum operator comfort and reduced operational costs
- **No Fuel Mixing** prevents damage due to improper fuel mixture and eliminates need to carry separate mixed fuel
- **Cleaner 4-Stroke Emissions** limits environmental impact and reduced carbon buildup in engine

SPECIFICATIONS	EK7651H
Displacement	4.6 cu.in (75.6 cc)
Maximum Power	3.0 kW (4.1 hp)
Ignition System	Non-Contact, Magnet Type
Fuel Tank Capacity	1/3 Gal (1.1 L)
No Load Speed	9,100 RPM
Maximum Spindle Speed	4,300 RPM
Maximum Cutting Depth	4-13/16" (12.2 cm)
Dry Weight	28.4 lbs (12.9 kg)

2-STROKE POWER



- **NEW Scavenging Losses Rejection (SLR) muffler** recycles exhaust unburnt gas emissions for increased operational efficiency and cleaner emissions
- **Top mount decompression valve** reduces required start up force by **70%**

- Stratified scavenging system to comply with many exhaust emission regulations
- Rapid start pull force required to start the machine is drastically reduced with spring-assisted recoil starter

- **Advanced 5 stage air filtration system** for cleaner operation and enhanced engine life

SPECIFICATIONS	EK8100	EK7301	EK6101
Displacement	4.9 cu.in (81 cc)	4.5 cu.in (73 cc)	3.7 cu.in (60.7 cc)
Maximum Power	4.2 kW (5.6 hp)	3.8 kW (5.1 hp)	3.2 kW (4.4 hp)
Fuel / Oil Mixture	50:1 Synthetic		
Ignition System	Electronic		
Fuel Tank Capacity	1/3 Gal (1.1 L)		1/6 Gal (0.7 L)
No Load Speed (Engine)	9,350 RPM	9,400 RPM	9,850 RPM
Maximum Spindle Speed	3,820 RPM	4,300 RPM	4,400 RPM
Maximum Cutting Depth	5-3/4" (14.7 cm)	4-13/16" (12.2 cm)	5-1/8" (13 cm)
Dry Weight	23.4 lbs (10.6 kg)	22.5 lbs (10.2 kg)	19.6 lbs (8.9 kg)

DIAMOND BLADES Premium Professional Performance



14" 3D PREMIUM Diamond Blade

Features 3D Diamond Grid Technology incorporating even placement of diamond content throughout the segment



14" Metal Cutting Diamond Blade

Ideal for cutting angle iron, rebar, deck plating, steel studs, pipe and more!

See page 30 for more details

PREMIUM MM4 4-STROKE ENGINE OIL

0.2 L (200 ml) size ideal for use with MM4 Power Cutters and Backpack Blowers
(T-02484) (single bottle)

*For distributor: (T-02490) (12 Bottles / Case)

0.08 L (80 ml) size ideal for use with MM4 Line Trimmers, Brush Cutters, Pole Chain Saw, Hand Held Blowers and 1" Water Pump
(195826-4) (single bottle)

*For distributor: (195826-4-48) (48 Bottles / Case)



All 2-stroke Makita power cutters require synthetic 2-cycle engine oil with fuel stabilizer

For 3.8 L / 1 Gallon Mix

(T-00745C) HP synthetic 2-Stroke oil

*For distributor:

(T-00745C-48) (48 Bottles / Case)

For 9.5 L / 2.5 Gallon Mix

(T-00739C) HP synthetic 2-Stroke oil

*For distributor:

(T-00739C-48) (48 Bottles / Case)



ELECTRIC POWER

SUPER JOINT SYSTEM™
SJS

"SJS" technology prevents kickback
if blade jams protecting both the
operator and tool

Angle Cutters

Used To Cut Steel, Concrete And
Masonry Materials With A Dry Cutting
Diamond Blade

12" Blade Diameter

4112H

4114

14" Blade Diameter

DIAMOND BLADES

Premium Professional Performance



**14" OPTIMUM™
DIAMOND BLADE**
Turbo Rim

- Granite, Ceramic & Stone
- 5,400 RPM
- Material Type: Hard
- For 14" Angle Cutter 4114



**12" OPTIMUM™
DIAMOND BLADE**
Segmented Rim

- Concrete & Asphalt
- 6,300 RPM
- Material Type: Medium & Soft
- For 12" Angle Cutter 4112H

See page 30 for more details

4114 / 4112H

ANGLE CUTTER FEATURES & BENEFITS

- **Guide Wheels** on the tool guard ensure smooth tool travel over surface material
- **Rubber Shield** protects the operators hand and motor from debris
- **Lock-on Button** for continuous operation
- **Ball Bearing Construction** for longer tool life
- **Integrated Nozzle** can be connected to vacuum system for clean operation

SPECIFICATIONS	4114	4112H
Blade Diameter	14" (35.5 cm)	12" (30.5 cm)
Arbor	1" (2.5 cm)	
Maximum Cutting Depth	5" (12.5 cm)	3-15/16" (10 cm)
No Load Speed	3,800 RPM	5,000 RPM
AMPS (120V)	15.0 A	
Overall Length	26-1/2" (67.3 cm)	25-1/2" (64.8 cm)
Net Weight	22.7 lbs (10.3 kg)	25.1 lbs (11.4 kg)

CORDLESS POWER

18V x2 POWER-ASSISTED WHEELBARROWS

Battery Box Holds Two Selectable 18V Batteries
Operates using (1) 18V Battery at a time



Wheelbarrow with **FLATBED TRAY**
Removable Sides / DCU180ZX1



Wheelbarrow with **BUCKET**
Dumping Feature / DCU180ZX2



Brake Lever with Locking Mechanism
prevents accidental start on a slope (Front Wheel)



Variable 2-Speed, Reversible

Maximum Climbing Capacity

12°

Becomes a traditional wheelbarrow when rear wheels are replaced with legs!

Detachable Rear Wheels!

XPT
EXTENDED POWER TOOL TECHNOLOGY

Batteries & Charger Sold Separately

Maximum Loading Capacity

287 Lbs

Move heavy loads with NO BACK PAIN



Switch Trigger



Power-Assisted Wheelbarrows are a convenient solution for transporting material on job sites

- Delivers up to 60 minutes of run time under load using one 18V LXT (6.0 Ah) BL1860 battery
- Holds (2) 18V LXT Lithium-Ion batteries but operates using (1) 18V battery at a time; utilizes second battery when needed
- 2-speed with maximum speed up to 2.5 MPH on a 12° incline
- Maximum load capacity up to 287 lbs (130 kg)
- Rear wheel spacing is adjustable from 19" to 30" to accommodate the work environment

Wheelbarrow with **Flatbed Tray** DCU180ZX1

Tool only. Battery & charger sold separately.



Wheelbarrow with **Bucket** DCU180ZX2

Tool only. Battery & charger sold separately.

SPECIFICATIONS	DCU180ZX1	DCU180ZX2
Battery Capacities	18V Li-Ion	
Maximum Speed Forward, High / Low	0 - 3.5 km/h / 0 - 1.5 km/h	
Maximum Speed Reverse	0 - 1.0 km/h	
Minimum Turning Radius Outer diameter when turning with front wheel as axis	110 cm	
Maximum Climbing Capacity	12°	
Maximum Load Capacity	287 lbs (130 kg)	
Overall Length	61-1/2" (15.6 cm)	51-1/2" (13.1 cm)
Net Weight	97.5 lbs (44.2 kg)	86 lbs (39 kg)

18V x2 LXT power-assisted wheelbarrow Accessories

FLATBED TRAY 199116-7



Side rails install in up or down position; large knob for easy adjustment

BUCKET 198494-2



Heavy duty steel based bucket for tough workloads

CHAINSaws

2-STROKE POWER



72.6cc Chainsaw EA7300PRFE

**SLR + Decompression
Valve + Winter mode**

- Easy Remove Air Filter and Spark Plug Cover for quick maintenance access
- Steel Spring / Advanced Vibration Dampening System is engineered for reducing vibration
- Dual Mount, Aggressive Large Metal Spike Bars for Safety and Hinge Action Cutting

60.7cc Chainsaw EA6100PRGE

**SAS + Easy start
+ Winter mode**

- Heavy Duty Cartridge Filter System designed for Extended Filter Life and Less Maintenance
- Steel Spring / Advanced Vibration Dampening System is engineered for reducing vibration
- Aggressive Large Metal Spike Bar for Safety and Hinge Action Cutting

55.6cc Chainsaw EA5600FREE

**SAS + Easy start
+ Winter mode**

- Heavy Duty Cartridge Filter System designed for Extended Filter Life and Less Maintenance
- Steel Spring / Advanced Vibration Dampening System is engineered for reducing vibration
- Bar & Chain Fasteners remain fixed to cover when loosened


50cc Chainsaw DCS5121REJ

**SLR + Easy start
+ Winter mode**

- Easy Remove Air Filter and Spark Plug Cover for quick maintenance access
- Steel Spring / Advanced Vibration Dampening System is engineered for reducing vibration
- Dual Mount, Aggressive Large Metal Spike Bars for Safety and Hinge Action Cutting

ACCESSORIES

Chainsaw Chain



Chainsaw Bar

Chainsaw Files (12 Pack)



18" Rescue Bar & Chain
(for EA7300PRFE)



Safety Helmet
(Complete)

SPECIFICATIONS	EA7300PRFE	EA6100PRGE	EA5600FREE	DCS5121REJ
Displacement	72.6 cc (4.4 cu.in.)	60.7 cc (3.7 cu.in.)	55.6 cc (3.4 cu.in.)	50 cc (3.1 cu.in.)
Chain Pitch / Gauge	3/8" / .058"			.325" / .058"
Maximum Engine Speed	12,800 RPM	13,800 RPM		
Power Rating	4.0 kW / 5.4 hp	3.4 kW / 4.5 hp	3.0 kW / 3.9 hp	2.5 kW / 3.3 hp
Fuel Tank Capacity	750 ml	800 ml	570 ml	470 ml
Chain Oil Tank Capacity	420 ml	480 ml	320 ml	269 ml
Fuel / Oil Mixture	50:1 Synthetic			
Net Weight Dry Without Bar And Chain	13.8 lbs (6.3 kg)	13.2 lbs (6.0 kg)	12.8 lbs (5.8 kg)	12.1 lbs (5.4 kg)

2-STROKE POWER



All Makita 2-stroke engines require the use of **Synthetic Engine Oil with Fuel Stabilizer** for long engine life



42.4cc Chainsaw
EA4300FREC

Catalytic converter muffler + Easy start + Winter mode

- Easy Remove Air Filter and Spark Plug Cover for quick maintenance access
- Aggressive Large Metal Spike Bar for Safety and Hinge Action Cutting
- Fuel Primer Bulb for Improved and Quicker Cold Starts



35.2cc Chainsaw
EA3601FRDB

SAS + Easy start + Winter mode

- Stratified Air Scavenging engine for lower emissions and improved fuel efficiency
- "Tool-less" chain tensioning for quick and convenient chain adjustment
- Touch & Stop single lever control shuts off engine with just a touch

Intelligent ignition coil controls stable idling, increases output power, protects against engine overrun and enables easier restarting

Easy start / equipped with a spring assisted recoil starter for 30% less pulling force and a low RPM ignition coil providing faster, easier starting



35cc Chainsaw
EA3501SRDB



32cc Chainsaw
EA3201SRDB

- Easy Remove Air Filter and Spark Plug Cover for quick maintenance access
- Steel Spring / Advanced Vibration Dampening System is engineered for reducing vibration transfer to the operator
- Aggressive Large Metal Spike Bar for Safety and Hinge Action Cutting
- Fuel Primer Bulb for Improved and Quicker Cold Starts
- Aggressive Large Metal Spike Bar for Safety and Hinge Action Cutting
- Half Throttle-lock start position with Easy Start for Reduced Start-Up Force
- External Access Holes allow easy Carburetor Adjustment



Chainsaw Chaps

Safety Pants

ACCESSORIES



Chainsaw Files Sets



Chainsaw Case

SPECIFICATIONS	EA4300FREC	EA3601FRDB	EA3501SRDB	EA3201SRDB
Displacement	42.4 cc (2.6 cu.in.)	60.7 cc (3.7 cu.in.)	35 cc (2.1 cu.in.)	32 cc (1.95 cu.in.)
Chain Pitch / Gauge	.325" / .050"		3/8" / .050"	
Maximum Engine Speed	13,500 RPM		13,100 RPM	12,800 RPM
Power Rating	2.1kW / 2.9 hp	1.7 kW / 2.4 hp	1.7 kW / 2.3 hp	1.35 kW / 1.8 hp
Fuel Tank Capacity	480 ml	310 ml	400 ml	
Chain Oil Tank Capacity	280 ml	260 ml	290 ml	280 ml
Fuel / Oil Mixture	50:1 Synthetic			
Net Weight Dry Without Bar And Chain	10.8 lbs (4.9 kg)	9.3 lbs (4.2 kg)	9.9 lbs (4.5 kg)	9.4 lbs (4.2 kg)

New HIGH VISIBILITY SAFETY COLOUR!



CHAINSaws

CORDLESS POWER

BRUSHLESS

X2

18V + 18V → 36V

BRUSHLESS

18Vx2 Chainsaws

Tools only. Battery & charger sold separately.

DUC400Z

16" Bar

Brushless Outer Motor + XPT
+ 3 Year Limited Warranty

XPT
EXTREME PROTECTION TECHNOLOGY



Cordless Chainsaw with specialized battery positioning for optimum balance and control



Unique battery positioning for optimum performance



Brushless outer motor direct drive system

DUC400Z & DUC353Z

18Vx2 CHAINSAW FEATURES & BENEFITS

- **Fast, Variable Speed (3,940 Feet Per Minute)**
Equivalent to a 30 cc Gasoline Chainsaw
- **Specialized 18Vx2 Battery Positioning** is the Makita Industry **GAME CHANGER** within the Cordless Product line offering Premium Balance, Control and Cutting Performance
- **Makita Built Outer Rotor Brushless Motor Direct Drive System** for High Power & Speed equivalent to a 30 cc Gasoline Chainsaw

SPECIFICATIONS	DUC400Z	DUC353Z
Battery Capacities	Two 18V Li-Ion	
Guide Bar Length	16" (40 cm)	14" (35 cm)
Chain Pitch / Gauge	3/8" / 0.043"	
Chain Speed	0-3,940 FPM (1,200 m/min)	
Overall Length	32-1/4" (81.8 cm)	30-1/2" (77.3 cm)
Net Weight	9.3 lbs (4.2 kg)	8.9 lbs (4.0 kg)

CORDLESS POWER

ELECTRIC POWER

18Vx2 handle mount battery position

XPT
EXTREME PROTECTION TECHNOLOGY

X2
18V x 18V = 36V



12" Bar

**XPT / eXtreme
Protection Technology**

18Vx2 Chainsaw DUC302Z

Tool only. Battery & charger sold separately.

- Battery capacity warning light indicates ideal time to recharge battery
- Lock-off button prevents accidental startup
- Inertia chain brake provides maximum operator safety if kickback occurs
- Tool-less chain tension adjustment for quick and easy adjustment on the jobsite
- Automatic chain oiler
- Metal lanyard hook enables quick attachment to lanyard during climbing or bucket operations

18V
LITHIUM-ION



4-1/2" Bar
**18V Compact
design**

18V Chainsaw DUC122Z

Tool only. Battery & charger sold separately.
(Also available with Battery and Charger DUC122SF. See makita.ca)

- Compact design enables maximum operator maneuverability and versatility
- Hand guard protects operators hand during operation
- Lock-off button prevents accidental startup
- Electric brake stops chain within 0.5 seconds for added safety
- Tip guard prevents kickback for maximum operator safety
- Tool-less chain tension adjustment for quick and easy adjustment on the jobsite

16" Bar Chainsaw UC4051A



UC4051A

14" Bar Chainsaw UC3551A

**Soft start
+ Electronic current limiter
+ Electric brake**

- Tool-less chain tension adjustment for quick and easy adjustment on the jobsite
- Soft start feature gradually increases speed to eliminate start up shock
- Electronic current limiter prevents motor burnout due to overloading
- Electric brake for increased operator safety
- Automatic chain oiler maintains constant oil delivery regardless of temperature or oil viscosity
- Increased oil tank capacity enables longer operating time between refills

Cordless Chainsaw Extension Handle (for model DUC122Z) 195595-7



**6-1/2' – 9-1/2'
of added reach!**

Ideal for pruning and limbing in
hard to reach trees

Cordless Chain
Saw not included

ACCESSORIES



SPECIFICATIONS	DUC302Z	DUC122Z
Battery Capacities	Two 18V Li-Ion	18V Li-Ion
Guide Bar Length	12" (30 cm)	4-1/2" (11.5 cm)
Chain Pitch / Gauge	3/8" / 0.043"	1/4" / .050"
Chain Speed	1,650 FPM (500 m/min)	980 FPM (300 m/min)
Overall Length	22-3/4" (57.7 cm)	16-5/8" (42.2 cm)
Net Weight	7.7 lbs (3.5 kg)	4.2 lbs (1.9 kg)

SPECIFICATIONS	UC4051A	UC3551A
Chain Pitch / Gauge	3/8" / .050"	
Chain Speed	2,900 FPM	
Chain Oil Tank Capacity	200 ml	
AMPS (120V)	14.5 A	
Overall Length	19-7/8" (50.5 cm)	
Net Weight	12.3 lbs (5.6 kg)	12.1 lbs (5.5 kg)

BRUSH CUTTERS

See pages 35-37 for more
BRUSH CUTTER ACCESSORIES

4-STROKE POWER



25.4cc Split Shaft Engine Unit

EX2650LH

Patented lubrication system enables Makita 4-Stroke Line Trimmers to be used on any angle and slope

Split Shaft Unit & Attachments Tool Bag
195638-5

18Vx2 Split Shaft Power Unit

DUX60Z

Tool only. Battery & charger sold separately.

BRUSHLESS

SPECIFICATIONS	DUX60Z
Battery Capacities	Two 18V Li-Ion
No Load Speed	0 - 9,700 RPM / 0 - 8,200 RPM 0 - 5,700 RPM
Overall Length	39-3/4" (101 cm)
Net Weight	9.8 lbs (4.4 kg)

- **Patented Lubrication System** enables Makita 4-stroke brush cutters & line trimmers to be used on angles
- Equipped with **Swivel System U-handle** for maximum operator comfort



See page 35 for more Split Shaft Attachment details

SPECIFICATIONS	EBH341U	EBH253U	EX2650LH SPLIT SHAFT
Cutting Width	10" (25.4 cm) With Blade 16" (40.6 cm) With Line Head	9" (22.8 cm)	Varies with attachment
Displacement	33.5 cc	24.5 cc	25.4 cc
Maximum Engine Power	1.07 Kw / 1.44 hp	0.71 Kw / 0.97 hp	N/A
Fuel Tank Capacity	0.65 L	0.5 L	0.6 L
Oil Tank Capacity	0.1 L	0.08 L	0.08 L
Overall Length	71-1/4" (181 cm)	69-3/4" (177 cm)	38-3/8" (97.5 cm)
Dry Weight	15.7 lbs (7.1 kg)	13.0 lbs (5.9 kg)	10.0 lbs (4.6 kg)

4-STROKE POWER

2-STROKE POWER

MM4

MAKITA MINI 4-STROKE ENGINE

- Patented lubrication system enables Makita 4-stroke brush cutters & line trimmers to be used on angles and slopes
- Anti-vibration system for fatigue free use
- Smooth throttle control and soft grip for comfortable operation
- Durable nylon string trimmer head



25.7cc Line Trimmer

EM2600L

- Multi-positional engine
- Environment-friendly 2-stroke engine with catalytic exhaust
- Wide trigger control and soft grip for comfortable operation



Compliant with EPA phase 2, EU stage 2 exhaust emissions regulations

- Multi-positional engine
- Environment-friendly 2-stroke engine with catalytic exhaust
- Equipped with Easy Start system for faster, easier starting

ACCESSORIES



Line Trimmer Guard



Line Trimmer Head



4-Stroke Engine Maintenance Kit

for Line Trimmers & Brush Cutters

197678-9

197437-1

30 Hour
Lubricating
Maintenance Grease

for Line Trimmers & Brush Cutters

SPECIFICATIONS	EBH341L	EBH253L	ER2550LH	EM2600L	ER2600L
Cutting Width	16" (40.6 cm)	16" (40.6 cm)	16-1/4" (41.2 cm)	17" (43 cm)	15-3/4" (40 cm)
Displacement	33.5 cc	24.5 cc		25.7 cc	
Maximum Engine Power	1.07 Kw / 1.44 hp	0.71 Kw / 0.97 hp		0.83 Kw / 1.2 hp	
Fuel Tank Capacity	0.65 L	0.5 L		0.6 L	
Oil Tank Capacity	0.1 L	0.08 L		Fuel / Oil Mixture 50:1	
Overall Length	71-1/4" (181 cm)	69-3/4" (177 cm)	64" (162.3 cm)	69-3/4" (177 cm)	64-3/4" (165 cm)
Dry Weight	14.8 lbs (6.7 kg)	11.5 lbs (5.2 kg)	10.8 lbs (4.9 kg)	10.8 lbs (4.9 kg)	9.5 lbs (4.3 kg)

LINE TRIMMERS

See pages 36-37 for more
LINE TRIMMER ACCESSORIES

CORDLESS POWER

18V Line Trimmer **NEW!** DUR189Z

Tool only. Battery & charger sold separately.

- Telescoping curved shaft adjusts (60-1/2" - 64-1/2" length) for convenient operation in tight places
- Brushless DC Motor for Longer Life / Less Heat / More Run Time & More Work
- Automatic Torque Drive Technology (ADT) Adjusts Motor Speed and Torque during heavy-duty cutting for Maximum Efficiency

11-3/4" Cutting Width

18Vx2 Line Trimmer DUR364LZ

Tool only. Battery & charger sold separately.

13-3/4" Cutting Width

- Powerful trimming for where low noise is a concern
- Brushless motor is located on the trimmer head end to provide ultimate torque for maximum start up



11-3/4" Cutting Width

3 Speed

- Lightweight and Powerful with Low Noise Level
- Automatic Torque Drive Technology (ADT) Adjusts Motor Speed and Torque during heavy-Duty cutting for Maximum Efficiency

18V Line Trimmer DUR187LZ

Tool only. Battery & charger sold separately.

3 Speed

18V LITHIUM-ION

ADT XPT

BRUSHLESS

XPT

BRUSHLESS

18V LITHIUM-ION

ADT XPT

BRUSHLESS

Well balanced design with fully adjustable features to suit any operator



Trimmer Head rotates 180° to enable easy edge trimming

10-1/4" Cutting Width



18V Line Trimmer DUR181Z

Tool only. Battery & charger sold separately. (Also available with Battery and Charger DUR181SF. See makita.ca)

- Adjustable Trimmer Head features 5 angled cutting positions for maximum versatility and ease of operation when trimming around obstacles
- Telescopic Shaft adjusts quickly and easily to suit any operator
- Lock-Off Safety Lever prevents accidental start up

ACCESSORIES

Shoulder Strap



Chest Harness

Trimmer Line 15 m (Twist Line)
Replacement Trimmer Line ideal for Cordless Line Trimmers



197472-9

Construction Series



Demolition Series



Work Gloves are available in medium, large and extra-large sizes

SPECIFICATIONS	DUR364LZ	DUR189Z	DUR187LZ	DUR181Z
Battery Capacities	Two 18V Li-Ion	18V Li-Ion		
Cutting Width	13-3/4" (35 cm)	11-3/4" (29.8 cm)		10-1/4" (26 cm)
No Load Speed	High: 6,500 RPM Low: 5,000 RPM	4,000 RPM / 5,000 RPM / 6,000 RPM		7,800 RPM
Overall Length	69" (175 cm)	63-1/2" (161 cm)	70-1/2" (179 cm)	56-1/2" (143 cm)
Net Weight	8.6 lbs (3.9 kg)	5.8 lbs (2.6 kg)	6.0 lbs (2.8 kg)	5.5 lbs (2.5 kg)

LAWN MOWER / BLOWERS

CORDLESS POWER

18Vx2 17" Lawn Mower

DLM431Z

Tool only. Battery & charger sold separately.

17" Cutting Width



- Perfect for lawns up to 10,000 square feet (950 sq meters)
- Single lever with 13 setting cutting height adjustment - variable from 20 - 75 mm (13/16 inch - 3 inches)
- Ball bearing wheels for less effort required while mowing
- Folding handle for compact storage
- Lawn Mower can be used with or without Grass Catcher Bag

18Vx2 15" Lawn Mower

DLM380Z

Tool only. Battery & charger sold separately.

15" Cutting Width



- Perfect for lawns up to 6,000 square feet (550 sq meters)
- Single lever with 6 setting cutting height adjustment - variable from 20 - 75 mm (1 inch - 3 inches)
- Folding handle for compact storage
- Dual battery charge level indicators
- Lawn Mower can be used with or without Grass Catcher Bag

SPECIFICATIONS	DLM431Z	DLM380Z
Battery Capacities	Two 18V Li-Ion	
Cutting Width	17" (43 cm)	15" (38 cm)
Range of Height	13/16" - 2-15/16" (2 - 7.5 cm)	1" - 2-15/16" (2.5 - 7.5 cm)
Step	13 Steps	6 Steps
Grass Box Capacity	50 L	40 L
No Load Speed	3,600 RPM	3,700 RPM
Overall Length	58-3/4" (149 cm)	53-1/2" (149 cm)
Net Weight	38.2 lbs (17.3 kg)	31.7 lbs (14.4 kg)

Our most
powerful
cordless
blower
yet!

18Vx2 Turbo Blower

DUB362Z

Tool only. Battery & charger sold separately.



Amazing
120 MPH and
473 CFM operation

- 6-stage air volume/velocity settings by dial with variable speed control by trigger
- The trigger also has a lock on function, with button operable from either side of handle
- 3-stage telescopic long nozzle with adjustment range of 100 mm (4")
- Dual LED charge level indicators
- Best grip to frame angle provides optimum nozzle to ground angle for efficient sweeping operation

SPECIFICATIONS	DUB362Z
Battery Capacities	Two 18V Li-Ion
Maximum Air Volume	473 CFM (13.4 m³/min)
Maximum Air Speed	120 MPH (54 m/sec)
No Load Speed	22,000 RPM
Overall Length	32-3/4", 34-3/4", 36-5/8" (83 cm, 88 cm, 93 cm)
Net Weight	6.0 lbs (2.7 kg)

BLOWERS

See page 36 for more
CORDLESS BLOWER ACCESSORIES

CORDLESS POWER



18V Blower Sweeper DUB183Z

Tool only. Battery & charger sold separately.
(Also available with Battery and Charger DUB183SF. See makita.ca)

Unique extended nozzle design for optimum operation directs air flow angle for blowing & sweeping

18V Blower / Vacuum DUB182Z



Optional Long Nozzle with Curved End sold separately (Part No. TP00000199)

Tool only. Battery & charger sold separately.

- eXtreme Protection Technology (XPT) offers maximum protection against dust, debris and liquids for
- Optimal performance in extreme conditions
- Battery capacity warning light indicates ideal time to recharge battery
- Low noise level suitable for use in residential areas and public spaces
- Long blowing nozzle with curved tip for optimal blowing performance
- Shoulder belt for operator convenience

- Low / Medium / High Air Volume Settings with Variable Speed Control within Each Setting
- Ergonomic Soft Rubber Grip design for Vibration Absorption and Comfortable Operation
- Anti-static design to prevent buildup of Static Electricity
- Converts to Vacuum quickly and easily
- Light Weight Design for Reduced Operator Fatigue

LITHIUM-ION BATTERY CHARGERS



4-Port Multi Charger - DC18SF

- Charges two 18V Li-Ion batteries at once
- Charges three or four 18V (3.0 Ah) Li-Ion batteries in 120 minutes



Dual Port Rapid Charger - DC18RD

Dual port design enables two batteries to be charge simultaneously



Rapid Charger - DC18RC

Charges 18V (3.0 Ah) Li-Ion battery in 22 minutes



Standard Charger - DC18SD

Charges 18V (3.0 Ah) Li-Ion battery in 60 minutes



Automotive Charger - DC18SE

Plugs into 12V automotive outlets to enable charging on the go

SPECIFICATIONS	DUB361Z	DUB182Z	DUB183Z
Battery Capacities	Two 18V Li-Ion	18V Li-Ion	
Maximum Air Volume	Low: 92 CFM (2.6 m ³ / min) High: 155 CFM (4.4 m ³ / min)	92 CFM (2.6 m ³ /min)	
Maximum Air Speed	Low: 128 MPH (57 m / sec) High: 208 MPH (93 m / sec)	179 MPH (80 m / sec)	116 MPH (52 m / sec)
No Load Speed	Low: 10,000 RPM High: 17,000 RPM	0 - 18,000 RPM	
Overall Length	35-5/8" (90.5 cm)	20-3/4" (53.5 cm)	33-1/4" (84.5 cm)
Net Weight	4.2 lbs (1.9 kg)	2.9 lbs (1.3 kg)	

4-STROKE POWER

- Exceeds government clean air emission ratings
 - **MM4 Low Noise, Low Emission** engine
 - **Auto Decompression** for easy starting
 - Easy access to spark plug and air filter
 - Lightweight design



MM4
MAKITA MINI 4-STROKE ENGINE

205 MPH
Air Speed

75.6 cc
Backpack Blower

EB7660TH

2
YEAR
WARRANTY

218 MPH
Air Speed

52.5 cc
Backpack Blower

EB5300TH

145 MPH Air Speed

24.5 cc Blower

BHX2500CA

(Also available with Vacuum Kit
BHX2500CAV. See makita.ca)

Vacuum Assembly
197234-5

**Transform the
BHX2500CA
24.5 cc
Blower into a
high-powered
vacuum!**



**Safety
Glasses**



SPECIFICATIONS	EB7660TH	EB5300TH	BHX2500CA
Displacement	75.6 cc	52.5 cc	24.5 cc
Maximum Air Speed	205 MPH	218 MPH	145 MPH
Maximum Air Volume (End Of Nozzle)	705 CFM	512 CFM	356 CFM
Power Rating	3.0 kW / 4.1 hp	1.8 kW / 2.5 hp	0.81 kW / 1.1 hp
Tank Capacity	1.9 L	1.8 L	520 ml
Overall Length	13-1/8" (33.2 cm)	12-5/8" (32 cm)	13-3/4" (35 cm)
Dry Weight	24.1 lbs (10.9 kg)	19.7 lbs (8.9 kg)	9.9 lbs (4.5 kg)

HEDGE TRIMMERS

2-STROKE POWER

- **3 Edge Tooth Design** and High **Anti-Abrasion Coated Surface** for Stain Free Long Lasting Operation
- **Double Sided Stainless Steel Blades** for Extended Life, Clean Trimming and Cutting on Both Sides of Blade
- **Extended 50 Hour Long Life Gear Case Lubrication System**
 - Anti-vibration design for Less Operator Fatigue

22.2cc Hedge Trimmers



28-3/4" Cutting Length

EH7500W



23-1/8" Cutting Length

EH6000W



19" Cutting Length

EH5000W

5 Position Handle



5 Position adjustable rear handle for vertical or angle trimming

SPECIFICATIONS	EH7500W	EH6000W	EH5000W
Displacement	22.2 cc		
Maximum Engine Power	0.68 kW / 0.91 hp		
Cutting Length	28-3/4" (72.8 cm)	23-1/8" (58.8 cm)	19" (48.3 cm)
Fuel Tank Capacity	400 ml		
Overall Length	49-1/2" (125 cm)	44" (111 cm)	40" (101 cm)
Net Weight	11.4 lbs (5.2 kg)	11.0 lbs (5.0 kg)	10.5 lbs (4.8 kg)

ELECTRIC POWER

**Electric
Brake**

25-1/2" Cutting Length

**Hedge
Trimmer**
UH6570


**Electric
Brake**

21-5/8" Cutting Length

Hedge Trimmer
UH5570

- **Ergonomic Soft Rubber Grip** for vibration absorption and comfortable operation
- **2-Hand Operation Switch** for maximum safety
- **Tip Guard** to prevent kick-back while trimming
- **Coated Blades** for improved durability
- Built in **Safety Clutch**
- Easy blade replacement

SPECIFICATIONS	UH6570	UH5570
Cutting Length	25-1/2" (65 cm)	21-5/8" (55 cm)
Strokes Per Minute	1,600 SPM	
AMPS (120V)	4.8 A	
Overall Length	40-1/2" (103.1 cm)	
Net Weight	3.8 lbs (8.4 kg)	3.7 lbs (8.2 kg)



CORDLESS POWER

**18Vx2
Hedge
Trimmer**

DUH651Z

Tools only. Battery & charger sold separately.

25-1/2" Cutting Width



Reduced noise and emissions versus competitive gas models

- Accepts 2 x 18V Li-Ion batteries without a battery converter for use with existing 18V Li-Ion battery platform
- eXtreme Protection Technology (XPT) offers maximum protection against dust, debris and liquids for optimal performance in extreme conditions

**18V
LITHIUM-ION**

22" Cutting Width

**18V
Hedge
Trimmer**
DUH523Z

Tool only. Battery & charger sold separately.
(Also available with Battery and Charger DUH523SF. See makita.ca)

- Battery protection system provides over-discharge, temperature and current protection for enhanced battery performance

**CXT
LITHIUM-ION**

**Chip
Receiver Set**
Standard Equipment
Part No.
198402-3

UH201DZ

7-7/8" Cutting Width

**UH201DZ:
12V MAX
CXT Slide**

**HU01Z:
12V MAX
(1.3 Ah)
Pod**



**12V Hedge
Trimmers**

UH201DZ / HU01Z

Tool only. Battery & charger sold separately.

**Optional Grass Shear
Attachment for UH201DZ or HU01Z**



SPECIFICATIONS	DUH651Z	DUH523Z	UH201DZ	HU01Z
Battery Capacities	Two 18V Li-Ion	18V Li-Ion	12V MAX CXT Li-Ion (Slide)	12V MAX Li-Ion (Pod)
Strokes Per Minute	1,000 - 1,800 SPM	1,350 SPM	2,500 SPM	1,250 SPM
Cutting Width	25-1/2" (65 cm)	22" (56 cm)	7-7/8" (20 cm)	
Maximum Cutting Thickness	11/16" (1.8 cm)	15/32" (1.2 cm)	5/16" (0.8 cm)	
Overall Length	48-1/2" (123 cm)	38" (96.3 cm)	19-7/8" (50 cm)	18-1/8" (46 cm)
Net Weight	8.9 lbs (4.0 kg)	6.0 lbs (2.7 kg)	2.5 lbs (1.1 kg)	2.2 lbs (1.0 kg)

POLE HEDGE TRIMMERS

4-STROKE POWER



With **Adjustable Cutting Heads**
ideal for reaching tall hedges or shrubs



- Complies with CARB Tier 3, EPA Phase 2, EU Stage 2 Emissions Requirements
- *Multi-position Engine Lubrication System* allows Makita 4-Stroke Pole Hedge Trimmers to be operated at any angle for maximum versatility
 - *135° Hedge Trimmer Head Articulation* (-90° - 45°) with 13 positive stops (11.25° increments)
 - *Pin Style Angle Securing System* provides added retention at positive stop angles versus friction securing systems
 - Hedge Trimmer *Blades Fold Up To 180°* to provide compact size during transport or storage
- *Clutch Prevents Engagement Of Hedge Trimmer Head* when folded in the 180° position for maximum safety during transport or storage

25.4cc Pole Hedge Trimmers

With Adjustable Cutting Heads

6'-7" Overall Length

19-1/4" Cutting Length

Short Shaft

EN4951SH



8'-3" Overall Length

19-1/4" Cutting Length

Long Shaft

EN4950H



SPECIFICATIONS	EN4950H	EN4951SH
Displacement	25.4 cc	
Maximum Engine Power	0.77 Kw / 1.03 hp	
Cutting Length	19-1/4" (49 cm)	
Fuel Tank Capacity	0.6 L	
Overall Length	99" (255 cm)	80-1/2" (205 cm)
Net Weight	15.2 lbs (6.9 kg)	14.5 lbs (6.6 kg)

4-STROKE POWER



MM4
MAKITA MINI 4-STROKE ENGINE

With **Fixed Cutting Heads**
for use in vertical cutting applications

- **Short Shaft Style** ideal for vertical cutting of tall hedges and shrubs
 - Complies with **CARB Tier 3, EPA Phase 2, EU Stage 2 Emissions Requirements**
 - **Multi-position Engine Lubrication System** allows Makita 4-Stroke Pole Hedge Trimmers to be operated at any angle for maximum versatility
 - **Wide Trigger Control** and **Soft Rubber Grip** design for comfortable operation

25.4cc Pole Hedge Trimmers

With Fixed Cutting Heads

Double Sided Blades
for versatile cutting utilising
both sides of the blade!

23-1/4" Cutting Length

Short Shaft
EN5950SH

5'-11" Overall Length

2 YEAR WARRANTY

28-3/4" Cutting Length

Short Shaft
EN7350SH

Single Sided Blade
with Chip Receiver Attachment!

6'-27" Overall Length

2 YEAR WARRANTY

SPECIFICATIONS	EN5950SH	EN7350SH
Displacement	25.4 cc	
Maximum Engine Power	0.77 Kw / 1.1 hp	
Cutting Length	23-1/4" (59 cm)	28-3/4" (73 cm)
Fuel Tank Capacity	0.6 L	
Overall Length	70" (178 cm)	75-1/4" (191 cm)
Net Weight	13.2 lbs (6.0 kg)	13.7 lbs (6.2 kg)

POLE CHAINSAW / CULTIVATOR

4-STROKE POWER

CORDLESS POWER

8' to 13'
25.4cc
10" High Reach
Pole Chainsaw
EY2650H25H

Multi-Position Engine Lubrication System

MM4
MAKITA MINI 4-STROKE ENGINE

2
YEAR
WARRANTY

10" Cutting Length

Specialized saw for limbing & pruning in high reach areas

- Telescoping shaft easily adjusts from 8 ft. to 13 ft. allowing access to hard-to-reach branches
- Weighs only 16.0 lbs. with reduced cutting head weight for improved balance and reduced operator fatigue
- Heavy duty dual-stage air filter with large sealing areas is easily accessible

SPECIFICATIONS	EY2650H25H
Displacement	25.4 cc
Chain Pitch / Gauge	3/8" / .050"
Maximum Engine Power	0.77 Kw / 1.1 hp
Maximum Engine Speed	10,000 RPM
Cutting Length	10" (25.5 cm)
Fuel Tank Capacity	600 ml
Oil Tank Capacity	120 ml
Overall Length	154-1/2" (272 cm)
Net Weight	16 lbs (7.2 kg)



4-Stroke Engine Maintenance Kit

for Hedge Trimmers,
Split Shaft Engine Unit
& Pole Chainsaw



18Vx2
Cultivator
HKU01ZX2

13-3/4" Cultivating Width

X2
18V → 18V → 36V

**Highly efficient
lightweight
design!**



Includes battery
converter (BCV02).
Batteries & charger
sold separately.

- Zero Emissions and Low Noise Level ideal for use in sensitive work environments, including residential areas and more
- Adjustable 3-Stage Handle enables positioning at optimal angle of operation or for more compact storage when not in use
- Battery Capacity Warning Light indicates approximate remaining battery power for each battery
- Transport Wheels enable easy movement around the work site and can be folded upright when not in use
- Carrying Handles enable easier loading or unloading from vehicle or trailer
- 2-Step Switch / Handle Lever Starting System and Child Lock Key prevents accidental start up for maximum safety

SPECIFICATIONS	HKU01ZX2
Battery Capacities	36V Li-Ion or two 18V Li-Ion
No Load Speed	Tine Axle Speed: 85 RPM Motor Speed: 4,100 RPM
Cultivating Width	13-3/4" / 8-7/8" (35 / 22.5 cm)
Tine Diameter	9-5/8" (24.5 cm)
Transmission Speeds	1-Forward
Overall Length	47" (119.3 cm)
Net Weight	48.5 lbs (22.2 kg)

CORDLESS POWER

- **Dual Blade** action cuts quickly with shearing effect
- **Battery Warning Light** indicates low battery capacity
- **Compact Design** for added versatility
- **Tool-less Blade Changing System** for easy blade changes
- **Left and Right Hand Lock Off Button** for operator safety

6-5/16"
Cutting Width



18V
LITHIUM-ION
18V Grass Shear
DUM604Z

Tool only. Battery & charger sold separately.

DUM604Z:
with Grass Catcher



12V
LITHIUM-ION
CXT

12V Grass Shears

UM600DZ / MU01Z

Tool only. Battery & charger sold separately.

UM600DZ:
12V MAX CXT Slide

MU01Z:
12V MAX (1.3 Ah) Pod

Grass Catcher enables quick and easy depth adjustment

Optional Hedge Trimmer Attachment
for DUM604Z, UM600DZ & MU01Z

Shear Blade Assembly 198409-9 / Chip Receiver Set 198402-3
Blade Cover 195274-7



Grass Shear Extension Handle
195187-2

For use with 18V or 12V Grass Shears!

ACCESSORIES



SPECIFICATIONS	DUM604Z	MU01Z
Battery Capacities	18V Li-Ion	12V Li-Ion
Strokes Per Minute	2,500 SPM	1,250 SPM
Cutting Width	6-5/16" (16 cm)	
Depth Adjustment	5/8" / 13/16" / 1-5" (1.5 cm / 2 cm / 2.5 cm)	3/8" / 9/16" / 1" (1 cm / 1.5 cm / 2.5 cm)
Overall Length	13-7/8" (35.3 cm)	11-1/2" (29.2 cm)
Net Weight	2.5 lbs (1.1 kg)	2.0 lbs (0.9 kg)

RECIPROCATING SAWS

CORDLESS POWER

With
Sky Hook

With
Sky Hook

Ultra-compact and lightweight
design for maximum versatility
and maneuverability



**18Vx2
Reciprocating Saw
DJR360Z**

**18V
Reciprocating Saw
DJR187Z**

**18V
Reciprocating
Pruning Saw
DJR183Z**

Tool only. Battery & charger sold separately.

Tool only. Battery & charger sold separately.

Tool only. Battery & charger sold separately.

- Accepts two x 18V Li-Ion batteries without a battery converter for use with existing 18V Li-Ion battery platform
- Retractable Sky Hook allows tool to be hung on rafters, pipes or scaffolding
- 2 speed settings provides ideal settings for wood or metal cutting applications

- 2 speed settings provides ideal settings for wood or metal cutting applications
- Newly designed vertical crank mechanism minimizes blade deflection and reduces vibration
- Retractable Sky Hook allows tool to be hung on rafters, pipes or scaffolding

- Multi-position switch (tool handle & tool body) with lock-off levers for easier operation, maximum versatility and operator safety
- Battery protection system provides over-discharge, temperature and circuit protection for enhanced performance, battery cycle life and overall battery life
- One-handed, fast tool-less blade changes
- LED joblight with afterglow feature

ACCESSORIES



See page 33 for more details

SPECIFICATIONS	DJR360Z	DJR187Z	DJR183Z
Battery Capacities	Two 18V Li-Ion	18V Li-Ion	
Maximum Cutting Capacities	Pipe: 5-1/8" (13 cm) Wood (11-3/4" Blade): 10" (25.5 cm)	Pipe: 2" (5 cm) Wood (12" Blade): 2" (5 cm)	
Strokes Per Minute	High: 0 - 3,000 SPM Low: 0 - 2,300 SPM		0 - 3,000 SPM
Length of Stroke	1-1/4" (3.2 cm)		1/2" (1.3 cm)
Overall Length	17-3/4" (44.9 cm)		15-5/8" (39.8 cm)
Net Weight	6.2 lbs (2.8 kg)	6.9 lbs (3.1 kg)	2.7 lbs (1.2 kg)

LOG HOME BUILDING TOOLS

ELECTRIC POWER



12-1/4" Planer

KP312



**2-Blade cutter head makes
24,000 cuts per minute**

- Unrivaled for power, size and performance
- Larger and sturdy sole plate for added stability
- Front roller for easy moving over rough materials
- Guide rule for accurate and maximum use of planing width
- Poly "V" belt designed with grooves efficiently transfers power from the motor to the blades
- Large ejection chute provides high rate of chip discharge



6-3/4" Planer

1806B



30,000 cuts per minute

- Unrivaled for power, size and performance
- Large Base Plate for maximum stability
- Machined Aluminum Base for planing accuracy
- Depth Adjustment Knob for precision planing applications
- Lock-On Button enables easy continuous operation



Includes:
**Wooden
Carrying
Case**



4-3/8" Planer

1002BA



**For even smooth removal
over dips & rises in wood**

- Large Planing Width engineered for an Even Cut
- Precision machined base for notching out logs at a 12-5/8" curved radius
- Planes 4-3/8" width and 3/16" deep in a single pass
- Large ejection chute for high rate of chip discharge
- Conveniently located front and rear grips for operator control
- Lock-On Button enables easy continuous operation
- Smooths and notches out logs for a perfect fit
- Large conveniently located depth settings knob for easy adjustments

Planer Blades



Blade Gauge
Assembly




Bevel Guide

Sharpening
Holder
Assembly

ACCESSORIES

Dressing
Stone

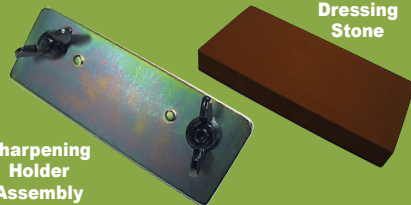

See page 32 for more details

SPECIFICATIONS	KP312	1806B	1002BA
Maximum Capacities	Planing Width: 12-1/4" (31 cm) Planing Depth: 1/8" (.35 cm)	Planing Width: 6-3/4" (17 cm) Planing Depth: 1/16" (.2 cm)	Planing Width: 4-3/8" (11 cm) Planing Depth: 5/32" (.4 cm) Curve Radial Cuts: 11-3/16" (30 cm) Curved Radius: 12-19/32" (32 cm)
No Load Speed	12,000 RPM	15,000 RPM	
AMPS (120V)	15.0 A	10.9 A	9.6 A
Overall Length	21-3/4" (55 cm)	20-3/4" (53 cm)	13-5/16" (34 cm)
Net Weight	40.6 lbs (18.4 kg)	40.6 lbs (18.4 kg)	11.5 lbs (5.2 kg)

LOG HOME BUILDING TOOLS

ELECTRIC POWER



4-3/4" Wheel Sander
9741

Unique design - fast, easy and controlled operation

- Fast and efficient paint and rust removal
- Well balanced design with a low center of gravity and large front loop handle for easy handling

ABRASIVE WHEELS



100G Nylon Wire Brush
Medium Sanding

40G Slit Paper Wheel
Sanding

See page 32 for more details

SPECIFICATIONS	9741
Wheel Size	3-15/16" x 4-23/32" (10 cm x 12 cm)
No Load Speed	3,500 RPM
AMPS (120V)	7.8 A
Overall Length	12-1/4" (31 cm)
Net Weight	9.3 lbs (4.2 kg)



Electric brake

16-5/16" Circular Saw
5402NA

Large capacity for beam and timber cutting

- Powerful Motor delivers 1,800 max watts out
- Rugged Steel Base for maximum stability
- Electric Brake for increased operator safety
- Blade Stabilizer for stable blade rotation and superior cutting performance
- Large Depth Control Lever for convenience and secure adjustments



SUPER JOINT SYSTEM™ SJS

10-1/4" Circular Saw
5104

"SJS" Technology, Electric brake

- "SJS" Technology prevents kickback if blade jams, protecting the operator and the tool
- Electric Brake for increased operator safety
- Lock-Off Button prevents accidental start-up for operator safety
- Diecast Aluminum Base for maximum operational stability
- Compact Blade Case and reduced overall tool height for enhanced operational versatility

SPECIFICATIONS	5402NA	5104
Blade Diameter	16-5/16" (41 cm)	10-1/4" (26 cm)
Arbor	1" (2.5 cm)	5/8" (1.5 cm)
Maximum Cutting Capacities	0": 6-1/4" (15.8 cm) 45": 4-3/16" (10.6 cm)	0": 3-3/4" (9.5 cm) 45": 2-3/4" (6.9 cm)
No Load Speed	2,300 RPM	3,800 RPM
AMPS (120V)	15.0 A	
Overall Length	24-1/4" (61.6 cm)	16" (40.5 cm)
Net Weight	32.2 lbs (14.6 kg)	20.3 lbs (9.2 kg)

ELECTRIC POWER

CORDLESS POWER



**3,200
RPM**

**Chain
Mortiser
7104L**



**Perfect for timber
framing and log
home building**

- Cuts lap joints up to 5-1/8"
- Notches or cuts holes in thick wood stock quickly, cleanly and accurately
- Quick horizontal chain lever for widening holes
- Base mounts onto a max. 12" beam
- Large adjustable vise for attaching firmly onto logs

1/4" Impact Driver DTD170Z

Tool only. Battery & charger sold separately.


BRUSHLESS



**Features NEW 'Cam-Out'
elimination mode and
ULTRA-COMPACT DESIGN**

- eXtreme Protection Technology (XPT) offers maximum protection against dust, debris and liquids for optimal performance in extreme conditions
- 4 stage impact power selection + TEK and 'Cam-Out' modes to ensure precise fastening and prevent damage to fasteners
- 'Cam-out' elimination mode operates at low speed until fastening begins to eliminate 'cam-out' and cross-threading
- TEK mode reduces impact power during final stages of fastener seating
- LED charge level indicator displays approximate remaining battery power

ACCESSORIES



**Threaded
Rod Sockets**



Hollow Sockets

See page 32 for more details

SPECIFICATIONS	DLM431Z
Capacities	Max Hole Width (Longitudinal): 5-1/8" (13 cm) Max Hole Width (Transverse): 1-1/4" (3.1 cm) Max Hole Depth: 6-1/8" (15 cm)
No Load Speed	3,200 RPM
AMPS (120V)	10.5 A
Overall Length	20-1/8" (51 cm)
Net Weight	38.1 lbs (17.3 kg)

SPECIFICATIONS	DTD170Z
Battery Capacities	18V Li-Ion
Hex Shank	0 - 3,600 / 3,200 / 2,100 / 1,100 RPM
Impacts Per Minute	0 - 3,800 / 3,600 / 2,600 / 1,100 IPM
Maximum Fastening Torque	1,550 in. lbs (175 Nm)
Overall Length	4-5/8" (11.7 cm)
Net Weight	2.0 lbs (0.9 kg)

GENERATORS

4-STROKE POWER

Electric start



8.2 Hours
of continuous operation



6.6 Hours
of continuous operation



6.8 Hours
of continuous operation

12,000W
653cc Generator
G12000R

Starting battery not included

7,100W
404cc Generator
EG711A

5,100W
287cc Generator
EG511A

GENERATOR FEATURES & BENEFITS	G12000R FEATURES IDLE MODE	EG711A	EG511A
Receptacles	Duplex 120V (20 AMP) Locking 120V (20 AMP) Locking 120V (30 AMP) Locking 120V / 240V (30 AMP)		Duplex 120V (20 AMP) Locking 120V (20 AMP)
Generator	Full copper windings, AC & DC circuit breakers, Automatic Voltage Regulator		
Engine	EX series Subaru-Robin™ 4-cycle engine		

ACCESSORIES

Generator & Water Pump Wheel Kits

110004-B

For models: G2800J, EG301A

110004-C

For models: EG511A, EG711A, G12000R

110004-D

For models:
EW220R, EW320R, EW320TR









SPECIFICATIONS	G12000R	EG711A	EG511A
Maximum Output Current	12,000W (100 / 50 AMP)	7,100W (59.2 / 29.6 AMP)	5,100W (42.5 / 21.3 AMP)
Rated Output Current	9,500W / 79.2 / 39.6 A	5,000W / 41.6 / 20.8 A	4,200W / 35.0 / 17.5 A
AC Voltage	60 Hz (120V / 240V)		
DC Voltage	12 VDC (8.3 AMP)		
Displacement	653 cc	404 cc	287 cc
Maximum Power	22 hp @ 3,600 RPM	12.5 hp @ 4,000 RPM	9.5 hp @ 4,000 RPM
Fuel Tank Capacity	44 L	22 L	17.8 L
Noise Level	77 dB	75.5 dB	74 dB
Overall Length	32.5" (82.6 cm)	28-1/2" (72.5 cm)	26-1/2" (67.5 cm)
Dry Weight	310.0 lbs (141 kg)	189.6 lbs (86 kg)	152.1 lbs (69 kg)

Why professionals prefer Makita generators and water pumps powered by **EX series Subaru-Robin™ 4-cycle engines**

- Case-hardened steel timing chain allows for precision timing and maximum durability
- Heavy-duty piston rings and a cast-iron cylinder liner resist wear and ensure a long engine life
- Hardened steel rocker arms with precision tappet adjusters are used for greater durability and reduce service requirements
- Dual ball bearing crankshaft offers maximum durability under load
- Chain-driven overhead cam design offers superior power and performance with an automatic decompression system to reduce the required pulling force by 30% to 40%. EX engines start easily – even in cold Canadian winters.
- Cooling fins cast into the interior and exterior of the block maximize surface area for superior engine cooling
- Electronic ignition, low oil shut-off and automatic idle / full power throttle control

WATER & TRASH PUMP **ACCESSORIES**

Water & Trash Pump Accessories				
	Description	Size	For Model(s)	Part No.
	PVC Suction Hoses (Non-Collapsible)	1" x 20'	EW120R / EW1050H	123048-A
		2" x 20' (Includes Male / Female Fittings)	EW220R / EW2050H	123042-A
		3" x 20' (Includes Male / Female Fittings)	EW320R / EW320TR EW3050H	123043-A
	PVC Discharge Hoses	1" x 25'	EW120R / EW1050H	123049-A
		1" x 50'		128049-A
		2" x 50' (Includes Male / Female Fittings)	EW220R / EW2050H	123045-A
		3" x 50' (Includes Male / Female Fittings)	EW320R / EW320TR EW3050H	123046-A
	Replacement Gaskets for Female Fittings	2"	EW220R / EW2050H	421002-A
		3"	EW320R / EW320TR EW3050H	421003-A
	Strainer	1"	EW120R	480-02550-29
			EW1050H	ME01689268
		2"	EW220R / EW2050H	480-05050-29
		3"	EW320R / EW320TR	480-08310-33
	Tool Kit	-	EW120R	5929002000
			EW220R / EW2050H EW320R / EW320TR	277-90301-H0
	Spanner Wrench	2" Hose	EW220R / EW2050H	781001-A
		3" Hose	EW320R / EW320TR EW3050H	781002-A

Generator & Water Pump Wheel Kits

- Constructed of rugged tubular steel
- Mounts directly to frame for easy portability
- Pneumatic wheels for easy transport on the jobsite

Generator & Water Pump Wheel Kits	
For Model(s)	Part No.
G2800I / EG301A	110004-B
EG511A / EG711A / G12000R	110004-C
EW220R / EW320R / EW320TR	110004-D



Approximate Wattage Requirements	Generator Selection Chart		
Starting / Running	G12000R	EG711A	EG511A
CENTRAL AIR 32,000 BTU 11,500 / 5,500 24,000 BTU 8,800 / 3,800 ELECTRIC WELDER 200 AMP A/C 9,000 / 9,000			
CLOTHES DRYER 7,100 / 5,750 AIR COMPRESSOR 3 hp 6,800 / 3,000 2.5 hp 5,900 / 2,500			
AIR COMPRESSOR 2 hp 5,100 / 2,000 CIRCULAR SAW 3,700 / 1,400 SUMP PUMP 1/2 hp 3,200 / 1,050 WELL PUMP 1/2 hp 3,100 / 1,000			
FURNACE FAN 1/2 hp 3,000 / 875 WASHING MACHINE 3,000 / 750 REFRIGERATOR 2,900 / 700			
COFFEE MAKER 1,750 / 1,750			
MICROWAVE 750W 1,550 / 750 DRILL 1,500 / 600 BATTERY CHARGER 15 AMP 1,200 / 500 CHAINSAW 2 hp 1,100 / 1,100 COMPUTER 700 / 700 TELEVISION 300 / 300	12,000W	7,100W	5,100W

This chart is for reference only. The wattage requirements for your appliance, motor, or tool may require more or less wattage than is listed in this chart. Please refer to your owners manual to verify whether or not your generator is appropriate for the equipment you wish to run. You may also contact your local Makita Factory Service Centre for additional information if you plan on purchasing a new generator.

Note: All wattage requirements are approximate. Values are subject to change without notice



G12000R
8.2 Hours
12,000W / 653 cc
GENERATOR



EG711A
6.6 Hours
7,100W / 404 cc
GENERATOR



EG511A
6.8 Hours
5,100W / 287 cc
GENERATOR

TRASH & WATER PUMPS

4-STROKE POWER

- EW320TR & EW3050H Powered by **EX Series Subaru-Robin™ 4-cycle Engines**
- Meets **EPA / CARB** emission standards
- **Self Priming Centrifugal Pump** for easy operation



2.3 Hours
of continuous operation

92' Total Head*

3" Suction / Discharge Diameter

**9.0 hp
Trash Pump**
EW320TR



2 Hours
of continuous operation

105' Total Head*

3" Suction / Discharge Diameter

**5.7 hp
Water Pump**
EW3050H



0.9 Hours
of continuous operation

135' Total Head*

1" Suction / Discharge Diameter

**1.0 hp Centrifugal
Water Pump**
EW1050H

* Total head: Total height at sea level, to which water can be raised above original water level.

STRAINERS

Available for 1", 2" and 3" diameter suction hoses



PVC SUCTION HOSES NON-COLLAPSIBLE

Available for 1", 2" and 3" diameter trash and water pumps

ACCESSORIES

PVC DISCHARGE HOSES

Available for 1", 2" and 3" diameter trash and water pumps




SPECIFICATIONS	EW320TR	EW3050H	EW1050H
Suction Head	26' (8.0 m)		29' (8.7 m)
Maximum Pumping Capacity: Litres Per Minute	1,300 LPM	1,000 LPM	110 LPM
Fuel Mix	No Fuel Mixing		
4-Stroke Oil	10W-30		
Fuel Tank Capacity	6.1 L	3.2 L	500 ml
Overall Length	26.5" (67.2 cm)	20-3/4" (52.7 cm)	12-1/2" (31.9 cm)
Dry Weight	106.9 lbs (48.5 kg)	54.9 lbs (24.9 kg)	12.8 lbs (5.8 kg)

POWER CUTTER ACCESSORIES

14" 3D PREMIUM Diamond Blade

T-02836

PREMIUM PROFESSIONAL PERFORMANCE



- Features 3D Diamond Grid Technology incorporating even placement of diamond content throughout the segment
- 3D pattern releases worn diamond and exposes sharp diamond at a consistent rate
- Offers premium professional performance versus traditional diamond blades
- Keyhole expansion slots promotes blade cooling
- Laser welded segments ensure the strongest possible joint
- Segmented style rim
- Ideal for concrete, asphalt, brick and block

14" Metal Cutting Blade for Power Cutters

A-96229

FASTEST CUTTING MORE CUTS



- Offers up to 100x the life of abrasive wheels
- Ideal for cutting angle iron, rebar, deck plating, steel studs, pipe and more!
- Premium diamond content for long life and fast cutting
- Expertly balanced premium steel core for reduced vibration and noise
- Vacuum brazed diamond segments for optimum operational life and consistent performance
- Eliminates performance issues of abrasive wheels, including disc shrinkage, glazing and shattering
- Segmented Rim style reduces heat buildup and maximizes material removal

Optimum™ Diamond Blades

OPTIMUM Series Diamond Blades utilize the optimum bond matrix for faster, smoother cuts and longer blade life

Segmented Rim



General purpose quick cutting blade for concrete, tile, brick & stone

Turbo Rim



Fast and clean cutting blade for all applications

OPTIMUM™ Diamond Blades

Blade Diameter	Arbor	Rim Type	Wet / Dry	Material Type	Application	Max. RPM	For Model(s)	Part No.
16"	1" 20 mm	Segmented Rim	Wet or Dry	Medium	Cured Concrete, Block, Brick, Masonry	4,800 RPM	EK8100	A-94742
14"	1" 20 mm	Turbo Rim	Wet or Dry	Hard	Granite, Ceramic, Stone	5,400 RPM	4114 EK6101 EK7301 / HD EK7651H / HD	A-94627
		Medium		Cured Concrete, Block, Brick, Masonry	A-94736			
		Medium & Soft (Dual Purpose)		Concrete & Asphalt	T-01270			
		Soft		Asphalt, Unset Concrete, Sandstone	A-94655			
12"	1" 20 mm	Segmented Rim	Wet or Dry	Medium	Cured Concrete, Block, Brick, Masonry	6,300 RPM	4112H DPC6430	A-94720
				Medium & Soft (Dual Purpose)	Concrete & Asphalt			T-01264



POWER CUTTER ACCESSORIES

14" Vacuum Brazed Diamond Rescue Wheel - B-57009

- Developed specifically for rescue operations, including cutting through airplanes, trains and crash barriers
- A time and cost saving alternative to multi-material cutting applications for contractors and renovators
- Vacuum brazed diamond segments for optimum operational life and consistent performance
- Ideal for cutting steel, stainless steel, alloys, aluminum, resin, PVC, concrete, reinforced glass, fibre-reinforced plastics and more!
- Ideal for use with Makita 14" Angle & Power Cutters!

10L Power Cutter Pressurized Water Tank 988 394 610

Enables Dust Free Operation When Direct / Main Water Sources Are Not Available



Power Cutter Guide Trolley

Power Cutter Shown Sold Separately




Power Cutters Filters & Accessories


Filter Type	DPC6430	EK6101	EK7301 EK7301HD	EK7651H EK7651HD	EK8100
 Foam Filter	395 173 081	N/A	395 173 081	195945-6	395 173 081
 Paper Filter	395 173 011	315 173 010	395 173 011	442165-6	395 173 011
 Nylon Filter	395 173 021	315 173 020	395 173 021	424399-3	395 173 021
 Filter Sets (5 Pcs)	957 173 160	N/A	957 173 611	N/A	957 173 611

Part No.	Description	Includes	For Models
394 369 600	• Heavy Duty Tubular Aluminum Construction • Ideal for maintaining precise cutting position and depth during operation	• Water Tank • Water System • Depth Limiter	DPC6430 EK7301 / HD EK8100
394 369 610			EK7651H / HD


Power Cutter Guide Roller

394 114 271	Description	For Models
	Enables fatigue free operation and increased precision during long distance horizontal cutting applications	DPC6430 EK7301 / HD EK8100

Angled Fuel Filter

395 114 300	Description	For Models
	Installs quickly and easily to enable fuel re-filling while the power cutter is in the upright position or fitted to a guide trolley	DPC6430 EK7301 / HD EK8100

Power Cutter Service Set

957 394 004	Description	For Models
	• Drive Belt, • Fuel Cap (2 ea.) • Starter Cord (2 ea.) • Combination Wrench • Spark Plug • Fuel Filter	DPC6430 EK7301 / HD EK8100

Power Cutter Filter Oil & Cleaner

Part No.	Description	For Models
980 008 627	Power Cutter Filter Cleaner (0.5 L)	DPC6430 EK6101 EK7301 / HD EK7651H / HD EK8100
980 008 628	Power Cutter Filter Oil (1.0 L)	
980 008 629	Power Cutter Filter Cleaner & Oil Set	

Abrasive Wheels

Wheel Diameter	Arbor	Thickness	Wet / Dry	Application	Max RPM	For Model(s)	Part No.
16"	20 mm	3/16"	Wet / Dry	Concrete, Stone, Masonry & Asphalt	4,250 RPM	EK8100	966 161 020
			Dry	Steel & Ferrous Metals			966 161 050
14"	1"	5/32"	Wet / Dry	Concrete, Stone, Masonry & Asphalt	5,500 RPM	EK7301HD	966 144 120
		3/16"	Dry	Steel & Ferrous Metals		EK7651HD	966 144 150
	20 mm	5/32"	Wet / Dry	Concrete, Stone, Masonry & Asphalt		EK6101	966 141 120
		3/16"	Dry	Steel & Ferrous Metals		EK7301 EK7651H	966 141 150
12"	20 mm	1/8"	Wet / Dry	Concrete, Stone, Masonry & Asphalt	5,400 RPM	DPC6430	966 121 120
			Dry	Steel & Ferrous Metals	6,400 RPM		966 121 150

LOG HOME BUILDING TOOLS ACCESSORIES

Planer Blades




Style	Description	For Models	2 / Pk Part No.
4-3/8"	High Speed Steel - Single Edge	1002BA 1911B	793008-8
	Carbide - Single Edge		D-17245
6-3/4"	High Speed Steel - Single Edge	1806B	D-63666
12"	High Speed Steel - Double Edge Reversible	2012NB	793346-8

Visit makita.ca for our full line of **PLANER BLADES & ACCESSORIES**

Wheel Sander Abrasive Wheels

Description	Grit	Application	For Model	Part No.
 Slit Paper Wheel	40G	Sanding	9741	794380-1
 Wire Brush Wheel	-	Metal Finishing		794382-7
 Cotton Buff Wheel	-	Polishing		794381-9
 Nylon Brush Wheel	40G	Coarse Sanding		794384-3
	100G	Medium Sanding		794379-6
	200G	Fine Sanding		794383-5

Hollow Sockets



Enables fast and effortless installation of 3/8" and 1/2" threaded rod

- Available for 3/8" (B-51611) and 1/2" (B-51627) threaded rod
- 1/4" hex shank
- Use with Makita Drills / Drivers, Hammer Drills / Drivers **(DO NOT OPERATE IN HAMMER MODE)** or Impact Drivers

Hollow Sockets



Socket Size	Threaded Rod / Bolt Size	Length	Application	Shank	Part No.
7/16"	1/4"	3"	Nuts	1/4" Hex	B-50784
		6"	Bolts		B-50790
		12"	Threaded Rod		B-50809
		18"			B-50815
		24"			B-50821
9/16"	3/8"	3"	Nuts		B-43290
		6"	Bolts		B-43309
		12"	Threaded Rod		B-43315
		18"			B-43321
		24"			B-43337
3/4"	1/2"	3"	Nuts		B-43343
		6"	Bolts		B-43359
		12"	Threaded Rod		B-43365
		18"			B-43371
		24"			B-43387
15/16"	5/8"	3"	Nuts		B-50837
		6"	Bolts		B-50843
		12"	Threaded Rod		B-50859
		18"			B-50865
		24"			B-50871


Circular Saw Blades



Blade Diameter	Arbor	# of Teeth	Grind Angle	Hook Angle	Kerf	Max. RPM	Material	For Model(s)	Part No.
16-5/16"	1"	32 CT	ATB	20°	.091"	3,680	Wood	5402NA	A-95093
		60 CT	FTG	20°	.102"	4,300			792118-8
10-1/4"	5/8"	24 CT	-	-	-	5,870		5104 HS0600	A-94910

RECIPROCATING SAW / HEDGE TRIMMER ACCESSORIES

Reciprocating Saw Blades								
Length	TPI	Width	Thickness	Material	Blade Type	Recommended Use	Part No.	Pk
Masonry								
8"	Tungsten Carbide Grit	3/4"	.040"	-	Straight Back	Brick, Tile, Marble, Stone, Chalkboard, Cast Iron, Melamine, Veneer & Fibreglass	723077-A-2	2 / Pk
9-1/2"	2 Carbide Teeth	1"	.0625"	-	Straight Back	Aerated Concrete, Concrete Block & Brick, Low Aggregate Concrete & Masonry, Abrasive Materials	B-12809	1 / Pk
12"	2 Carbide Teeth	2"	.0625"	-	Straight Back	Aerated Concrete, Concrete Block & Brick, Low Aggregate Concrete & Masonry, Abrasive Materials	B-10394	1 / Pk
Wood Cutting								
8"	Progressive	3/4"	.050"	High Carbon Steel	Taper Back	Fast, Clean Cutting in Wood from 1/4" - 4"	723078-A-5	5 / Pk
9"	3	3/4"	.050"	High Carbon Steel	Taper Back	Very Fast, Aggressive Cutting in Green Wood from 5/8" - 6"	723053-A-5	5 / Pk
9"	6	3/4"	.050"	High Carbon Steel	Taper Back	Very Fast, Aggressive Cutting in Green Wood from 5/8" - 6"	723052-A-5	5 / Pk
Specialty								
6"	6	3/4"	.050"	Stainless Steel	Straight Back	Bone, Horn, Frozen Foods, Ice, Pruning	B-52043	1 / Pk
9"	6	3/4"	.050"	Stainless Steel	Straight Back	Bone, Horn, Frozen Foods, Ice, Pruning	B-30564	1 / Pk
9"	10	3/4"	.050"	Stainless Steel	Straight Back	Meat, Frozen Foods, Ice	B-30570	1 / Pk
12"	6	3/4"	.050"	Stainless Steel	Straight Back	Bone, Horn, Frozen Foods, Ice, Pruning	B-23248	1 / Pk
12"	10	3/4"	.050"	Stainless Steel	Straight Back	Meat, Frozen Foods, Ice	B-23254	1 / Pk
7"	8.5	3/4"	.024"	High Carbon Steel	Straight Back	Green Wood, Pruning	B-56580	1 / Pk
7"	15	3/4"	.024"	High Carbon Steel	Straight Back	Green Wood, Pruning, Bamboo, PVC	B-56596	1 / Pk
9"	8.5	3/4"	.035"	Bi-Metal	Straight Back	Green Wood, Pruning	B-57386	1 / Pk
9"	15	3/4"	.035"	Bi-Metal	Straight Back	Green Wood, Pruning, Bamboo, PVC	B-57392	1 / Pk
10"	8.5	3/4"	.039"	High Carbon Steel	Straight Back	Green Wood, Pruning	B-62016	1 / Pk

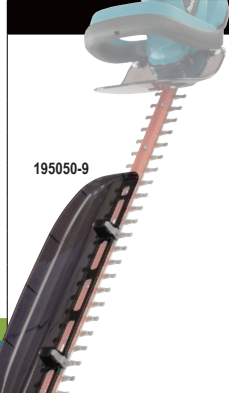Hedge Trimmer Accessories			
 195050-9	Blade Cover Part No.	Chip Receiver Part No.	For Models
	195274-7	198402-3	UH201DZ
	450490-1	194681-1	DUH651Z, UH5570, UH6570
	451868-1	451866-5	EN7350SH
	452327-8	-	EH6000W
	452328-6	-	EN401MP, EN4950H
	453723-3	195050-9	DUH523Z
	454277-3	-	EH7500W
	454278-1	-	EN5950SH
	454279-9	-	EH5000W, EN410MP, EN4951SH
	457036-4	-	EN420MP



CHAINSAW ACCESSORIES

Chain Saw Bar and Chain Reference Chart

Saw Chain Loops



Guide Bars



Models	Bar Length	Gauge	Pitch	Chain Part No.	Chain Type	Bar Mount	Drive Link	Bar Part No.	Cover Part No.	File Size
Cordless / Electric Chainsaws										
DUC122	4-1/2" / 11.5 cm	.050"	1/4"	791284-8	25AP	N/A	42	158476-6	416311-7	5/32"
DUC302	12" / 30 cm	.043"	3/8"	531 290 046	90PX	A041	46	165245-8	419288-5	4.5 mm
DUC353 DUC400	12" / 30 cm	.043"	3/8"	196740-7	90PX	A041	46	165245-8	419288-5	4.5 mm
	14" / 35 cm	.043"	3/8"	196741-5	90PX	A041	52	165246-6	419288-5	4.5 mm
	16" / 40 cm	.043"	3/8"	196742-3	90PX	A041	56	165247-4	419242-9	4.5 mm
UC3530A UC3551A	14" / 35 cm	.050"	3/8"	528 092 652	91PX	A041	52	165201-8	419288-5	5/32"
UC4030A UC4051A	16" / 40 cm	.050"	3/8"	531 492 656	91PX	A041	56	165202-6	419242-9	5/32"
Specialty Chainsaws										
EY2650H25H	10" / 25 cm	.050"	3/8"	196142-7	91PX	A318	39	165695-7	452093-7	5/32"
EY401MP	10" / 25 cm	.050"	3/8"	196142-7	91PX	A318	39	165695-7	452093-7	5/32"
Gas Powered Chainsaws										
EA3201 EA3501, EA3601	14" / 35 cm	.050"	3/8"	528 092 652	91PX	A041	52	165201-8	419288-5	5/32"
	16" / 40 cm	.050"	3/8"	531 492 656	91PX	A041	56	165202-6	419560-5	5/32"
EA4300	18" / 45 cm	.050"	.325"	512 484 672	95VP	K041	72	444 045 141	419560-5	3/16"
DCS5121	18" / 45 cm	.058"	.325"	523 686 072 528 086 072	21LP	K095	72	443 045 661	952 020 640	3/16"
EA5600	18" / 45 cm	.058"	3/8"	523 099 064	73LP	K095	64	445 045 651	952 020 640	7/32"
EA6100	21" / 53 cm	.058"	3/8"	528 099 672	73LP	K095	72	443 053 651	952 020 650	7/32"
DCS6421 EA7300	18" / 45 cm	.058"	3/8"	523 099 068	73LP	D009	68	445 045 655	952 020 640	7/32"
	20" / 50 cm	.058"	3/8"	523 099 072	73LP	D009	72	445 050 652 445 050 655	952 020 650	7/32"
	24" / 60 cm	.058"	3/8"	523 099 084	73LP	D009	84	445 060 652	952 020 660	7/32"
	28" / 70 cm	.058"	3/8"	523 099 092	73LP	D009	92	445 070 652	N/A	7/32"

Chainsaw Case

B-70777



Description

- Constructed from heavy duty ABS plastic
- Ideal for safe and secure storage and transportation of your Makita Chainsaw

For Models

EA3201SRDB
EA3501SRDB
EA3601FRDB
EA4300FREC
DCS5121REJ
EA5600FREE

6" File Handle 953 004 010



Chainsaw Files & File Sets

File Sets Includes File, Handle & Guide



Type	File Size	Part No.
Round	5/32"	953 030 010
	3/16"	953 030 030
	7/32"	953 009 000

File Sets Bulk 12 / Pk



Type	File Size	Part No.
Round	5/32"	953 003 090
	11/64"	953 003 100
	3/16"	953 003 070
	13/64"	SD 13/64"
	7/32"	953 003 040



**42.4cc Chainsaw
EA4300FREC**

CHAINSAW ACCESSORIES


18" Rescue Cut Bar & Chain For Chainsaw EA7300



957 415 060

- Solid tungsten carbide teeth offer quick cutting ability in a variety of materials such as wood, shingles, metal (steel, aluminum, copper & alloys up to 3/64" thick), aerated concrete blocks, car bodies, railway cars and more!
- Features depth limiter for use when cutting blind ventilation holes
- Commonly used by rescue services, fire departments, contractors and more!
- Includes: chain bar, 18" rescue chain, depth limiter

Oils & Lubricants











	Qty.	Particulars	Item #
	48	50:1 Synthetic 2 Cycle Oil (3.8 L / 1 Gallon Mix)	T-00745C-48
		50:1 Synthetic 2 Cycle Oil (9.5 L / 2.5 Gallon Mix)	T-00739C-48
	6	50:1 - 2 Cycle Oil (200 ml / 6.8 fl. Oz.)	181114-A6P
	48		181114-ACS
	4	Heavy (Summer) Chain Oil (4 x 1 Gallon)	181116-ACS2
		Light (Winter) Chain Oil (4 x 1 Gallon)	181120-ACS2

Safety Equipment





T-01703	FACE SHIELD	T-01638	T-01622	Chainsaw Safety Pants	MSP28-30	Size 28/30
Safety Helmet Complete Head, hearing & face protection 	Forestry Face Screen 	Brush Guard Visor 	Chain Saw Safety Chaps One size fits all 		T-01650	Size 32/34
					T-01666	Size 36/38
					T-01672	Size 40/42
					MSP44-46	Size 44/46





Split shaft attachments use a **quick release** accessory mounting system!





SPLIT SHAFT UNIT ATTACHMENTS



										
Split Shaft Attachment Features & Benefits	Straight shaft style preferred by professionals due to a longer reach Includes Parts for Brush Cutter. Blade Sold Separately	Straight shaft style preferred by professionals due to a longer reach	Curved shaft style preferred for lighter weight and compact size	Ideal for pruning branches in hard to reach areas	Ideal for cultivating small garden beds and between existing rows of vegetables or flowers	Quickly and easily cuts through turf to define edge of garden beds, sidewalks, driveways and more	Ideal for trimming hard to reach hedges. 135° cutting radius for maximum versatility of operation	Ideal for trimming hard to reach areas of hedges and bushes	Compact and lightweight design ideal for trimming hedges and shrubs. Short cutting length enables effective trimming of grasses, climbing plants and small scrub brush	Enables operator to achieve added reach when used with Pole Hedge Trimmer Attachment (EN400MP) or Pole Chain Saw Attachment (EY401MP)
Split Shaft Attachment Compatibility	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH	EX2650LH	EX2650LH	EX2650LH	EX2650LH DUX60Z
Split Shaft Attachment Specifications	Cutting Width: 16-1/2" (420 mm) Spindle Size / Thread: M10, Left Handed Overall Length: 34-1/2" (876 mm) Overall Length: 34-1/2" (876 mm) Net Weight: 2.2 lbs. (1.0 kg)	Cutting Width: 16-1/2" (420 mm) Spindle Size / Thread: M10, Left Handed Overall Length: 34-1/2" (876 mm) Net Weight: EM400MP 2.2 lbs. (1.0 kg) EM405MP 2.8 lbs. (1.3 kg)	Cutting Width: 16-1/8" (410 mm) Spindle Size / Thread: M8, Right Handed Overall Length: 27-3/4" (703 mm) Net Weight: 1.2 lbs. (0.5 kg)	Guide Bar Length: 10" (255 mm) Chain Gauge: 0.043" (1.09 mm) Overall Length: 46" (117 cm) Net Weight: 2.4 lbs. (1.1 kg)	Outer Blade Diameter: 9-1/8" (232 mm) Cultivating Width: 6-61/64" (160 mm) Overall Length: 38" (965 mm) Net Weight: 6.5 lbs. (2.9 kg)	Blade Diameter: 8" (203 mm) Overall Length: 35-1/2" (889 mm) Net Weight: 5.4 lbs. (2.4 kg)	Cutting Width: 21" (535 mm) Cutting Radius: 135° (90° / 45°) Shaft Length: 59" (150 cm) Net Weight: 5.4 lbs. (2.4 kg)	Cutting Length: 19-1/4" (490 mm) Shaft Length: 43-1/2" (110 cm) Net Weight: 4.5 lbs. (2.0 kg)	Cutting Width: 9-7/8" (250 mm) Cutting Radius: 135° (90° / 45°) Shaft Length: 54-1/2" (138 cm) Net Weight: 5.5 lbs. (2.5 kg)	Overall Length: 45" (114 cm) Net Weight: 2.5 lbs. (1.13 kg)

BRUSH CUTTER / LINE TRIMMER ACCESSORIES

Brush Cutter & Clearing Blades						Model No.	EBH253U	EBH341U
Model	Description	Diameter	Arbor Size	Teeth				
	B-14118	4-Point Blades	9"	1"	4 T		•	•
	385 224 140		10"	20 mm				
	B-14124			1"				•
	195298-3	3-Point Blade	9"	1"	3 T		•	•
	380 224 180	Eddy Blades	8"	20 mm	8 T			
	385 224 200		10"					
	B-14168	Saw Blade	10"	1"	80 T			•

Trimmer Line 15 m			
 			
Ideal for Cordless Line Trimmers			
<div><div>Twist Line</div><div>Spiral Line</div></div>			
Description	Length	Diameter	Part No.
Twist Line	50' (15 m)	0.080" (2 mm)	197472-9
Spiral Line		0.106" (2.7 mm)	198505-3
		0.094" (2.4 mm)	198501-1

			Line Trimmer Heads														
			Line Trimmer Model (CC / LXT)	EBH253U 24.5 cc	EBH341L 33.5 cc	EBH341U 33.5 cc	DUR181Z 18V LXT	DUR182LZ 18V LXT	DUR187LZ 18V LXT	DUR364LZ 18V/42 LXT	EBH341L 33.5 cc	ER2600L 25.7 cc	EM2600L 25.7 cc	EBH253L 24.5 cc	ER2550LH 24.5 cc	EX2650LH (ER400MP) 25.4 cc	EX2650LH (EM400MP) 25.4 cc
			Thread Direction of Trimmer Spindle	LH	LH	LH		LH	LH	LH	LH	RH	LH	LH	RH	RH	LH
 B-70275	Model	Line Feed System	Notes														
	B-70275	Auto	16" Cutting Width	.		.							.				
	B-02945											.					
 6218020001	6218020001	Bump Feed	18" Cutting Width									.					
	DA00000454		17" Cutting Width									.					
	196324-1		16-1/2" Cutting Width								
	122980-1		16-1/8" Cutting Width												.	.	
	126048-5		16" Cutting Width		
	B-05131		14" Cutting Width		.	.					.						
	197297-1		15-3/4" Cutting Width							.							
	DA00000655		11-3/4" Cutting Width									.					.
	195149-0		10-1/4" Cutting Width														
	198385-7								.								
 195858-1	195858-1		10-1/4" Cutting Width				.										
	196146-9					.											
B-02951	B-02951	Manual	18" Cutting Width										.				

Cordless Blower Accessories			
 	Description	For Model No.	Part No.
	Front Nozzle	DUB362	455914-2
	Extension Nozzle		456957-7
	Flat Nozzle		456958-5
	Long Curved Nozzle	DUB361	452123-4
		DUB182, DUB183	TP00000199

[illegible]

Makita Canada Order Desk & Distribution Centres

Western Canada

Phone: 604 272-3104

Toll Free Phone: 1 800 663-0909

Toll Free Fax: 1 800 667-7078

Email: orderdeskmcv@makita.ca

Central, Québec & Eastern Canada

BILINGUAL SERVICE

Phone: 905 571-2200

Toll Free Phone: 1 800 263-3734

Toll Free Fax: 1 800 565-0906

Email (English): orderdeskmct@makita.ca

Email (Français): orderdeskmcq@makita.ca

Factory Service Centres

13 Locations From Coast To Coast

Richmond / Vancouver

11771 Hammersmith Way,
Richmond, BC. V7A 5H6

Phone: 604 272-3104

Toll Free: 1 800 663-0909

Fax: 604 272-5416

Burnaby / Vancouver

2288 Holdom Avenue,
Burnaby, BC. V5B 4Y5

Phone: 604 291-1511

Toll Free: 1 877 295-1511

Fax: 604 291-1599

Calgary

#8 - 6115 4th Street SE,
Calgary, AB. T2H 2H9

Phone: 403 243-3995

Toll Free: 1 800 267-0445

Fax: 403 287-3044

Edmonton

11614 - 149 Street NW,
Edmonton, AB. T5M 3R3

Phone: 780 455-6644

Toll Free: 1 888 455-6644

Fax: 780 451-4877

Saskatoon

206A - 2750 Faithful Avenue,
Saskatoon, SK. S7K 6M6

Phone: 306 931-0111

Toll Free: 1 888 931-0111

Fax: 306 931-4574

Winnipeg

1670 St. James Street,
Winnipeg, MB. R3H 0L3

Phone: 204 694-0402

Toll Free: 1 800 550-5073

Fax: 204 694-5782

London

317 Adelaide Street S. Unit 117,
London, ON. N5Z 3L3

Phone: 519 686-3115

Toll Free: 1 800 571-0899

Fax: 519 686-4347

Mississauga / Toronto

6350 Tomken Road Unit 8,
Mississauga, ON. L5T 1Y3

Phone: 905 670-7255

Toll Free: 1 888 221-9811

Fax: 905 670-0120

Whitby / Toronto

1950 Forbes Street,
Whitby, ON. L1N 7B7

Phone: 905 571-2200

Toll Free: 1 800 263-3734

Fax: 1 800 867-1683



Makita Canada Head Office & Distribution Centre



Ottawa / Nepean

210 Colonnade Road, Unit 11,
Ottawa, ON. K2E 7L5

Phone: 613 224-5022

Toll Free: 1 888 560-2214

Fax: 613 224-2360

Montreal / St. Leonard

6389 Boulevard Couture,
St. Leonard, QC. H1P 3J5

Phone: 514 323-1223

Toll Free: 1 800 361-7049

Fax: 1 800 561-5953

Québec City / Les Saules

1200 St. Jean Baptiste Unit 106,
Québec, QC. G2E 5E8

Phone: 418 871-5720

Toll Free: 1 800 663-5757

Fax: 418 871-6684

Dartmouth / Halifax

204 Brownlow Avenue, Unit #145,
Dartmouth, NS. B3B 0M4

Phone: 902 468-7064

Toll Free: 1 888 625-4821

Fax: 902 468-3551



Follow Us!
@makita.ca

When **QUALITY & SERVICE** Counts
Choose Makita

makita.ca

Printed in Canada 2018

