

When QUALITY &  
SERVICE Counts  
Choose Makita  
[makita.ca](http://makita.ca)

 **OUTDOOR**  
POWER EQUIPMENT

**Makita**®



# 2019

OUTDOOR POWER EQUIPMENT

# CATALOGUE

POWER CUTTERS	2 - 3	POLE HEDGE TRIMMERS	18 - 19
ANGLE CUTTERS	4	POLE CHAINSAW	20
POWER-ASSISTED WHEELBARROWS	5	CULTIVATOR	20
CHAINSAWS	6 - 9	GRASS SHEARS	21
BRUSH CUTTERS	10	RECIPROCATING SAWS	22
LINE TRIMMERS	11 - 12	LOG HOME BUILDING TOOLS	23 - 25
LAWN MOWERS	13	GENERATORS	26 - 27
BLOWERS	13 - 15	TRASH & WATER PUMPS	28 - 29
HEDGE TRIMMERS	16 - 17	ACCESSORIES	30 - 37

WELCOME TO MAKITA'S LINE OF **OUTDOOR POWER EQUIPMENT** FEATURING SEVERAL POWER OPTIONS

## CORDLESS POWER

Dual-Port Rapid Charging System  
DC18RD

**INDUSTRY LEADING**  
Rapid Charge Time  
**6.0Ah**

with Charge Level Indicator 197424-0  
**6.0Ah BL1860B**

**5.0Ah BL1850B**  
with Charge Level Indicator 196675-2

**4.0Ah BL1840B**  
with Charge Level Indicator 196401-9

**3.0Ah BL1830B**  
with Charge Level Indicator 194205-3

**Compact BL1815N**  
196235-0

**Rapid Charging System DC18RC**

**BRUSHLESS**  
**TURBO BLOWER**  
DUB3622

**18V LITHIUM-ION**

### LONGER LIFE

- **Maintenance free operation** with no brushes to replace
- **Reduced friction** means less wear on gears and other internal parts for maximum operational performance
- **Longer battery run times** and overall life cycles

### LESS HEAT

- **Lower amperage draw** of brushless motors and minimal friction result in reduced heat buildup in tool and battery
- **Increased Motor Cooling** due to greater air volume around the motor
- Ideal for use during periods of prolonged operation, including manufacturing and production applications

### MORE RUN TIME

- Lower heat, friction and amperage draw extends battery run time per charge

### MORE WORK

- Brushless Motors offer increased speed, higher torque and maximum operational efficiency for greater productivity
- Electronic controllers allow for integration of **Impact Power Selection** and **Tek Screw Mode** features for precision fastening applications

**XPT**  
EXTREME PROTECTION TECHNOLOGY

XPT tools are designed to **prevent penetration of dust, debris, and liquids into the tool** during standard applications in outdoor or harsh environments



**DIRECT CONNECT SYSTEM**  
Tools with this symbol

use **ANY two**  
**18V Li-Ion Batteries**

directly without a battery converter

**X2**  
18V + 18V → 36V



# ELECTRIC POWER

Makita offers many outdoor power tools with electric motors.

Electric motors are an environmentally friendly alternative to fuel

based engines. Electric motor driven equipment can be stored in the off-season with little to no preparation.

Many of Makita's electric outdoor tools offer a soft start feature and current limiters to protect the motor from premature burnout, extending the life of your equipment.



# 4-STROKE POWER

**MM4**  
MAKITA MINI 4-STROKE ENGINE


Compared with conventional 4-stroke engines, Makita's

4-stroke engines produce approximately 20 to 30 % more power thanks to its high combustion efficiency and compact spark plug.

Additionally, by employing a unique lubrication system, it has obtained the smallest in class exterior physical dimensions among the 4-stroke engines available in the market today. And it is also lightest in class by using a magnesium alloy diecast for the clutch case.

**Patented unique lubrication**

**system enables use in multiple positions**

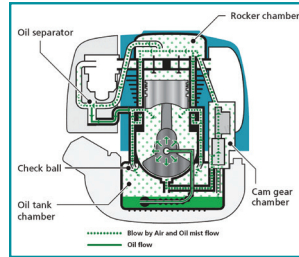

The patented oil lubrication system expands the use of the MM4 engines into product lines such as brush cutters and line trimmers where traditional 4-Stroke engines have difficulty operating on slopes and angles.

The natural pressure changes in the crankcase caused by the piston movement in the cylinder are harnessed to pump oil throughout the engine. Oil is pumped from a reservoir in the base of the engine through a network of one-way valves for reliable lubrication and long service life without the need to keep the engine level.

**New compact plug**

**Valve system**

**High-silicone aluminum alloy piston**

**Double element with filter and sponge**

**Oil separator**

**Needle bearing on both ends of connecting rod**

**Check ball**

**Hard chrome plating on cylinder**

**Sintered cam gear**

**Decompression system:**

The force required to pull the starter rope is drastically reduced by the **mechanical decompression system** that features our original centrifugal structure in the cam gear.

**All Makita MM4 engines feature:**

- Automatic decompression valve to reduce required start up force by 40% for easy starting
- No fuel / oil mixing for cleaner exhaust emissions and reduced fuel consumption
- Primer bulb and choke for easy starting
- Compliant with CARB tier 3, EPA phase 2, EU stage 2 emissions requirements which exceeds government clean air emission ratings
- Low noise levels for quiet operation
- Easy access to spark plug and air filter for fast service
- Lightweight design for operational comfort
- Diaphragm type carburetor for all position operation
- Electronic ignition system for reliable performance

# 2-STROKE POWER

• All Makita 2-stroke engines are compliant with CARB tier 3, EPA phase 2 and EU stage 2 government regulations.

• Select Makita 2-stroke engines feature a catalytic converter for cleaner emissions. Some models also include a Scavenging Losses Rejection (SLR) muffler system which recycles unburnt gas through the exhaust increasing operational efficiency and producing much cleaner emissions.

• Many of Makita's 2-stroke engines offer a decompression button for easy starting.

• All Makita 2-stroke engines require the use of synthetic engine oil with fuel stabilizer for long engine life.



# POWER CUTTERS

## 4-STROKE POWER

# MM4

MAKITA MINI 4-STROKE ENGINE

**2**  
YEAR  
WARRANTY

20 mm Arbor



14" cutting  
wheel

## 75.6cc Power Cutter

EK7651H

Shown with Optional Blade (T-02836)

**The FIRST 4-Stroke  
Power Cutter available  
on the market!**

Automatic  
decompression  
reduces required start  
up force by

**40%**

MM4 Premium  
4-Stroke Engine Oil  
(Part No. T-02484)



## ACCESSORIES



**14" Vacuum Brazed  
Diamond Rescue Wheel**

See page 31 for more details



Guide Trolley



10L (2.5 Gal)  
Pressurized  
Water Tank

EK7651H

## POWER CUTTER FEATURES & BENEFITS

• **Reduced Noise and Fuel Consumption** versus competitive 2-stroke models for maximum operator comfort and reduced operational costs

• **No Fuel Mixing** prevents damage due to improper fuel mixture and eliminates need to carry separate mixed fuel

• **Cleaner 4-Stroke Emissions** limits environmental impact and reduced carbon buildup in engine

SPECIFICATIONS	EK7651H
Displacement	4.6 cu.in (75.6cc)
Maximum Power	3.0 kW (4.1 HP)
Ignition System	Non-Contact, Magnet Type
Fuel Tank Capacity	1/3 Gal (1.1 L)
No Load Speed	9,100 RPM
Maximum Spindle Speed	4,300 RPM
Maximum Cutting Depth	4-13/16" (12.2 cm)
Dry Weight	28.4 lbs (12.9 kg)

## 2-STROKE POWER



• **NEW Scavenging Losses Rejection (SLR) muffler** recycles exhaust unburnt gas emissions for increased operational efficiency and cleaner emissions

• **Top mount decompression valve** reduces required start up force by **70%**

- Stratified scavenging system to comply with many exhaust emission regulations
- Rapid start pull force required to start the machine is drastically reduced with spring-assisted recoil starter

• **Advanced 5 stage air filtration system** for cleaner operation and enhanced engine life

SPECIFICATIONS	EK8100	EK7301	EK6101
Displacement	4.9 cu.in (81cc)	4.5 cu.in (73cc)	3.7 cu.in (60.7cc)
Maximum Power	4.2 kW (5.6 HP)	3.8 kW (5.1 HP)	3.2 kW (4.4 HP)
Fuel / Oil Mixture	50:1 Synthetic		
Ignition System	Electronic		
Fuel Tank Capacity	1/3 Gal (1.1 L)		1/6 Gal (0.7 L)
No Load Speed (Engine)	9,350 RPM	9,400 RPM	9,850 RPM
Maximum Spindle Speed	3,820 RPM	4,300 RPM	4,400 RPM
Maximum Cutting Depth	5-3/4" (14.7 cm)	4-13/16" (12.2 cm)	5-1/8" (13 cm)
Dry Weight	23.4 lbs (10.6 kg)	22.5 lbs (10.2 kg)	19.6 lbs (8.9 kg)

## DIAMOND BLADES

Premium Professional Performance



### 14" 3D PREMIUM Diamond Blade

Features 3D Diamond Grid Technology incorporating even placement of diamond content throughout the segment



### 14" Metal Cutting Diamond Blade

Ideal for cutting angle iron, rebar, deck plating, steel studs, pipe and more!

See page 30 for more details

## PREMIUM MM4 4-STROKE ENGINE OIL

**0.2 L (200 ml) size ideal for use with MM4 Power Cutters and Backpack Blowers**

\*For distributor: (T-02490) (12 Bottles / Case)

**0.08 L (80 ml) size ideal for use with MM4 Line Trimmers, Brush Cutters, Pole Chain Saw, Hand Held Blowers and 1" Water Pump (195826-4) (single bottle)**

\*For distributor: (195826-4-48) (48 Bottles / Case)



## All 2-stroke Makita power cutters require synthetic 2-cycle engine oil with fuel stabilizer

### For 3.8 L / 1 Gallon Mix

(T-00745C) synthetic 2-Stroke oil

\*For distributor:  
(T-00745C-48) (48 Bottles / Case)

### For 9.5 L / 2.5 Gallon Mix

(T-00739C) synthetic 2-Stroke oil

\*For distributor:  
(T-00739C-48) (48 Bottles / Case)



## ELECTRIC POWER

SUPER JOINT SYSTEM™

# SJS

"SJS" technology prevents kickback  
if blade jams protecting both the  
operator and tool

## Angle Cutters

Used To Cut Steel, Concrete And  
Masonry Materials With A Dry Cutting  
Diamond Blade

12" Blade Diameter

4112H

4114

14" Blade Diameter

## DIAMOND BLADES

Premium Professional Performance



### 14" OPTIMUM™ DIAMOND BLADE Turbo Rim

- Granite, Ceramic & Stone
- 5,400 RPM
- Material Type: Hard
- For 14" Angle Cutter 4114



### 12" OPTIMUM™ DIAMOND BLADE Segmented Rim

- Concrete & Asphalt
- 6,300 RPM
- Material Type: Medium & Soft
- For 12" Angle Cutter 4112H

See page 30 for more details

4114 / 4112H

## ANGLE CUTTER FEATURES & BENEFITS

- **Guide Wheels** on the tool guard ensure smooth tool travel over surface material
- **Rubber Shield** protects the operators hand and motor from debris
- **Lock-on Button** for continuous operation
- **Ball Bearing Construction** for longer tool life
- **Integrated Nozzle** can be connected to vacuum system for clean operation

SPECIFICATIONS	4114	4112H
Blade Diameter	14" (35.5 cm)	12" (30.5 cm)
Arbor	1" (2.5 cm)	
Maximum Cutting Depth	5" (12.5 cm)	3-15/16" (10 cm)
No Load Speed	3,800 RPM	5,000 RPM
AMPS (120V)	15.0 A	
Overall Length	26-1/2" (67.3 cm)	25-1/2" (64.8 cm)
Net Weight	22.7 lbs (10.3 kg)	25.1 lbs (11.4 kg)



# CORDLESS POWER

## 18Vx2 POWER-ASSISTED WHEELBARROWS

**Battery Box Holds Two Selectable 18V Batteries**  
**Operates using (1) 18V Battery at a time**



Wheelbarrow with **FLATBED TRAY**  
Removable Sides / DCU180ZX1



Wheelbarrow with **BUCKET**  
Dumping Feature / DCU180ZX2



**Brake Lever with Locking Mechanism**  
prevents accidental start on a slope (Front Wheel)



Variable  
2-Speed,  
Reversible

Maximum  
Climbing Capacity

**12°**

Becomes a  
traditional  
Wheelbarrow  
when rear  
wheels are  
replaced  
with legs!

**XPT**  
EXTENDED POWER TECHNOLOGY

**18V**  
LITHIUM-ION

**Detachable  
Rear Wheels!**

Batteries & Charger  
Sold Separately



Maximum Loading Capacity

**287 Lbs**

Move heavy loads with NO BACK PAIN



### Power-Assisted Wheelbarrows are a convenient solution for transporting material on job sites

- Delivers up to 60 minutes of run time under load using one 18V LXT (6.0 Ah) BL1860 battery
- Holds (2) 18V LXT Lithium-Ion batteries but operates using (1) 18V battery at a time; utilizes second battery when needed
- 2-speed with maximum speed up to 2.5 MPH on a 12° incline
- Maximum load capacity up to 287 lbs (130 kg)
- Rear wheel spacing is adjustable from 19" to 30" to accommodate the work environment

### Wheelbarrow with **Flatbed Tray** DCU180ZX1

Tool only. Battery & charger  
sold separately.



### Wheelbarrow with **Bucket** DCU180ZX2

Tool only. Battery & charger  
sold separately.

18V x2 LXT power-assisted wheelbarrow Accessories	
FLATBED TRAY 199116-7	BUCKET 198494-2
Side rails install in up or down position; large knob for easy adjustment	Heavy duty steel based bucket for tough workloads

SPECIFICATIONS	DCU180ZX1	DCU180ZX2
Battery Capacities	18V Li-Ion	
Maximum Speed Forward, High / Low	0 - 3.5 km/h / 0 - 1.5 km/h	
Maximum Speed Reverse	0 - 1.0 km/h	
Minimum Turning Radius Outer diameter when turning with front wheel as axis	110 cm	
Maximum Climbing Capacity	12°	
Maximum Load Capacity	287 lbs (130 kg)	
Overall Length	61-1/2" (15.6 cm)	51-1/2" (13.1 cm)
Net Weight	97.5 lbs (44.2 kg)	86 lbs (39 kg)

# CHAINSaws

## 2-STROKE POWER



**78.5cc Chainsaw**  
EA7900PRFE

**72.6cc Chainsaw**  
EA7300PRFE

**SLR + Decompression Valve + Winter mode**

- Easy Remove Air Filter and Spark Plug Cover for quick maintenance access
- Steel Spring / Advanced Vibration Dampening System is engineered for reducing vibration
- Dual Mount, Aggressive Large Metal Spike Bars for Safety and Hinge Action Cutting

**60.7cc Chainsaw**  
EA6100PRGE

**SAS + Easy start + Winter mode**

- Heavy Duty Cartridge Filter System designed for Extended Filter Life and Less Maintenance
- Steel Spring / Advanced Vibration Dampening System is engineered for reducing vibration
- Aggressive Large Metal Spike Bar for Safety and Hinge Action Cutting

**55.6cc Chainsaw**  
EA5600FREE

**SAS + Easy start + Winter mode**

- Heavy Duty Cartridge Filter System designed for Extended Filter Life and Less Maintenance
- Steel Spring / Advanced Vibration Dampening System is engineered for reducing vibration
- Bar & Chain Fasteners remain fixed to cover when loosened

**50cc Chainsaws**  
DCS5121REJ  
EA5000PREL

**SLR + Easy start + Winter mode**

- Easy Remove Air Filter and Spark Plug Cover for quick maintenance access
- Steel Spring / Advanced Vibration Dampening System is engineered for reducing vibration
- Dual Mount, Aggressive Large Metal Spike Bars for Safety and Hinge Action Cutting

## ACCESSORIES



**Chainsaw Files (12 Pack)**



SPECIFICATIONS	EA7900PRFE	EA7300PRFE	EA6100PRGE	EA5600FREE	DCS5121REJ	EA5000PREL
Displacement	78.5cc (4.8 cu.in.)	72.6cc (4.4 cu.in.)	60.7cc (3.7 cu.in.)	55.6cc (3.4 cu.in.)	50cc (3.1 cu.in.)	
Chain Pitch / Gauge	3/8" / .058"				.325" / .058"	
Maximum Engine Speed	12,800 RPM		13,800 RPM			
Power Rating	4.4 kW / 5.7 HP	4.0 kW / 5.4 HP	3.4 kW / 4.5 HP	3.0 kW / 3.9 HP	2.5 kW / 3.3 HP	2.8 kW / 3.9 HP
Fuel Tank Capacity	750 ml		800 ml	570 ml	470 ml	
Chain Oil Tank Capacity	420 ml		480 ml	320 ml	269 ml	270 ml
Fuel / Oil Mixture	50:1 Synthetic					
Net Weight Dry Without Bar And Chain	14.7 lbs (6.7 kg)	13.8 lbs (6.3 kg)	13.2 lbs (6.0 kg)	12.8 lbs (5.8 kg)	12.1 lbs (5.4 kg)	11.9 lbs (5.4 kg)

## 2-STROKE POWER



All Makita 2-stroke engines require the use of **Synthetic Engine Oil with Fuel Stabilizer** for long engine life



**42.4cc Chainsaw**  
**EA4300FREC**

**Catalytic converter muffler + Easy start + Winter mode**

- Easy Remove Air Filter and Spark Plug Cover for quick maintenance access
- Aggressive Large Metal Spike Bar for Safety and Hinge Action Cutting
- Fuel Primer Bulb for Improved and Quicker Cold Starts



**35.2cc Chainsaw**  
**EA3601FRDB**

**SAS + Easy start + Winter mode**

- Stratified Air Scavenging engine for lower emissions and improved fuel efficiency
- "Tool-less" chain tensioning for quick and convenient chain adjustment
- Touch & Stop single lever control shuts off engine with just a touch

**Intelligent ignition coil** controls stable idling, increases output power, protects against engine overrun and enables easier restarting

**Easy start / equipped with a spring assisted recoil starter** for 30% less pulling force and a low RPM ignition coil providing faster, easier starting



**35cc Chainsaw**  
**EA3501SRDB**



**32cc Chainsaw**  
**EA3201SRDB**

- Easy Remove Air Filter and Spark Plug Cover for quick maintenance access
- Steel Spring / Advanced Vibration Dampening System is engineered for reducing vibration transfer to the operator
- Aggressive Large Metal Spike Bar for Safety and Hinge Action Cutting
- Fuel Primer Bulb for Improved and Quicker Cold Starts
- Aggressive Large Metal Spike Bar for Safety and Hinge Action Cutting
- Half Throttle-lock start position with Easy Start for Reduced Start-Up Force
- External Access Holes allow easy Carburetor Adjustment

## ACCESSORIES



**Chainsaw Chaps**

**Safety Pants**



**Chainsaw Files Sets**

**Chainsaw Case**

SPECIFICATIONS	EA4300FREC	EA3601FRDB	EA3501SRDB	EA3201SRDB
Displacement	42.4cc (2.6 cu.in.)	60.7cc (3.7 cu.in.)	35cc (2.1 cu.in.)	32cc (1.95 cu.in.)
Chain Pitch / Gauge	.325" / .050"		3/8" / .050"	
Maximum Engine Speed	13,500 RPM		13,100 RPM	12,800 RPM
Power Rating	2.1kW / 2.9 HP	1.7 kW / 2.4 HP	1.7 kW / 2.3 HP	1.35 kW / 1.8 HP
Fuel Tank Capacity	480 ml	310 ml	400 ml	
Chain Oil Tank Capacity	280 ml	260 ml	290 ml	280 ml
Fuel / Oil Mixture	50:1 Synthetic			
Net Weight Dry Without Bar And Chain	10.8 lbs (4.9 kg)	9.3 lbs (4.2 kg)	9.9 lbs (4.5 kg)	9.4 lbs (4.2 kg)

**New HIGH VISIBILITY SAFETY COLOUR!**



# CHAINSAWS

CORDLESS POWER

BRUSHLESS

# X2

18V x 18V → 36V

BRUSHLESS

## 18Vx2 Chainsaws

Tools only. Battery & charger sold separately.

16" Bar

DUC400Z

Toolless Chain  
Tension Adjustment

DUC405Z

Captive Bar  
Nuts For Chain  
Tensioning

Brushless Outer Motor + XPT  
+ 3 Year Limited Warranty

# XPT

EXTREME PROTECTION TECHNOLOGY

14" Bar

DUC353Z

Toolless Chain  
Tension Adjustment

DUC355Z

Captive Bar Nuts  
For Chain Tensioning

Cordless Chainsaw with specialized battery positioning for optimum balance and control



Unique battery positioning for optimum performance



Brushless outer motor direct drive system

DUC400Z / DUC405Z / DUC353Z / DUC355Z

## 18Vx2 CHAINSAW FEATURES & BENEFITS

- **Fast, Variable Speed (3,940 Feet Per Minute)**  
Equivalent to a 30cc Gasoline Chainsaw
- **Specialized 18Vx2 Battery Positioning** is the Makita Industry **GAME CHANGER** within the Cordless Product line offering Premium Balance, Control and Cutting Performance
- **Makita Built Outer Rotor Brushless Motor Direct Drive System** for High Power & Speed equivalent to a 30cc Gasoline Chainsaw

SPECIFICATIONS	DUC400Z	DUC405Z	DUC353Z	DUC355Z
Battery Capacities	Two 18V Li-Ion			
Guide Bar Length	16" (40 cm)		14" (35 cm)	
Chain Pitch / Gauge	3/8" / 0.043"			
Chain Speed	0-3,940 FPM (1,200 m/min)			
Overall Length	32-1/4" (81.8 cm)	31-1/2" (80 cm)	30-1/2" (77.3 cm)	30" (76.2 cm)
Net Weight	9.3 lbs (4.2 kg)	9.0 lbs (4.1 kg)	8.9 lbs (4.0 kg)	

## CORDLESS POWER

## ELECTRIC POWER

**XPT**  
EXTREME PROTECTION TECHNOLOGY

**X2**  
18V • 36V

**XPT / eXtreme  
Protection  
Technology**



**18Vx2 Chainsaw  
DUC302Z**

Tool only. Battery & charger sold separately.

- Battery capacity warning light indicates ideal time to recharge battery
- Lock-off button prevents accidental startup
- Inertia chain brake provides maximum operator safety if kickback occurs
- Tool-less chain tension adjustment for quick and easy adjustment on the jobsite
- Automatic chain oiler
- Metal lanyard hook enables quick attachment to lanyard during climbing or bucket operations

**BRUSHLESS**  
**XPT**  
EXTREME PROTECTION TECHNOLOGY

**18V**  
LITHIUM-ION



**18V Top Handle  
Chainsaw  
DUC254Z**

Tool only. Battery & charger sold separately.

- Variable speed control by trigger
- Soft start for motor protection
- Electric chain brake
- Kickback brake
- Chain oil adjustment
- Oil Capacity Display window
- Brushless motor
- Compact & Lightweight.
- Captive nuts: prevent loss of nut when removing sprocket cover to replace guide bar or saw chain
- Hanging hook

**18V**  
LITHIUM-ION

**18V Compact  
design**



**18V Chainsaw  
DUC122Z**

Tool only. Battery & charger sold separately.  
(Also available with Battery and Charger  
DUC122SF. See makita.ca)

- Compact design enables maximum operator maneuverability and versatility
- Hand guard protects operators hand during operation
- Lock-off button prevents accidental startup
- Electric brake stops chain within 0.5 seconds for added safety
- Tip guard prevents kickback for maximum operator safety
- Tool-less chain tension adjustment for quick and easy adjustment on the jobsite

**16" Bar  
Chainsaw  
UC4051A**



UC4051A

**14" Bar  
Chainsaw  
UC3530A**

**Soft start +  
Electronic current limiter  
+ Electric brake**

- Tool-less chain tension adjustment for quick and easy adjustment on the jobsite
- Soft start feature gradually increases speed to eliminate start up shock
- Electronic current limiter prevents motor burnout due to overloading
- Electric brake for increased operator safety
- Automatic chain oiler maintains constant oil delivery regardless of temperature or oil viscosity
- Increased oil tank capacity enables longer operating time between refills

**Cordless Chainsaw  
Extension Handle  
(for model DUC122Z)  
195595-7**



**6-1/2' – 9-1/2'  
of added reach!**

**Ideal for pruning and limbing in  
hard to reach trees**

*Cordless Chain  
Saw not included*

## ACCESSORIES



SPECIFICATIONS	DUC302Z	DUC254Z	DUC122Z
Battery Capacities	Two 18V Li-Ion	18V Li-Ion	
Guide Bar Length	12" (30 cm)	10" (25 cm)	4-1/2" (11.5 cm)
Chain Pitch / Gauge	3/8" / 0.043"		1/4" / .050"
Chain Speed	1,650 FPM (500 m / min)	4,720 FPM (1,440 m / min)	980 FPM (300 m / min)
Overall Length	23-5/8" (60 cm)	19" (48 cm)	16-5/8" (42.2 cm)
Net Weight	7.7 lbs (3.5 kg)	5.8 lbs (2.6 kg)	4.2 lbs (1.9 kg)

SPECIFICATIONS	UC4051A	UC3530A
Chain Pitch / Gauge	3/8" / .050"	
Chain Speed	2,900 FPM	
Chain Oil Tank Capacity	200 ml	
AMPS [120V]	14.5 A	
Overall Length	19-7/8" (50.5 cm)	
Net Weight	12.3 lbs (5.6 kg)	12.1 lbs (5.5 kg)

# BRUSH CUTTERS

See pages 35-37 for more  
BRUSH CUTTER ACCESSORIES

## 4-STROKE / 2-STROKE / CORDLESS POWER

Bump & Feed  
Trimmer Head  
Standard Equipment  
Part No. B-05131



10" Cutting Width

**33.5cc  
Brush Cutter  
& Line  
Trimmer**  
EBH341U

9" Cutting Width

**24.5cc  
Brush  
Cutter**  
EBH253U

- Patented Lubrication System enables Makita 4-stroke brush cutters & line trimmers to be used on angles
- Equipped with Swivel System U-handle for maximum operator comfort

### Brush Cutters Line Trimmers

25.7cc 2-Stroke EM2600U

**NEW!** 25.4cc 4-Stroke EM2650H



9" Cutting Width



**25.4cc  
Split Shaft  
Engine Unit**  
EX2650LH

Patented lubrication system enables Makita 4-Stroke Line Trimmers to be used on any angle and slope

**16-1/2" Cutting Width**  
with EM400MP



**Split Shaft  
Unit & Attachments  
Tool Bag**  
195638-5

**18Vx2  
Split Shaft  
Power Unit**  
DUX60Z

Tool only. Battery & charger sold separately.



SPECIFICATIONS	DUX60Z
Battery Capacities	Two 18V Li-Ion
No Load Speed	0 - 9,700 RPM / 0 - 8,200 RPM 0 - 5,700 RPM
Overall Length	39-3/4" (101 cm)
Net Weight	9.8 lbs (4.4 kg)

Split shaft attachments use a **quick release** accessory mounting system!

**Straight Shaft Line Trimmer**  
Includes Parts for Brush Cutter\*  
EM401MP

**Straight Shaft Line Trimmer**  
EM400MP (Large Guard)  
EM405MP (Small Guard)

**Curved Shaft Line Trimmer**  
ER400MP

**Chainsaw**  
EY401MP

**Cultivator**  
KR401MP

**Edger**  
EE400MP

**Extension Shaft**  
LE400MP

**Angle Hedge Trimmer**  
EN401MP

**Straight Hedge Trimmer**  
EN410MP

**Ground & Hedge Trimmer**  
EN420MP

\*Blade Sold Separately

See page 35 for more Split Shaft Attachment details

## SPLIT SHAFT UNIT ATTACHMENTS

SPECIFICATIONS	EBH341U	EBH253U	EM2650UH	EM2600U	EX2650LH SPLIT SHAFT
Cutting Width	10" (25.4 cm) With Blade 16" (40.6 cm) With Line Head	9" (23 cm)			Varies with attachment
Displacement	33.5cc	24.5cc	25.4cc	25.7cc	25.4cc
Maximum Engine Power	1.07 Kw / 1.44 HP	0.71 Kw / 0.97 HP	0.77 Kw / 1.1 HP	0.83 Kw / 1.15 HP	N/A
Fuel Tank Capacity	0.65 L	0.5 L	0.6 L		0.6 L
Oil Tank Capacity	0.1 L	0.08 L		Fuel Mixture 50:1 Synthetic	0.08 L
Overall Length	71-1/4" (181 cm)	69-3/4" (177 cm)	69-1/2" (177 cm)	69-3/4" (177 cm)	38-3/8" (97.5 cm)
Dry Weight	15.7 lbs (7.1 kg)	13.0 lbs (5.9 kg)	12.1 lbs (5.5 kg)	11.8 lbs (5.0 kg)	10.0 lbs (4.6 kg)

## 4-STROKE POWER

## 2-STROKE POWER

### MM4 MAKITA MINI 4-STROKE ENGINE

- Patented lubrication system enables Makita 4-stroke brush cutters & line trimmers to be used on angles and slopes
- Anti-vibration system for fatigue free use
- Smooth throttle control and soft grip for comfortable operation
- Durable nylon string trimmer head



16" Cutting Width

**33.5cc  
Line  
Trimmer**  
EBH341L

16" Cutting Width

**24.5cc  
Line  
Trimmer**  
EBH253L



16-1/4" Cutting Width

**24.5cc  
Curved  
Shaft Line  
Trimmer**  
ER2550LH



**25.7cc  
Line Trimmer**  
EM2600L

- Multi-positional engine
- Environment-friendly 2-stroke engine with catalytic exhaust
- Wide trigger control and soft grip for comfortable operation



17" Cutting Width



15-3/4" Cutting Width

**25.7cc  
Curved  
Shaft Line  
Trimmer**  
ER2600L

Compliant with EPA phase 2, EU stage 2 exhaust emissions regulations

- Multi-positional engine
- Environment-friendly 2-stroke engine with catalytic exhaust
- Equipped with Easy Start system for faster, easier starting

## ACCESSORIES



Line Trimmer Guard



Line Trimmer Head



197678-9

### 4-Stroke Engine Maintenance Kit

for Line Trimmers  
& Brush Cutters



197437-1

**30  
Hour**  
Lubricating  
Maintenance Grease

for Line Trimmers & Brush Cutters

SPECIFICATIONS	EBH341L	EBH253L	ER2550LH	EM2600L	ER2600L
Cutting Width	16" (40.6 cm)	16" (40.6 cm)	16-1/4" (41.2 cm)	17" (43 cm)	15-3/4" (40 cm)
Displacement	33.5cc	24.5cc		25.7cc	
Maximum Engine Power	1.07 Kw / 1.44 HP	0.71 Kw / 0.97 HP		0.83 Kw / 1.2 HP	
Fuel Tank Capacity	0.65 L	0.5 L		0.6 L	
Oil Tank Capacity	0.1 L	0.08 L		Fuel / Oil Mixture 50:1	
Overall Length	71-1/4" (181 cm)	69-3/4" (177 cm)	64" (162.3 cm)	69-3/4" (177 cm)	64-3/4" (165 cm)
Dry Weight	14.8 lbs (6.7 kg)	11.5 lbs (5.2 kg)	10.8 lbs (4.9 kg)	10.8 lbs (4.9 kg)	9.5 lbs (4.3 kg)

# LINE TRIMMERS

See pages 36-37 for more  
LINE TRIMMER ACCESSORIES

## CORDLESS POWER

**BRUSHLESS**  
**X2**  
18Vx2 Line  
Trimmer  
DUR364LZ

Tool only. Battery & charger sold separately.

**XPT**  
**BRUSHLESS**  
13-3/4" Cutting Width

**18V LITHIUM-ION**  
18V Line  
Trimmer  
DUR187LZ

Tool only. Battery & charger sold separately.

**XPT**  
**ADT**  
**BRUSHLESS**  
11-3/4" Cutting Width

**18V LITHIUM-ION**  
18V Line  
Trimmer  
DUR189LZ


Tool only. Battery & charger sold separately.

**XPT**  
**ADT**  
**BRUSHLESS**  
11-3/4" Cutting Width



Trimmer Head rotates 180° to enable easy edge trimming

10-1/4" Cutting Width



**18V LITHIUM-ION**  
18V Line  
Trimmer  
DUR181Z

Tool only. Battery & charger sold separately. (Also available with Battery and Charger DUR181SF. See makita.ca)

**12V MAX CXT**  
Nylon Blade  
Trimmer  
UR100DZX

Tool only. Battery & charger sold separately.

9" Cutting Width

**XPT**  
EXTREME PROTECTION TECHNOLOGY

**12V LITHIUM-ION**  
**CXT**

**18V LITHIUM-ION**  
18V  
Split Shaft  
Line Trimmer  
DUR188LZ

Tool only. Battery & charger sold separately.

**XPT**  
**BRUSHLESS**  
11-3/4" Cutting Width

**BRUSHLESS**  
**X2**  
18Vx2 Brush Cutter  
DUR365UZ

Tool only. Battery & charger sold separately.

**XPT**  
**BRUSHLESS**  
13-3/4" Cutting Width

Powerful trimming for where low noise is a concern!

Brushless motor is located on the trimmer head end to provide ultimate torque for trimming

## ACCESSORIES

Shoulder  
Strap



Chest Harness

Trimmer Line 15 m  
(Twist Line)  
Replacement Trimmer  
Line ideal for Cordless  
Line Trimmers



197472-9

Construction  
Series

Demolition  
Series



Work Gloves are available in medium, large and extra-large sizes

SPECIFICATIONS	DUR364LZ	DUR365UZ	DUR188LZ	DUR189LZ	DUR187LZ	DUR181Z	UR100DZX
Battery Capacities	Two 18V Li-Ion		18V Li-Ion				12V Li-Ion
Cutting Width	13-3/4" (35 cm)		11-3/4" (29.8 cm)			9" (23 cm)	
No Load Speed	High: 6,500 RPM Low: 5,000 RPM	3,500 RPM 5,300 RPM 6,500 RPM	4,000 RPM / 5,000 RPM / 6,000 RPM			7,800 RPM	10,000 RPM
Overall Length	69" (175 cm)		70-1/2" (179 cm)	63-1/2" (161 cm)	70-1/2" (179 cm)	56-1/2" (143 cm)	46-3/4" (118 cm)
Net Weight	7.3 lbs (3.3 kg)	8.9 lbs (4.0 kg)	6.7 lbs (3.0 kg)	5.8 lbs (2.6 kg)	6.0 lbs (2.8 kg)	5.5 lbs (2.5 kg)	4.3 lbs (1.7 kg)

# LAWN MOWER / BLOWERS

## CORDLESS POWER

### 18Vx2 17" Lawn Mower DLM431Z

Tool only. Battery & charger sold separately.

17" Cutting Width



**NEW!** Also available with Batteries and Charger DLM431PTZ. See makita.ca

- Perfect for lawns up to 10,000 square feet (950 sq meters)
- Single lever with 13 setting cutting height adjustment - variable from 20 - 75 mm (13/16 inch - 3 inches)
- Ball bearing wheels for less effort required while mowing
- Folding handle for compact storage
- Lawn Mower can be used with or without Grass Catcher Bag

### 18Vx2 15" Lawn Mower DLM380Z

Tool only. Battery & charger sold separately.

15" Cutting Width



- Perfect for lawns up to 6,000 square feet (550 sq meters)
- Single lever with 6 setting cutting height adjustment - variable from 20 - 75 mm (1 inch - 3 inches)
- Folding handle for compact storage
- Dual battery charge level indicators
- Lawn Mower can be used with or without Grass Catcher Bag

SPECIFICATIONS	DLM431Z	DLM380Z
Battery Capacities	Two 18V Li-Ion	
Cutting Width	17" (43 cm)	15" (38 cm)
Range of Height	13/16" - 2-15/16" (2 - 7.5 cm)	1" - 2-15/16" (2.5 - 7.5 cm)
Step	13 Steps	6 Steps
Grass Box Capacity	50 L	40 L
No Load Speed	3,600 RPM	3,700 RPM
Overall Length	58-3/4" (149 cm)	53-1/2" (149 cm)
Net Weight	38.2 lbs (17.3 kg)	31.7 lbs (14.4 kg)

**Our most  
powerful  
cordless  
blower  
yet!**



### 18Vx2 Turbo Blower DUB362Z

Tool only. Battery & charger sold separately.



**BRUSHLESS**



**Amazing  
120 MPH and  
473 CFM operation**

- 6-stage air volume/velocity settings by dial with variable speed control by trigger
- The trigger also has a lock on function, with button operable from either side of handle
- 3-stage telescopic long nozzle with adjustment range of 100 mm (4")
- Dual LED charge level indicators
- Best grip to frame angle provides optimum nozzle to ground angle for efficient sweeping operation

SPECIFICATIONS	DUB362Z
Battery Capacities	Two 18V Li-Ion
Maximum Air Volume	473 CFM (13.4 m³/min)
Maximum Air Speed	120 MPH (54 m/sec)
No Load Speed	22,000 RPM
Overall Length	32-3/4", 34-3/4", 36-5/8" (83 cm, 88 cm, 93 cm)
Net Weight	6.0 lbs (2.7 kg)

## CORDLESS POWER



### X2 18Vx2 Blower DUB361Z

Tool only. Battery & charger sold separately.

**XPT**  
EXTREME PROTECTION TECHNOLOGY

**Push button air volume selection (low / high settings)**

- eXtreme Protection Technology (XPT) offers maximum protection against dust, debris and liquids for
- Optimal performance in extreme conditions
- Battery capacity warning light indicates ideal time to recharge battery
- Low noise level suitable for use in residential areas and public spaces
- Long blowing nozzle with curved tip for optimal blowing performance
- Shoulder belt for operator convenience

### 18V Blower Sweeper DUB183Z

Tool only. Battery & charger sold separately.  
(Also available with Battery and Charger DUB183SF. See makita.ca)



**18V**  
LITHIUM-ION

**Unique extended nozzle design for optimum operation directs air flow angle for blowing & sweeping**

### 18V Blower/Vacuum DUB182Z



**18V**  
LITHIUM-ION

Optional Long Nozzle with Curved End sold separately (Part No. TP00000199)

Tool only. Battery & charger sold separately.

- Low / Medium / High Air Volume Settings with Variable Speed Control within Each Setting
- Ergonomic Soft Rubber Grip design for Vibration Absorption and Comfortable Operation
- Anti-static design to prevent buildup of Static Electricity
- Converts to Vacuum quickly and easily
- Light Weight Design for Reduced Operator Fatigue

## LITHIUM-ION BATTERY CHARGERS



### 4-Port Multi Charger - DC18SF

- Charges two 18V Li-Ion batteries at once
- Charges three or four 18V (3.0 Ah) Li-Ion batteries in 120 minutes



### Dual Port Rapid Charger - DC18RD

Dual port design enables two batteries to be charge simultaneously



### Rapid Charger DC18RC

Charges 18V (3.0 Ah) Li-Ion battery in 22 minutes



### Standard Charger - DC18SD

Charges 18V (3.0 Ah) Li-Ion battery in 60 minutes



### Automotive Charger - DC18SE

Plugs into 12V automotive outlets to enable charging on the go

SPECIFICATIONS	DUB361Z	DUB182Z	DUB183Z
Battery Capacities	Two 18V Li-Ion	18V Li-Ion	
Maximum Air Volume	Low: 92 CFM (2.6 m <sup>3</sup> / min) High: 155 CFM (4.4 m <sup>3</sup> / min)	92 CFM (2.6 m <sup>3</sup> /min)	
Maximum Air Speed	Low: 128 MPH (57 m / sec) High: 208 MPH (93 m / sec)	179 MPH (80 m / sec)	116 MPH (52 m / sec)
No Load Speed	Low: 10,000 RPM High: 17,000 RPM	0 - 18,000 RPM	
Overall Length	35-5/8" (90.5 cm)	20-3/4" (53.5 cm)	33-1/4" (84.5 cm)
Net Weight	4.2 lbs (1.9 kg)	2.9 lbs (1.3 kg)	

## 4-STROKE POWER

- Exceeds government clean air emission ratings
- **MM4 Low Noise, Low Emission** engine
- **Auto Decompression** for easy starting
- Easy access to spark plug and air filter
- Lightweight design



**MM4**  
MAKITA MINI 4-STROKE ENGINE

**205 MPH**  
Air Speed  
**75.6cc**  
Backpack Blower  
EB7660TH

**218 MPH**  
Air Speed  
**52.5cc**  
Backpack Blower  
EB5300TH

**145 MPH Air Speed**  
**24.5cc Blower**  
BHX2500CA

**190 MPH Air Speed**  
**75.6cc**  
Backpack Mist Blower  
PM7650H

Ideal for application of insecticides, herbicides, fungicides, and liquid fertilizers

(Also available with Vacuum Kit BHX2500CAV. See [makita.ca](http://makita.ca))

**Transform the**  
**BHX2500CA**  
**24.5cc**  
**Blower into a**  
**high-powered**  
**vacuum!**

**Vacuum Assembly**  
197234-5



**Safety Glasses**

SPECIFICATIONS	EB7660TH	EB5300TH	PM7650H	BHX2500CA
Displacement	75.6cc	52.5cc	75.6cc	24.5cc
Maximum Air Speed	205 MPH	218 MPH	190 MPH	145 MPH
Maximum Air Volume [End Of Nozzle]	705 CFM	512 CFM	497 CFM	356 CFM
Power Rating	3.0 kW / 4.1 HP	1.8 kW / 2.5 HP	2.7 kW / 3.6 HP	0.81 kW / 1.1 HP
Tank Capacity	1.9 L	1.8 L	1.8 L	520 ml
Overall Length	13-1/8" (33.2 cm)	12-5/8" (32 cm)	16-1/2" (42 cm)	13-3/4" (35 cm)
Dry Weight	24.1 lbs (10.9 kg)	19.7 lbs (8.9 kg)	30.7 lbs (13.9 kg)	9.9 lbs (4.5 kg)

# HEDGE TRIMMERS

## 2-STROKE POWER

- **3 Edge Tooth Design** and High **Anti-Abrasion Coated Surface** for Stain Free Long Lasting Operation
- **Double Sided Stainless Steel Blades** for Extended Life, Clean Trimming and Cutting on Both Sides of Blade
- **Extended 50 Hour Long Life Gear Case Lubrication System**
- Anti-vibration design for Less Operator Fatigue

### 22.2cc Hedge Trimmers



28-3/4" Cutting Length

EH7500W



23-1/8" Cutting Length

EH6000W



19" Cutting Length

EH5000W

### 5 Position Handle



5 Position adjustable rear handle for vertical or angle trimming

SPECIFICATIONS	EH7500W	EH6000W	EH5000W
Displacement	22.2cc		
Maximum Engine Power	0.68 kW / 0.91 HP		
Cutting Length	28-3/4" (72.8 cm)	23-1/8" (58.8 cm)	19" (48.3 cm)
Fuel Tank Capacity	400 ml		
Overall Length	49-1/2" (125 cm)	44" (111 cm)	40" (101 cm)
Net Weight	11.4 lbs (5.2 kg)	11.0 lbs (5.0 kg)	10.5 lbs (4.8 kg)

## ELECTRIC POWER

**Electric  
Brake**

25-1/2" Cutting Length

**Hedge  
Trimmer**  
UH6570

**Electric  
Brake**

21-5/8" Cutting Length

**Hedge Trimmer**  
UH5570

- **Ergonomic Soft Rubber Grip** for vibration absorption and comfortable operation
- **2-Hand Operation Switch** for maximum safety
- **Tip Guard** to prevent kick-back while trimming
- **Coated Blades** for improved durability
- **Built in Safety Clutch**
- **Easy blade replacement**

SPECIFICATIONS	UH6570	UH5570
Cutting Length	25-1/2" (65 cm)	21-5/8" (55 cm)
Strokes Per Minute	1,600 SPM	
AMPS (120V)	4.8 A	
Overall Length	40-1/2" (103.1 cm)	
Net Weight	3.8 lbs (8.4 kg)	3.7 lbs (8.2 kg)



## CORDLESS POWER

**18Vx2  
Hedge  
Trimmer**  
DUH651Z

Tools only. Battery & charger sold separately.

25-1/2" Cutting Width



**Reduced noise and emissions versus competitive gas models**

- Accepts 2 x 18V Li-Ion batteries without a battery converter for use with existing 18V Li-Ion battery platform
- eXtreme Protection Technology (XPT) offers maximum protection against dust, debris and liquids for optimal performance in extreme conditions

**NEW!**

**18V  
LITHIUM-ION**

**XPT  
BRUSHLESS**

**18V Hedge  
Trimmer**  
DUH602Z

Tools only. Battery & charger sold separately.

- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Battery capacity warning light indicates approximate remaining battery power
- 5 position rotating rear handle

**18V  
LITHIUM-ION**

22" Cutting Width

Tool only. Battery & charger sold separately.  
(Also available with Battery and Charger DUH523SF. See makita.ca)

**18V Hedge Trimmer**  
DUH523Z

**12V Hedge  
Trimmer**  
UH201DZ

Tool only. Battery & charger sold separately.

**CXT 12V  
LITHIUM-ION**

7-7/8" Cutting Width

**Optional Grass  
Shear Attachment**

Shear Blade Assembly 195176-7  
Blade Cover 452055-5  
Grass Catcher 457426-1

**Chip  
Receiver Set**  
Standard Equipment  
Part No.  
198402-3

SPECIFICATIONS	DUH651Z	DUH602Z	DUH523Z	UH201DZ
Battery Capacities	Two 18V Li-Ion	18V Li-Ion		12V MAX CXT Li-Ion (Slide)
Strokes Per Minute	1,000 - 1,800 SPM	0 - 2,000 / 0 - 3,600 / 0 - 4,400 SPM	1,350 SPM	2,500 SPM
Cutting Width	25-1/2" (65 cm)	23-5/8" (60 cm)	22" (56 cm)	7-7/8" (20 cm)
Maximum Cutting Thickness	11/16" (1.8 cm)	7/8" (2.1 cm)	15/32" (1.2 cm)	5/16" (0.8 cm)
Overall Length	48-1/2" (123 cm)	43-3/4" (111.3 cm)	38" (96.3 cm)	19-7/8" (50 cm)
Net Weight	8.9 lbs (4.0 kg)	8.2 lbs (3.7 kg)	6.0 lbs (2.7 kg)	2.5 lbs (1.1 kg)

# POLE HEDGE TRIMMERS

4-STROKE POWER



With **Adjustable Cutting Heads**  
ideal for reaching tall hedges or shrubs



- Complies with CARB Tier 3, EPA Phase 2, EU Stage 2 Emissions Requirements
- *Multi-position Engine Lubrication System* allows Makita 4-Stroke Pole Hedge Trimmers to be operated at any angle for maximum versatility
- *135° Hedge Trimmer Head Articulation* (-90° - 45°) with 13 positive stops (11.25° increments)
- *Pin Style Angle Securing System* provides added retention at positive stop angles versus friction securing systems
- Hedge Trimmer *Blades Fold Up To 180°* to provide compact size during transport or storage
- *Clutch Prevents Engagement Of Hedge Trimmer Head* when folded in the 180° position for maximum safety during transport or storage

## 25.4cc Pole Hedge Trimmers

With Adjustable Cutting Heads

**6'-7" Overall Length**  
**19-1/4" Cutting Length**  
**Short Shaft**  
EN4951SH



**8'-3" Overall Length**  
**19-1/4" Cutting Length**  
**Long Shaft**  
EN4950H



SPECIFICATIONS	EN4950H	EN4951SH
Displacement	25.4cc	
Maximum Engine Power	0.77 Kw / 1.03 HP	
Cutting Length	19-1/4" (49 cm)	
Fuel Tank Capacity	0.6 L	
Overall Length	99" (255 cm)	80-1/2" (205 cm)
Net Weight	15.2 lbs (6.9 kg)	14.5 lbs (6.6 kg)

## 4-STROKE POWER



**MM4**  
MAKITA MINI 4-STROKE ENGINE

With **Fixed Cutting Heads**  
for use in vertical cutting applications

- **Short Shaft Style** ideal for vertical cutting of tall hedges and shrubs
  - Complies with CARB Tier 3, EPA Phase 2, EU Stage 2 Emissions Requirements
- **Multi-position Engine Lubrication System** allows Makita 4-Stroke Pole Hedge Trimmers to be operated at any angle for maximum versatility
- **Wide Trigger Control** and **Soft Rubber Grip** design for comfortable operation

## 25.4cc Pole Hedge Trimmers With Fixed Cutting Heads

**Double Sided Blades**  
for versatile cutting utilising  
both sides of the blade!

5'-11" Overall Length

2  
YEAR  
WARRANTY

6'-27" Overall Length

2  
YEAR  
WARRANTY

28-3/4" Cutting Length

**Short Shaft**  
EN7350SH

23-1/4" Cutting Length

**Short Shaft**  
EN5950SH

**Single Sided Blade**  
with Chip Receiver Attachment!

SPECIFICATIONS	EN5950SH	EN7350SH
Displacement	25.4cc	
Maximum Engine Power	0.77 Kw / 1.1 HP	
Cutting Length	23-1/4" (59 cm)	28-3/4" (73 cm)
Fuel Tank Capacity	0.6 L	
Overall Length	70" (178 cm)	75-1/4" (191 cm)
Net Weight	13.2 lbs (6.0 kg)	13.7 lbs (6.2 kg)

# POLE CHAINSAW / CULTIVATOR

4-STROKE POWER

CORDLESS POWER

**8' to 13'**  
**25.4cc**  
**10" High Reach**  
**Pole Chainsaw**  
**EY2650H25H**

Multi-Position Engine Lubrication System

**MM4**  
MAKITA MINI 4-STROKE ENGINE

2  
YEAR  
WARRANTY

**10" Cutting Length**

**Specialized saw for limbing & pruning in high reach areas**

- Telescoping shaft easily adjusts from 8 ft. to 13 ft. allowing access to hard-to-reach branches
- Weighs only 16.0 lbs. with reduced cutting head weight for improved balance and reduced operator fatigue
- Heavy duty dual-stage air filter with large sealing areas is easily accessible

SPECIFICATIONS	EY2650H25H
Displacement	25.4cc
Chain Pitch / Gauge	3/8" / .050"
Maximum Engine Power	0.77 Kw / 1.1 HP
Maximum Engine Speed	10,000 RPM
Cutting Length	10" (25.5 cm)
Fuel Tank Capacity	600 ml
Oil Tank Capacity	120 ml
Overall Length	154-1/2" (272 cm)
Net Weight	16 lbs (7.2 kg)



**4-Stroke Engine Maintenance Kit**

for Hedge Trimmers,  
Split Shaft Engine Unit  
& Pole Chainsaw



**18Vx2**  
**Cultivator**  
**HKU01ZX2**

**13-3/4" Cultivating Width**

**X2**  
18V → 18V → 36V

**Highly efficient  
lightweight  
design!**



- Zero Emissions and Low Noise Level ideal for use in sensitive work environments, including residential areas and more
- Adjustable 3-Stage Handle enables positioning at optimal angle of operation or for more compact storage when not in use
- Battery Capacity Warning Light indicates approximate remaining battery power for each battery
- Transport Wheels enable easy movement around the work site and can be folded upright when not in use
- Carrying Handles enable easier loading or unloading from vehicle or trailer
- 2-Step Switch / Handle Lever Starting System and Child Lock Key prevents accidental start up for maximum safety

SPECIFICATIONS	HKU01ZX2
Battery Capacities	36V Li-Ion or two 18V Li-Ion
No Load Speed	Tine Axle Speed: 85 RPM Motor Speed: 4,100 RPM
Cultivating Width	13-3/4" / 8-7/8" (35 / 22.5 cm)
Tine Diameter	9-5/8" (24.5 cm)
Transmission Speeds	1-Forward
Overall Length	47" (119.3 cm)
Net Weight	48.5 lbs (22.2 kg)

## CORDLESS POWER

- **Dual Blade** action cuts quickly with shearing effect
- **Battery Warning Light** indicates low battery capacity
- **Compact Design** for added versatility
- **Tool-less Blade Changing System** for easy blade changes
- **Left and Right Hand Lock Off Button** for operator safety

**6-5/16"**  
**Cutting Width**



**18V**  
**LITHIUM-ION**  
**18V Grass Shear**  
**DUM604Z**

Tool only. Battery & charger sold separately.

**DUM604Z:**  
**with Grass Catcher**



**12V**  
**LITHIUM-ION**  
**CXT**

**12V Grass Shears**  
**UM600DZ / MU01Z**

Tool only. Battery & charger sold separately.

**UM600DZ:**  
**12V MAX CXT Slide**  
**MU01Z:**  
**12V MAX (1.3 Ah) Pod**

**Grass Catcher enables quick and easy depth adjustment**



**Optional Hedge Trimmer Attachment**  
for DUM604Z, UM600DZ & MU01Z

Shear Blade Assembly 198409-9 / Chip Receiver Set 198402-3  
Blade Cover 195274-7



**Grass Shear Extension Handle**  
195187-2

**For use with 18V or 12V Grass Shears!**

## ACCESSORIES

SPECIFICATIONS	DUM604Z	MU01Z
Battery Capacities	18V Li-Ion	12V Li-Ion
Strokes Per Minute	2,500 SPM	1,250 SPM
Cutting Width	6-5/16" (16 cm)	
Depth Adjustment	5/8" / 13/16" / 1-5" (1.5 cm / 2 cm / 2.5 cm)	3/8" / 9/16" / 1" (1 cm / 1.5 cm / 2.5 cm)
Overall Length	13-7/8" (35.3 cm)	11-1/2" (29.2 cm)
Net Weight	2.5 lbs (1.1 kg)	2.0 lbs (0.9 kg)

# RECIPROCATING SAWS

## CORDLESS POWER

With  
Sky Hook

With  
Sky Hook

Ultra-compact and lightweight  
design for maximum versatility  
and maneuverability



Tool only. Battery & charger sold separately.

- Accepts two x 18V Li-Ion batteries without a battery converter for use with existing 18V Li-Ion battery platform
- Retractable Sky Hook allows tool to be hung on rafters, pipes or scaffolding
- 2 speed settings provides ideal settings for wood or metal cutting applications



Tool only. Battery & charger sold separately.

- 2 speed settings provides ideal settings for wood or metal cutting applications
- Newly designed vertical crank mechanism minimizes blade deflection and reduces vibration
- Retractable Sky Hook allows tool to be hung on rafters, pipes or scaffolding



Tool only. Battery & charger sold separately.

- Multi-position switch (tool handle & tool body) with lock-off levers for easier operation, maximum versatility and operator safety
- Battery protection system provides over-discharge, temperature and circuit protection for enhanced performance, battery cycle life and overall battery life
- One-handed, fast tool-less blade changes
- LED joblight with afterglow feature

## ACCESSORIES



See page 33 for more details

SPECIFICATIONS	DJR360Z	DJR187Z	DJR183Z
Battery Capacities	Two 18V Li-Ion	18V Li-Ion	
Maximum Cutting Capacities	Pipe: 5-1/8" (13 cm) Wood (11-3/4" Blade): 10" (25.5 cm)	Pipe: 2" (5 cm) Wood (12" Blade): 2" (5 cm)	
Strokes Per Minute	High: 0 - 3,000 SPM Low: 0 - 2,300 SPM		0 - 3,000 SPM
Length of Stroke	1-1/4" (3.2 cm)		1/2" (1.3 cm)
Overall Length	17-3/4" (44.9 cm)		15-5/8" (39.8 cm)
Net Weight	6.2 lbs (2.8 kg)	6.9 lbs (3.1 kg)	2.7 lbs (1.2 kg)

# LOG HOME BUILDING TOOLS

## ELECTRIC POWER

### 12-1/4" Planer

KP312



**2-Blade cutter head makes  
24,000 cuts per minute**

- Unrivaled for power, size and performance
- Larger and sturdy sole plate for added stability
- Front roller for easy moving over rough materials
- Guide rule for accurate and maximum use of planing width
- Poly "V" belt designed with grooves efficiently transfers power from the motor to the blades
- Large ejection chute provides high rate of chip discharge

### 6-3/4" Planer

1806B



**30,000 cuts per minute**

- Unrivaled for power, size and performance
- Large Base Plate for maximum stability
- Machined Aluminum Base for planing accuracy
- Depth Adjustment Knob for precision planing applications
- Lock-On Button enables easy continuous operation



Includes:  
**Wooden  
Carrying  
Case**

### 4-3/8" Planer

1002BA



**For even smooth removal  
over dips & rises in wood**

- Large Planing Width engineered for an Even Cut
- Precision machined base for notching out logs at a 12-5/8" curved radius
- Planes 4-3/8" width and 3/16" deep in a single pass
- Large ejection chute for high rate of chip discharge
- Conveniently located front and rear grips for operator control
- Lock-On Button enables easy continuous operation
- Smooths and notches out logs for a perfect fit
- Large conveniently located depth settings knob for easy adjustments

#### Planer Blades




#### Bevel Guide



#### Blade Gauge Assembly



#### Sharpening Holder Assembly



#### Dressing Stone



## ACCESSORIES

See page 32 for more details

SPECIFICATIONS	KP312	1806B	1002BA
Maximum Capacities	Planing Width: 12-1/4" (31 cm) Planing Depth: 1/8" (.35 cm)	Planing Width: 6-3/4" (17 cm) Planing Depth: 1/16" (.2 cm)	Planing Width: 4-3/8" (11 cm) Planing Depth: 5/32" (.4 cm) Curve Radial Cuts: 11-3/16" (30 cm) Curved Radius: 12-19/32" (32 cm)
No Load Speed	12,000 RPM	15,000 RPM	
AMPS (120V)	15.0 A	10.9 A	9.6 A
Overall Length	21-3/4" (55 cm)	20-3/4" (53 cm)	13-5/16" (34 cm)
Net Weight	40.6 lbs (18.4 kg)	40.6 lbs (18.4 kg)	11.5 lbs (5.2 kg)




**4-3/4"  
Wheel  
Sander**  
9741

**Unique design - fast, easy and controlled operation**

- Fast and efficient paint and rust removal
- Well balanced design with a low center of gravity and large front loop handle for easy handling

## ABRASIVE WHEELS



**100G  
Nylon  
Wire  
Brush**  
Medium  
Sanding



**40G  
Slit  
Paper  
Wheel**  
Sanding

See page 32 for more details

SPECIFICATIONS	9741
Wheel Size	3-15/16" x 4-23/32" (10 cm x 12 cm)
No Load Speed	3,500 RPM
AMPS (120V)	7.8 A
Overall Length	12-1/4" (31 cm)
Net Weight	9.3 lbs (4.2 kg)



**Electric  
brake**

**16-5/16"  
Circular  
Saw**  
5402NA

**Large capacity for beam  
and timber cutting**

- Powerful Motor delivers 1,800 max watts out
- Rugged Steel Base for maximum stability
- Electric Brake for increased operator safety
- Blade Stabilizer for stable blade rotation and superior cutting performance
- Large Depth Control Lever for convenience and secure adjustments



**SUPER JOINT SYSTEM™  
SJS**

**10-1/4"  
Circular  
Saw**  
5104

**"SJS" Technology,  
Electric brake**

- "SJS" Technology prevents kickback if blade jams, protecting the operator and the tool
- Electric Brake for increased operator safety
- Lock-Off Button prevents accidental start-up for operator safety
- Diecast Aluminum Base for maximum operational stability
- Compact Blade Case and reduced overall tool height for enhanced operational versatility

SPECIFICATIONS	5402NA	5104
Blade Diameter	16-5/16" (41 cm)	10-1/4" (26 cm)
Arbor	1" (2.5 cm)	5/8" (1.5 cm)
Maximum Cutting Capacities	0": 6-1/4" (15.8 cm) 45": 4-3/16" (10.6 cm)	0": 3-3/4" (9.5 cm) 45": 2-3/4" (6.9 cm)
No Load Speed	2,300 RPM	3,800 RPM
AMPS (120V)	15.0 A	
Overall Length	24-1/4" (61.6 cm)	16" (40.5 cm)
Net Weight	32.2 lbs (14.6 kg)	20.3 lbs (9.2 kg)

## ELECTRIC POWER

## CORDLESS POWER



**3,200  
RPM**

**Chain  
Mortiser**  
7104L



**Perfect for timber  
framing and log  
home building**

- Cuts lap joints up to 5-1/8"
- Notches or cuts holes in thick wood stock quickly, cleanly and accurately
- Quick horizontal chain lever for widening holes
- Base mounts onto a max. 12" beam
- Large adjustable vise for attaching firmly onto logs

SPECIFICATIONS	DLM431Z
Capacities	Max Hole Width (Longitudinal): 5-1/8" (13 cm) Max Hole Width (Transverse): 1-1/4" (3.1 cm) Max Hole Depth: 6-1/8" (15 cm)
No Load Speed	3,200 RPM
AMPS (120V)	10.5 A
Overall Length	20-1/8" (51 cm)
Net Weight	38.1 lbs (17.3 kg)

## 1/4" Impact Driver DTD170Z

Tool only. Battery & charger sold separately.

**BRUSHLESS**



**Features NEW 'Cam-Out'  
elimination mode and  
ULTRA-COMPACT DESIGN**

- eXtreme Protection Technology (XPT) offers maximum protection against dust, debris and liquids for optimal performance in extreme conditions
- 4 stage impact power selection + TEK and 'Cam-Out' modes to ensure precise fastening and prevent damage to fasteners
- 'Cam-out' elimination mode operates at low speed until fastening begins to eliminate 'cam-out' and cross-threading
- TEK mode reduces impact power during final stages of fastener seating
- LED charge level indicator displays approximate remaining battery power

## ACCESSORIES



**Threaded  
Rod Sockets**

**Hollow Sockets**

See page 32 for more details

SPECIFICATIONS	DTD170Z
Battery Capacities	18V Li-Ion
Hex Shank	0 - 3,600 / 3,200 / 2,100 / 1,100 RPM
Impacts Per Minute	0 - 3,800 / 3,600 / 2,600 / 1,100 IPM
Maximum Fastening Torque	1,550 in. lbs (175 Nm)
Overall Length	4-5/8" (11.7 cm)
Net Weight	2.0 lbs (0.9 kg)

# GENERATORS

## 4-STROKE POWER

Electric  
start



8.2 Hours  
of continuous operation

12,000W  
653cc Generator  
G12000R

Starting battery not included



6.6 Hours  
of continuous operation

7,100W  
404cc Generator  
EG711A



GENERATOR FEATURES & BENEFITS	G12000R FEATURES IDLE MODE	EG711A
Receptacles	Duplex 120V (20 AMP), Locking 120V (20 AMP) Locking 120V (30 AMP), Locking 120V / 240V (30 AMP)	
Generator	Full copper windings, AC & DC circuit breakers, Automatic Voltage Regulator	
Engine	EX series Subaru-Robin™ 4-cycle engine	

## Why professionals prefer Makita generators powered by **EX series Subaru-Robin™ 4-cycle engines**

- Case-hardened steel timing chain allows for precision timing and maximum durability
- Heavy-duty piston rings and a cast-iron cylinder liner resist wear and ensure a long engine life
- Hardened steel rocker arms with precision tappet adjusters are used for greater durability and reduce service requirements
- Dual ball bearing crankshaft offers maximum durability under load
- Chain-driven overhead cam design offers superior power and performance with an automatic decompression system to reduce the required pulling force by 30% to 40%. EX engines start easily – even in cold Canadian winters.
- Cooling fins cast into the interior and exterior of the block maximize surface area for superior engine cooling
- Electronic ignition, low oil shut-off and automatic idle / full power throttle control

SPECIFICATIONS	G12000R	EG711A
Maximum Output Current	12,000W (100 / 50 AMP)	7,100W (59.2 / 29.6 AMP)
Rated Output Current	9,500W / 79.2 / 39.6 A	5,000W / 41.6 / 20.8 A
AC Voltage	60 Hz (120V / 240V)	
DC Voltage	12 VDC (8.3 AMP)	
Displacement	653cc	404cc
Maximum Power	22 HP @ 3,600 RPM	12.5 HP @ 4,000 RPM
Fuel Tank Capacity	44 L	22 L
Noise Level	77 dB	75.5 dB
Overall Length	32.5" (82.6 cm)	28-1/2" (72.5 cm)
Dry Weight	310.0 lbs (141 kg)	189.6 lbs (86 kg)

# GENERATORS

Approximate Wattage Requirements	Generator Selection Chart	
Starting / Running	G12000R	EG711A
<b>CENTRAL AIR</b> 32,000 BTU <b>11,500 / 5,500</b> 24,000 BTU <b>8,800 / 3,800</b> <b>ELECTRIC WELDER</b> 200 AMP A/C <b>9,000 / 9,000</b>		
<b>CLOTHES DRYER</b> <b>7,100 / 5,750</b> <b>AIR COMPRESSOR</b> 3 HP <b>6,800 / 3,000</b> 2.5 HP <b>5,900 / 2,500</b>		
<b>AIR COMPRESSOR</b> 2 HP <b>5,100 / 2,000</b> <b>CIRCULAR SAW</b> <b>3,700 / 1,400</b> <b>SUMP PUMP</b> 1/2 HP <b>3,200 / 1,050</b> <b>WELL PUMP</b> 1/2 HP <b>3,100 / 1,000</b>		
<b>FURNACE FAN</b> 1/2 HP <b>3,000 / 875</b> <b>WASHING MACHINE</b> <b>3,000 / 750</b> <b>REFRIGERATOR</b> <b>2,900 / 700</b>		
<b>COFFEE MAKER</b> <b>1,750 / 1,750</b>		
<b>MICROWAVE</b> 750W <b>1,550 / 750</b> <b>DRILL</b> <b>1,500 / 600</b> <b>BATTERY CHARGER</b> 15 AMP <b>1,200 / 500</b> <b>CHAINSAW</b> 2 HP <b>1,100 / 1,100</b> <b>COMPUTER</b> <b>700 / 700</b> <b>TELEVISION</b> <b>300 / 300</b>	<b>12,000W</b> 	<b>7,100W</b> 

This chart is for reference only. The wattage requirements for your appliance, motor, or tool may require more or less wattage than is listed in this chart. Please refer to your owners manual to verify whether or not your generator is appropriate for the equipment you wish to run. You may also contact your local Makita Factory Service Centre for additional information if you plan on purchasing a new generator.

**Note:** All wattage requirements are approximate. Values are subject to change without notice

**8.2 Hours**  
of continuous operation  
**653 cc**  
**Generator**  
**G12000R**  
 Starting battery not included

**6.6 Hours**  
of continuous operation  
**404 cc**  
**Generator**  
**EG711A**

# TRASH & WATER PUMPS

## 4-STROKE POWER

- **EW320TR & EW3050H** Powered by **EX Series Subaru-Robin™ 4-cycle Engines**
- Meets **EPA / CARB** emission standards
- **Self Priming Centrifugal Pump** for easy operation



**2.3 Hours**  
of continuous operation

**92' Total Head\***

**3" Suction / Discharge Diameter**

**90HP  
Trash Pump**

**EW320TR**



**0.9 Hours**  
of continuous operation

**135' Total Head\***

**1" Suction / Discharge Diameter**

**1.0HP Centrifugal  
Water Pump**

**EW1050H**

\* Total head: Total height at sea level, to which water can be raised above original water level.

### STRAINERS

Available for 1", 2" and 3" diameter suction hoses



### PVC SUCTION HOSES

**NON-COLLAPSIBLE**

Available for 1", 2" and 3" diameter trash and water pumps

### ACCESSORIES

#### PVC DISCHARGE HOSES

Available for 1", 2" and 3" diameter trash and water pumps









SPECIFICATIONS	EW320TR	EW1050H
Suction Head	26' (8.0 m)	29' (8.7 m)
Maximum Pumping Capacity: Litres Per Minute	1,300 LPM	110 LPM
Fuel Mix	<b>No Fuel Mixing</b>	
4-Stroke Oil	<b>10W-30</b>	
Fuel Tank Capacity	6.1 L	500 ml
Overall Length	26.5" (67.2 cm)	12-1/2" (31.9 cm)
Dry Weight	106.9 lbs (48.5 kg)	12.8 lbs (5.8 kg)

# TRASH & WATER PUMPS

4-STROKE POWER

## WATER & TRASH PUMP ACCESSORIES

Water & Trash Pump Accessories

	Description	Size	For Model(s)	Part No.
	<b>PVC Suction Hoses (Non-Collapsible)</b>	1" x 20'	EW120R / EW1050H	<b>123048-A</b>
		2" x 20' (Includes Male / Female Fittings)	EW220R / EW2050H	<b>123042-A</b>
		3" x 20' (Includes Male / Female Fittings)	EW320R / EW320TR EW3050H	<b>123043-A</b>
	<b>PVC Discharge Hoses</b>	1" x 25'	EW120R / EW1050H	<b>123049-A</b>
		1" x 50'		<b>128049-A</b>
		2" x 50' (Includes Male / Female Fittings)	EW220R / EW2050H	<b>123045-A</b>
		3" x 50' (Includes Male / Female Fittings)	EW320R / EW320TR EW3050H	<b>123046-A</b>
	<b>Replacement Gaskets for Female Fittings</b>	2"	EW220R / EW2050H	<b>421002-A</b>
		3"	EW320R / EW320TR EW3050H	<b>421003-A</b>
	<b>Strainer</b>	1"	EW120R	<b>480-02550-29</b>
			EW1050H	<b>ME01689268</b>
		2"	EW220R / EW2050H	<b>480-05050-29</b>
		3"	EW320R / EW320TR	<b>480-08310-33</b>
	<b>Tool Kit</b>	-	EW120R	<b>5929002000</b>
			EW220R / EW2050H EW320R / EW320TR	<b>277-90301-H0</b>
	<b>Spanner Wrench</b>	2" Hose	EW220R / EW2050H	<b>781001-A</b>
		3" Hose	EW320R / EW320TR EW3050H	<b>781002-A</b>



**MM4**  
MAKITA MINI 4-STROKE ENGINE

# POWER CUTTER ACCESSORIES

## 14" 3D PREMIUM Diamond Blade

T-02836

### PREMIUM PROFESSIONAL PERFORMANCE



- Features 3D Diamond Grid Technology incorporating even placement of diamond content throughout the segment
- 3D pattern releases worn diamond and exposes sharp diamond at a consistent rate
- Offers premium professional performance versus traditional diamond blades
- Keyhole expansion slots promotes blade cooling
- Laser welded segments ensure the strongest possible joint
- Segmented style rim
- Ideal for concrete, asphalt, brick and block

## 14" Metal Cutting Blade for Power Cutters

A-96229

### FASTEST CUTTING MORE CUTS



- Offers up to 100x the life of abrasive wheels
- Ideal for cutting angle iron, rebar, deck plating, steel studs, pipe and more!
- Premium diamond content for long life and fast cutting
- Expertly balanced premium steel core for reduced vibration and noise
- Vacuum brazed diamond segments for optimum operational life and consistent performance
- Eliminates performance issues of abrasive wheels, including disc shrinkage, glazing and shattering
- Segmented Rim style reduces heat buildup and maximizes material removal

## Optimum Diamond Blades

Optimum Bond Matrix provides the optimal balance between wear, fracture and exposure in order to maximize the cutting ability of the diamond content

### Segmented Rim



General purpose quick cutting blade for concrete, tile, brick & stone

### Turbo Rim



Fast and clean cutting blade for all applications

#### OPTIMUM™ Diamond Blades

Blade Diameter	Arbor	Rim Type	Wet / Dry	Material Type	Application	Max. RPM	For Model(s)	Part No.
16"	1" 20 mm	Segmented Rim	Wet or Dry	Medium	Cured Concrete, Block, Brick, Masonry	4,800 RPM	EK8100	A-94742
				Soft	Asphalt, Green Concrete, Sand Stone			A-94661
14"	1" 20 mm	Turbo Rim	Wet or Dry	Hard	Granite, Ceramic, Stone	5,400 RPM	4114 EK6101 EK7301 / HD EK7651H / HD	A-94627
		Medium		Cured Concrete, Block, Brick, Masonry	A-94736			
		Medium & Soft (Dual Purpose)		Concrete & Asphalt	T-01270			
		Soft		Asphalt, Unset Concrete, Sandstone	A-94655			
12"	1" 20 mm	Segmented Rim	Wet or Dry	Medium	Cured Concrete, Block, Brick, Masonry	6,300 RPM	4112H DPC6430	A-94720
				Medium & Soft (Dual Purpose)	Concrete & Asphalt			T-01264



# POWER CUTTER ACCESSORIES

## Vacuum Brazed Diamond Rescue Wheels

- Developed specifically for rescue operations, including cutting through airplanes, trains and crash barriers
- Ideal for use with Makita 12" and 14" Angle & Power Cutters!

Blade Diameter	Arbor	Rim Type	Wet / Dry	Application	Max. RPM	For Model(s)	Part No.
12"	1"	Segmented Rim	Dry	Steel, stainless steel, alloys, aluminum, resin, PVC, concrete, reinforced glass, fibre-reinforced plastics	6,400	4112H	<b>B-56998</b>
14"					5,400	4114 EK7651H EK7301 EK6101	<b>B-57009</b>

## 10L Power Cutter Pressurized Water Tank 988 394 610



Enables Dust Free Operation When Direct / Main Water Sources Are Not Available

## Power Cutters Filters & Accessories

Filter Type	DPC6430	EK6101	EK7301 EK7301HD	EK7651H EK7651HD	EK8100
 Foam Filter	<b>395 173 081</b>	N/A	<b>395 173 081</b>	<b>195945-6</b>	<b>395 173 081</b>
 Paper Filter	<b>395 173 011</b>	<b>315 173 010</b>	<b>395 173 011</b>	<b>442165-6</b>	<b>395 173 011</b>
 Nylon Filter	<b>395 173 021</b>	<b>315 173 020</b>	<b>395 173 021</b>	<b>424399-3</b>	<b>395 173 021</b>
 Filter Sets (5 Pcs)	<b>957 173 160</b>	N/A	<b>957 173 611</b>	N/A	<b>957 173 611</b>

## Power Cutter Guide Trolley




Power Cutter Shown Sold Separately




Part No.	Description	Includes	For Models
<b>394 369 600</b>	• Heavy Duty Tubular Aluminum Construction • Ideal for maintaining precise cutting position and depth during operation	• Water Tank • Water System • Depth Limiter	DPC6430 EK7301 / HD EK8100
<b>394 369 610</b>			EK7651H / HD

## Angled Fuel Filter

395 114 300	Description	For Models
	Installs quickly and easily to enable fuel re-filling while the power cutter is in the upright position or fitted to a guide trolley	DPC6430 EK7301 / HD EK8100

## Power Cutter Service Set

957 394 004	Description	For Models
	• Drive Belt, • Fuel Cap (2 ea.) • Starter Cord (2 ea.) • Combination Wrench • Spark Plug • Fuel Filter	DPC6430 EK7301 / HD EK8100

## Power Cutter Filter Oil & Cleaner

Part No.	Description	For Models
<b>980 008 627</b>	Power Cutter Filter Cleaner (0.5 L)	DPC6430 EK6101 EK7301 / HD EK7651H / HD EK8100
<b>980 008 628</b>	Power Cutter Filter Oil (1.0 L)	
<b>980 008 629</b>	Power Cutter Filter Cleaner & Oil Set	

## Abrasive Wheels

Wheel Diameter	Arbor	Thickness	Wet / Dry	Application	Max RPM	For Model(s)	Part No.
16"	20 mm	3/16"	Wet / Dry	Concrete, Stone, Masonry & Asphalt	4,250 RPM	EK8100	<b>966 161 020</b>
			Dry	Steel & Ferrous Metals			<b>966 161 050</b>
14"	1"	5/32"	Wet / Dry	Concrete, Stone, Masonry & Asphalt	5,500 RPM	4114 EK7301HD EK7651HD	<b>966 144 120</b>
			Dry	Steel & Ferrous Metals			<b>966 144 152</b>
	20 mm	5/32"	Wet / Dry	Concrete, Stone, Masonry & Asphalt		EK6101 EK7301 EK7651H	<b>966 141 120</b>
		3/16"	Dry	Steel & Ferrous Metals			<b>966 141 150</b>
12"	20 mm	1/8"	Wet / Dry	Concrete, Stone, Masonry & Asphalt	5,400 RPM	DPC6430	<b>966 121 120</b>
			Dry	Steel & Ferrous Metals	6,400 RPM		<b>966 121 150</b>

# LOG HOME BUILDING TOOLS ACCESSORIES


## Planer Blades



Style	Description	For Models	2 / Pk Part No.
4-3/8"	High Speed Steel - Single Edge	1002BA 1911B	<b>793008-8</b>
	Carbide - Single Edge		<b>D-17245</b>
6-3/4"	High Speed Steel - Single Edge	1806B	<b>D-63666</b>
12"	High Speed Steel - Double Edge Reversible	2012NB	<b>793346-8</b>

Visit [makita.ca](http://makita.ca) for our full line of  
**PLANER BLADES & ACCESSORIES**

## Hollow Sockets

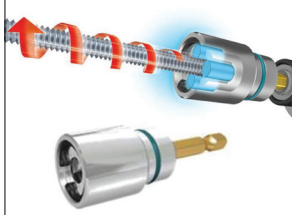

**Enables fast and effortless installation of 3/8" and 1/2" threaded rod**

- Available for 3/8" (B-51611) and 1/2" (B-51627) threaded rod
- 1/4" hex shank
- Use with Makita Drills / Drivers, Hammer Drills / Drivers  
**(DO NOT OPERATE IN HAMMER MODE)** or Impact Drivers

## Hollow Sockets



Socket Size	Threaded Rod / Bolt Size	Length	Application	Shank	Part No.
7/16"	1/4"	3"	Nuts	1/4" Hex	<b>B-50784</b>
		6"	Bolts		<b>B-50790</b>
		12"	Threaded Rod		<b>B-50809</b>
		18"			<b>B-50815</b>
		24"			<b>B-50821</b>
9/16"	3/8"	3"	Nuts		<b>B-43290</b>
		6"	Bolts		<b>B-43309</b>
		12"	Threaded Rod		<b>B-43315</b>
		18"			<b>B-43321</b>
		24"			<b>B-43337</b>
3/4"	1/2"	3"	Nuts		<b>B-43343</b>
		6"	Bolts		<b>B-43359</b>
		12"	Threaded Rod		<b>B-43365</b>
		18"			<b>B-43371</b>
		24"			<b>B-43387</b>
15/16"	5/8"	3"	Nuts	<b>B-50837</b>	
		6"	Bolts	<b>B-50843</b>	
		12"	Threaded Rod	<b>B-50859</b>	
		18"		<b>B-50865</b>	
		24"		<b>B-50871</b>	

## Wheel Sander Abrasive Wheels

Description	Grit	Application	For Model	Part No.
 Slit Paper Wheel	40G	Sanding	9741	<b>794380-1</b>
 Wire Brush Wheel	-	Metal Finishing		<b>794382-7</b>
 Cotton Buff Wheel	-	Polishing		<b>794381-9</b>
 Nylon Brush Wheel	40G	Coarse Sanding		<b>794384-3</b>
	100G	Medium Sanding		<b>794379-6</b>
	200G	Fine Sanding		<b>794383-5</b>

## Circular Saw Blades



Blade Diameter	Arbor	# of Teeth	Grind Angle	Hook Angle	Kerf	Max. RPM	Material	For Model(s)	Part No.
16-5/16"	1"	32 CT	ATB	20°	.091"	3,680	Wood	5402NA	<b>A-95093</b>
		60 CT	FTG	20°	.102"	4,300			<b>792118-8</b>
10-1/4"	5/8"	24 CT	-	-	-	5,870		5104 HS0600	<b>A-94910</b>

# RECIPROCATING SAW / HEDGE TRIMMER ACCESSORIES


## Reciprocating Saw Blades

Length	TPI	Width	Thickness	Material	Blade Type	Recommended Use	Part No.	Pk
<b>Masonry</b>								
8"	Tungsten Carbide Grit	3/4"	.040"	-	Straight Back	Brick, Tile, Marble, Stone, Chalkboard, Cast Iron, Melamine, Veneer & Fibreglass	<b>723077-A-2</b>	<b>2 / Pk</b>
9-1/2"	2 Carbide Teeth	1"	.0625"	-	Straight Back	Aerated Concrete, Concrete Block & Brick, Low Aggregate Concrete & Masonry, Abrasive Materials	<b>B-12809</b>	<b>1 / Pk</b>
12"	2 Carbide Teeth	2"	.0625"	-	Straight Back	Aerated Concrete, Concrete Block & Brick, Low Aggregate Concrete & Masonry, Abrasive Materials	<b>B-10394</b>	<b>1 / Pk</b>
<b>Wood Cutting</b>								
8"	Progressive	3/4"	.050"	High Carbon Steel	Taper Back	Fast, Clean Cutting in Wood from 1/4" - 4"	<b>723078-A-5</b>	<b>5 / Pk</b>
9"	3	3/4"	.050"	High Carbon Steel	Taper Back	Very Fast, Aggressive Cutting in Green Wood from 5/8" - 6"	<b>723053-A-5</b>	<b>5 / Pk</b>
9"	6	3/4"	.050"	High Carbon Steel	Taper Back	Very Fast, Aggressive Cutting in Green Wood from 5/8" - 6"	<b>723052-A-5</b>	<b>5 / Pk</b>
<b>Specialty</b>								
6"	6	3/4"	.050"	Stainless Steel	Straight Back	Bone, Horn, Frozen Foods, Ice, Pruning	<b>B-52043</b>	<b>1 / Pk</b>
9"	6	3/4"	.050"	Stainless Steel	Straight Back	Bone, Horn, Frozen Foods, Ice, Pruning	<b>B-30564</b>	<b>1 / Pk</b>
9"	10	3/4"	.050"	Stainless Steel	Straight Back	Meat, Frozen Foods, Ice	<b>B-30570</b>	<b>1 / Pk</b>
12"	6	3/4"	.050"	Stainless Steel	Straight Back	Bone, Horn, Frozen Foods, Ice, Pruning	<b>B-23248</b>	<b>1 / Pk</b>
12"	10	3/4"	.050"	Stainless Steel	Straight Back	Meat, Frozen Foods, Ice	<b>B-23254</b>	<b>1 / Pk</b>
7"	8.5	3/4"	.024"	High Carbon Steel	Straight Back	Green Wood, Pruning	<b>B-56580</b>	<b>1 / Pk</b>
7"	15	3/4"	.024"	High Carbon Steel	Straight Back	Green Wood, Pruning, Bamboo, PVC	<b>B-56596</b>	<b>1 / Pk</b>
9"	8.5	3/4"	.035"	Bi-Metal	Straight Back	Green Wood, Pruning	<b>B-57386</b>	<b>1 / Pk</b>
9"	15	3/4"	.035"	Bi-Metal	Straight Back	Green Wood, Pruning, Bamboo, PVC	<b>B-57392</b>	<b>1 / Pk</b>
10"	8.5	3/4"	.039"	High Carbon Steel	Straight Back	Green Wood, Pruning	<b>B-62016</b>	<b>1 / Pk</b>

B-23248

723053-A-5

## Hedge Trimmer Accessories

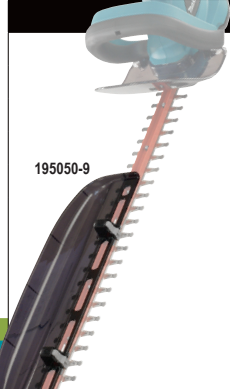	Blade Cover Part No.	Chip Receiver Part No.	For Models
	195274-7	198402-3	<b>UH201DZ</b>
	450490-1	194681-1	<b>DUH651Z, UH5570, UH6570</b>
	451868-1	451866-5	<b>EN7350SH</b>
	452327-8	-	<b>EH6000W</b>
	452328-6	-	<b>EN401MP, EN4950H</b>
	453723-3	195050-9	<b>DUH523Z</b>
	454277-3	-	<b>EH7500W</b>
	454278-1	-	<b>EN5950SH</b>
	454279-9	-	<b>EH5000W, EN410MP, EN4951SH</b>
	457036-4	-	<b>EN420MP</b>

# CHAINSAW ACCESSORIES

Chain Saw Bar and Chain Reference Chart

 										
Models	Bar Length	Gauge	Pitch	Chain Part No.	Chain Type	Bar Mount	Drive Link	Bar Part No.	Cover Part No.	File Size
<b>Cordless / Electric Chainsaws</b>										
<b>DUC122</b>	4-1/2" / 11.5 cm	.050"	1/4"	791284-8	25AP	N/A	42	158476-6	416311-7	5/32"
<b>DUC254</b>	10" / 25 cm	.043"	3/8"	199075-5	90PX	A041	39	161846-0	452093-7	4.5 mm
<b>DUC302</b>	12" / 30 cm	.043"	3/8"	531 290 046	90PX	A041	46	165245-8	419288-5	4.5 mm
<b>DUC355 DUC405 DUC353 DUC400</b>	12" / 30 cm	.043"	3/8"	196740-7	90PX	A041	46	165245-8	419288-5	4.5 mm
	14" / 35 cm	.043"	3/8"	196741-5	90PX	A041	52	165246-6	419288-5	4.5 mm
	16" / 40 cm	.043"	3/8"	196742-3	90PX	A041	56	165247-4	419242-9	4.5 mm
<b>UC3530A UC3551A</b>	14" / 35 cm	.050"	3/8"	528 092 652	91PX	A041	52	165201-8	419288-5	5/32"
<b>UC4030A UC4051A</b>	16" / 40 cm	.050"	3/8"	531 492 656	91PX	A041	56	165202-6	419242-9	5/32"
<b>Specialty Chainsaws</b>										
<b>EY2650H25H</b>	10" / 25 cm	.050"	3/8"	196142-7	91PX	A218	39	165695-7	452093-7	5/32"
<b>EY401MP</b>	10" / 25 cm	.050"	3/8"	196142-7	91PX	A218	39	165695-7	452093-7	5/32"
<b>Gas Powered Chainsaws</b>										
<b>EA3201 EA3501, EA3601</b>	14" / 35 cm	.050"	3/8"	528 092 652	91PX	A041	52	165201-8	419288-5	5/32"
	16" / 40 cm	.050"	3/8"	531 492 656	91PX	A041	56	165202-6	419560-5	5/32"
<b>EA4300</b>	18" / 45 cm	.050"	.325"	512 484 672	95VP	K041	72	444 045 141	419560-5	3/16"
<b>DCS5121 EA5000</b>	18" / 45 cm	.058"	.325"	523 686 072 528 086 072	21LP	K095	72	443 045 661	952 020 640	3/16"
<b>EA5600</b>	18" / 45 cm	.058"	3/8"	523 099 064	73LP	K095	64	445 045 651	952 020 640	7/32"
<b>EA6100</b>	21" / 53 cm	.058"	3/8"	523 099 072	73LP	K095	72	443 053 651	952 020 650	7/32"
<b>DCS6421 EA7300 EA7900</b>	18" / 45 cm	.058"	3/8"	523 099 068	73LP	D009	68	445 045 655	952 020 640	7/32"
	20" / 50 cm	.058"	3/8"	523 099 072	73LP	D009	72	445 050 652 445 050 655	952 020 650	7/32"
	24" / 60 cm	.058"	3/8"	523 099 084	73LP	D009	84	445 060 652	952 020 660	7/32"
	28" / 70 cm	.058"	3/8"	523 099 092	73LP	D009	92	445 070 652	N/A	7/32"

Chainsaw Case

B-70777

Description

For Models

- Constructed from heavy duty ABS plastic
- Ideal for safe and secure storage and transportation of your Makita Chainsaw

EA3201SRDB  
EA3501SRDB  
EA3601FRDB  
EA4300FREC  
DCS5121REJ  
EA5600FREE


6" File Handle 953 004 010

42.4cc Chainsaw  
EA4300FREC



Chainsaw Files & File Sets

File Sets Includes File, Handle & Guide



Type	File Size	Part No.
Round	5/32"	<b>953 030 010</b>
	3/16"	<b>953 030 030</b>
	7/32"	<b>953 009 000</b>

File Sets Bulk 12 / Pk



Type	File Size	Part No.
Round	5/32"	<b>953 003 090</b>
	11/64"	<b>953 003 100</b>
	3/16"	<b>953 003 070</b>
	13/64"	<b>SD 13/64"</b>
	7/32"	<b>953 003 040</b>

# CHAINSAW ACCESSORIES

## 18" Rescue Cut Bar & Chain For Chainsaw EA7300



957 415 060

- Solid tungsten carbide teeth offer quick cutting ability in a variety of materials such as wood, shingles, metal (steel, aluminum, copper & alloys up to 3/64" thick), aerated concrete blocks, car bodies, railway cars and more!
- Features depth limiter for use when cutting blind ventilation holes
- Commonly used by rescue services, fire departments, contractors and more!
- Includes: chain bar, 18" rescue chain, depth limiter

## Oils & Lubricants



Qty.	Particulars	Item #
48	50:1 Synthetic 2 Cycle Oil (3.8 L / 1 Gallon Mix)	<b>T-00745C-48</b>
	50:1 Synthetic 2 Cycle Oil (9.5 L / 2.5 Gallon Mix)	<b>T-00739C-48</b>
6	50:1 - 2 Cycle Oil (200 ml / 6.8 fl. Oz.)	<b>181114-A6P</b>
48		<b>181114-ACS</b>
4	Heavy (Summer) Chain Oil (4 x 1 Gallon)	<b>181116-ACS2</b>
	Light (Winter) Chain Oil (4 x 1 Gallon)	<b>181120-ACS2</b>

## Safety Equipment

T-01703	FACE SHIELD	T-01638	T-01622	Chainsaw Safety Pants	MSP28-30	Size 28/30
<b>Safety Helmet Complete</b> Head, hearing & face protection	<b>Forestry Face Screen</b>	<b>Brush Guard Visor</b>	<b>Chain Saw Safety Chaps</b> One size fits all		<b>T-01650</b>	Size 32/34
					<b>T-01666</b>	Size 36/38
					<b>T-01672</b>	Size 40/42
					<b>MSP44-46</b>	Size 44/46





Split shaft attachments use a **quick release** accessory mounting system!







## SPLIT SHAFT UNIT ATTACHMENTS








	Straight Shaft Line Trimmer EM401MP	Straight Shaft Line Trimmer EM400MP (Large Guard) EM405MP (Small Guard)	Curved Shaft Line Trimmer ER400MP	Chainsaw EY401MP	Cultivator KR401MP	Edger EE400MP	Angle Hedge Trimmer EN401MP	Straight Hedge Trimmer EN410MP	Ground & Hedge Trimmer EN420MP	Extension Shaft LE400MP	Power Brush BR400MP	Power Sweep SW400MP
Split Shaft Attachment Features & Benefits	Straight shaft style preferred by professionals due to a longer reach  <i>Includes Parts for Brush Cutter. Blade Sold Separately</i>	Straight shaft style preferred by professionals due to a longer reach	Curved shaft style preferred for lighter weight and compact size	Ideal for pruning branches in hard to reach areas	Ideal for cultivating small garden beds and between existing rows of vegetables or flowers	Quickly and easily cuts through turf to define edge of garden beds, sidewalks, driveways and more	Ideal for trimming hard to reach hedges. 135° cutting radius for maximum versatility of operation	Ideal for trimming hard to reach areas of hedges and bushes	Compact and lightweight design ideal for trimming hedges and shrubs. Short cutting length enables effective trimming of grasses, climbing plants and small scrub brush	Enables operator to achieve added reach when used with Pole Hedge Trimmer Attachment (EN400MP) or Pole Chain Saw Attachment (EY401MP)	The power bristle brush attachment is an effective tool for removing debris from cracks and crevices of hard surfaces	Power Sweep paddle attachment cleans up dirt along roads and sidewalks, moves pebbles and sand in turf, as well as water and light snow along flat surfaces
Split Shaft Attachment Compatibility	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH	EX2650LH	EX2650LH	EX2650LH	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH DUX60Z
Split Shaft Attachment Specifications	Cutting Width: 16-1/2" (420 mm) Spindle Size / Thread: M10, Left Handed Overall Length: 34-1/2" (876 mm) Net Weight: 2.2 lbs (1.0 kg)	Cutting Width: 16-1/2" (420 mm) Spindle Size / Thread: M10, Left Handed Overall Length: 34-1/2" (876 mm) Net Weight: 2.2 lbs (1.0 kg) EM400MP 2.2 lbs (1.0 kg) EM405MP 2.8 lbs (1.3 kg)	Cutting Width: 16-1/2" (410 mm) Spindle Size / Thread: M8, Right Handed Overall Length: 27-3/4" (703 mm) Net Weight: 1.2 lbs (0.5 kg)	Guide Bar Length: 10" (255 mm) Chain Gauge: 0.043" (1.09 mm) Overall Length: 46" (117 cm) Net Weight: 2.4 lbs (1.1 kg)	Outer Blade Diameter: 9-1/8" (232 mm) Cultivating Width: 6-61/64" (160 mm) Overall Length: 38" (965 mm) Net Weight: 6.5 lbs (2.9 kg)	Blade Diameter: 8" (203 mm) Overall Length: 35-1/2" (889 mm) Net Weight: 5.4 lbs (2.4 kg)	Cutting Width: 21" (535 mm) Cutting Radius: 135° (90° / 45°) Shaft Length: 59" (150 cm) Net Weight: 5.4 lbs (2.4 kg)	Cutting Width: 19-1/4" (490 mm) Cutting Radius: 135° (90° / 45°) Shaft Length: 43-1/2" (110 cm) Net Weight: 4.5 lbs (2.0 kg)	Cutting Width: 9-7/8" (250 mm) Cutting Radius: 135° (90° / 45°) Shaft Length: 54-1/2" (138 cm) Net Weight: 5.5 lbs (2.5 kg)	Overall Length: 45" (114 cm) Net Weight: 2.5 lbs (1.13 kg)	Brush Diameter: 9-7/8" (250 mm) Brush Width: 23-5/8" (600 mm) Overall Length: 45" (114 cm) Net Weight: 13.9 lbs (6.3 kg)	Sweep Drum Diameter: 10-3/8" (265 mm) Sweep Drum Width: 23-1/4" (590 mm) Overall Length: 45" (114 cm) Net Weight: 15.8 lbs (7.2 kg)

# BRUSH CUTTER / LINE TRIMMER ACCESSORIES

Brush Cutter & Clearing Blades						Model No.		EBH253U	EBH341U
Model	Description	Diameter	Arbor Size	Teeth					
	<b>B-14118</b>	9"	1"	4 T					
	<b>385 224 140</b>	10"	20 mm						
	<b>B-14124</b>		1"						
	<b>195298-3</b>	9"	1"	3 T					
	<b>380 224 180</b>	8"	20 mm	8 T					
	<b>385 224 200</b>	10"							
	<b>B-14168</b>	10"	1"	80 T					

Trimmer Line 15 m			
<div></div> <p><i><b>Ideal for Cordless Line Trimmers</b></i></p> <div><div></div><div></div></div>			
Description	Length	Diameter	Part No.
Twist Line	50' (15 m)	0.080" (2 mm)	197472-9
Spiral Line		0.106" (2.7 mm)	198505-3
		0.094" (2.4 mm)	198501-1

Line Trimmer Heads													
	Line Trimmer Model (CC / LXT)	Thread Direction of Trimmer Spindle	Notes	EBH263U 24.5cc	EBH341L 33.5cc	EBH341U 33.5cc	DUR181Z 18V LXT	DUR182LZ 18V LXT	DUR187LZ 18V LXT	DUR364LZ 18Vx2 LXT	EBH341L 33.5cc	ER2600L 25.7cc	EM2600L 25.7cc
				LH	LH	LH		LH	LH	LH	LH	RH	LH
	<b>B-70275</b>	Auto	16" Cutting Width										
	<b>B-02945</b>												
	<b>6218020001</b>	Bump Feed	18" Cutting Width										
	<b>DA00000454</b>		17" Cutting Width										
	<b>196324-1</b>		16-1/2" Cutting Width										
	<b>122980-1</b>		16-1/8" Cutting Width										
	<b>126048-5</b>		16" Cutting Width										
	<b>B-05131</b>		14" Cutting Width										
	<b>197297-1</b>		15-3/4" Cutting Width										
	<b>DA00000655</b>		11-3/4" Cutting Width										
	<b>195149-0</b>		10-1/4" Cutting Width										
	<b>198385-7</b>												
	<b>195858-1</b>	Manual	18" Cutting Width										
	<b>196146-9</b>												
<b>B-02951</b>	<b>B-02951</b>	Manual	18" Cutting Width										

Blower Accessories			
	Description	For Model No.	Part No.
	16" Long Nozzle	DUB362	<b>455915-0</b>
	11" Extension Nozzle		<b>456957-7</b>
	11" Flat Nozzle		<b>456958-5</b>
	12" Flat Nozzle	BHX2500CA	<b>451753-8</b>
	21" Long Curved Nozzles	DUB361	<b>452123-4</b>
		DUB182, DUB183	<b>TP00000199</b>




Shoulder Strap



Chest Harness

Brush Cutter, Line Trimmer & Blower Chest Harnesses & Shoulder Straps														
Brushcutter, Trimmer & Blower Model		EBH253U	EBH341U	DUB362Z	HXU032X2	DUR181Z	DUR182LZ	DUR364LZ	EBH341L	EM2600L	ER2600L	EBH253L	EX2650LH	ER2550LH
Model														
6247001001	Chest Harness	•	•		•									
122906-3		•	•		•									
125516-5	Shoulder Strap				•	•	•	•	•	•	•	•	•	•
126012-6					•	•	•	•	•	•	•	•	•	•
166094-6				•										

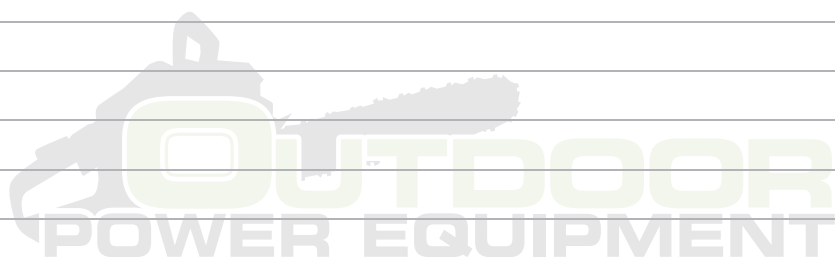

## Makita Canada **Order Desk & Distribution Centres**

### **Western Canada**

**Phone: 604 272-3104**

**Toll Free Phone: 1 800 663-0909**

**Toll Free Fax: 1 800 667-7078**

Email: [orderdeskmcv@makita.ca](mailto:orderdeskmcv@makita.ca)

### **Central, Québec & Eastern Canada**

**BILINGUAL SERVICE**

**Phone: 905 571-2200**

**Toll Free Phone: 1 800 263-3734**

**Toll Free Fax: 1 800 565-0906**

Email (English): [orderdeskmct@makita.ca](mailto:orderdeskmct@makita.ca)

Email (Français): [orderdeskmcq@makita.ca](mailto:orderdeskmcq@makita.ca)

## **Factory Service Centres**

### **13 Locations From Coast To Coast**

#### **Richmond / Vancouver**

11771 Hammersmith Way,  
Richmond, BC. V7A 5H6

**Phone: 604 272-3104**

**Toll Free: 1 800 663-0909**

**Fax: 604 272-5416**

#### **Burnaby / Vancouver**

2288 Holdom Avenue,  
Burnaby, BC. V5B 4Y5

**Phone: 604 291-1511**

**Toll Free: 1 877 295-1511**

**Fax: 604 291-1599**

#### **Calgary**

#8 - 6115 4th Street SE,  
Calgary, AB. T2H 2H9

**Phone: 403 243-3995**

**Toll Free: 1 800 267-0445**

**Fax: 403 287-3044**

#### **Edmonton**

11614 - 149 Street NW,  
Edmonton, AB. T5M 3R3

**Phone: 780 455-6644**

**Toll Free: 1 888 455-6644**

**Fax: 780 451-4877**

#### **Saskatoon**

206A - 2750 Faithful Avenue,  
Saskatoon, SK. S7K 6M6

**Phone: 306 931-0111**

**Toll Free: 1 888 931-0111**

**Fax: 306 931-4574**

#### **Winnipeg**

1670 St. James Street,  
Winnipeg, MB. R3H 0L3

**Phone: 204 694-0402**

**Toll Free: 1 800 550-5073**

**Fax: 204 694-5782**

#### **London**

317 Adelaide Street S. Unit 117,  
London, ON. N5Z 3L3

**Phone: 519 686-3115**

**Toll Free: 1 800 571-0899**

**Fax: 519 686-4347**

#### **Mississauga / Toronto**

6350 Tomken Road Unit 8,  
Mississauga, ON. L5T 1Y3

**Phone: 905 670-7255**

**Toll Free: 1 888 221-9811**

**Fax: 905 670-0120**

#### **Whitby / Toronto**

1950 Forbes Street,  
Whitby, ON. L1N 7B7

**Phone: 905 571-2200**

**Toll Free: 1 800 263-3734**

**Fax: 1 800 867-1683**



### **Makita Canada Head Office & Distribution Centre**



#### **Ottawa / Nepean**

210 Colonnade Road, Unit 11,  
Ottawa, ON. K2E 7L5

**Phone: 613 224-5022**

**Toll Free: 1 888 560-2214**

**Fax: 613 224-2360**

#### **Montreal / St. Leonard**

6389 Boulevard Couture,  
St. Leonard, QC. H1P 3J5

**Phone: 514 323-1223**

**Toll Free: 1 800 361-7049**

**Fax: 1 800 561-5953**

#### **Québec City / Les Saules**

1200 St. Jean Baptiste Unit 106,  
Québec, QC. G2E 5E8

**Phone: 418 871-5720**

**Toll Free: 1 800 663-5757**

**Fax: 418 871-6684**

#### **Dartmouth / Halifax**

204 Brownlow Avenue, Unit #145,  
Dartmouth, NS. B3B 0M4

**Phone: 902 468-7064**

**Toll Free: 1 888 625-4821**

**Fax: 902 468-3551**



**Follow Us!  
@makita.ca**

**When QUALITY & SERVICE Counts  
Choose Makita**

**makita.ca**

Printed in Canada 2019vr1

