



Angle Grinders

Satisfy Professional's Needs

9564P 4-1/2" (115 mm) / 9564PCV 4-1/2" (115 mm) Variable Speed
9564PC 4-1/2" (115 mm) / 9565PCV 5" (125 mm) Variable Speed



ON

Easy-to-operate

PADDLE TYPE SWITCH



The power can be
turned off as soon as
you release the hand!

OFF

Photo : 9565PCV Depressed center wheel and Anti-vibration grip are option.

Durable motor with high heat resistance

High power & Heavy-Duty motor

Field with superior wiring technology leads to higher wattage without motor-size expansion.
The successors inherit slim body, zigzag varnish-coating on armature and powder varnish-coating on field from the predecessors.





Photo: 9564P

Toolless Wheel Cover

More Durable Gears and Bearings

- Gears are lubricated by securely sealed grease in gear room.
- Bearings are protected from dust/dirt by Labyrinth construction.

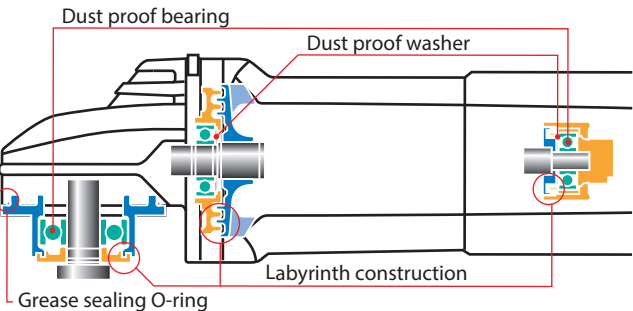

Easy-to-operate paddle type on/off switch

- Can be easily controlled by the hand gripping the machine.
- With non-slip pattern on the surface of paddle lever for easy on-off control
- The lock-off button is positioned in the center of the paddle lever so that it is operable no matter what portion of the lever is gripped.



Angle Grinders 9564P / 9564PC / 9564PCV / 9565PCV

Double Insulation

9564P / 9564PC / 9564PCV			9565PCV
Maximum Capacities		Maximum Capacities	
Grinding Wheel	4-1/2" (115 mm)	Grinding Wheel	5" (125 mm)
Sanding Disc	4-1/2" (115 mm)	Sanding Disc	5" (125 mm)
Wire Cup Brush	3-1/2" (90 mm)	Diamond Wheel	5" (125 mm)
Spindle Thread	5/8" - 11 UNC	Wire Brush	3-1/2" (90 mm)
No Load Speed	9564P: 11,900 RPM	Spindle Thread	5/8" - 11 UNC
	9564PCV: 2,800 - 10,500 RPM	No Load Speed	2,800 - 10,500 RPM
AMPS (120V)	9564P: 10.0 A 9564PCV: 13.0 A	AMPS (120V)	13.0 A
Overall Length	12-1/8" (307 mm)	Overall Length	12-1/8" (307 mm)

9564P Standard Equipment: Side Handle(153489-2), Lock Nut Wrench 28 (782424-9),Toolless Wheel Cover (123144-0), Inner Flange (224399-1), Lock Nut 5/8-45 (224568-4)

9564PC Standard Equipment: 4-1/2" Depressed Center Wheel (1 Ea. A-95956-25), Side Handle(153489-2), Lock Nut Wrench 28 (782424-9),Toolless Wheel Cover (123144-0), Inner Flange (224399-1), Lock Nut 5/8-45 (224568-4)

9564PCV Standard Equipment: 4-1/2" Depressed Center Wheel (1 Ea. A-95956-25), Side Handle(158237-4), Lock Nut Wrench 28 (782424-9),Toolless Wheel Cover (123144-0), Inner Flange (224399-1), Lock Nut 5/8-45 (224568-4)

9565PCV Standard Equipment: 5" Depressed Center Wheel (1 Ea. A-95962-25), Side Handle (158237-4), Lock Nut Wrench 28(782424-9), Wheel Cover (123145-8), Inner Flange (224399-1), Lock Nut 5/8-45(224568-4)