



■ Performance Comparison

Note: 1. The test results depend to a great extent on the hardness of materials, etc.
2. The numbers in the bar graphs are relative values when the capacity of **Competitor "F"** is indexed at 100.


Test material:
Each model was tested by sanding SPF timber continuously for 15 minutes under the following conditions: Loaded with a 3kg weight Using the same #120 abrasive paper And measured the amount removed.

Sanding Efficiency

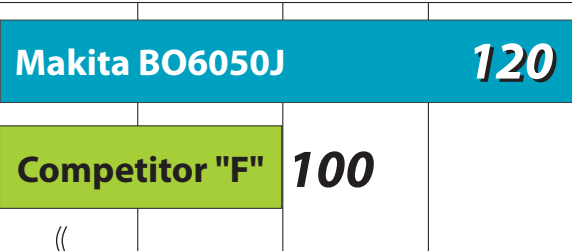

Rubber pad

(hook & loop type)

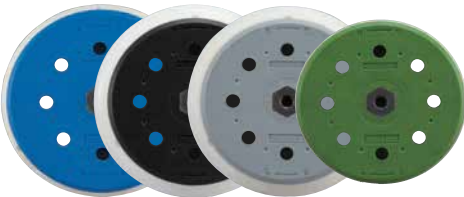

Size	Type	Part No.
150mm	Hard (For coarse sanding)	197315-5
	Soft (For general sanding)	197314-7
	Super Soft (For fine sanding)	197316-3
130mm	Hard (For polishing)	197317-1

Wool pad

(Hook & loop type)

(For high gloss polishing)



Size (mm)	Part No.
150	794619-2

Felt pad

(Hook & loop type)

(For removing wax)



Size (mm)	Part No.
150	193288-0

■ Accessories

Random Orbit Abrasive Paper				
Diameter	Style	Grit	For Model(s)	10 / Pk
6"	Hook & Loop 15 Holes For Wood	40	BO6050J	B-51415
		60		B-51421
		80		B-51437
		100		B-51443
		120		B-51459
		180		B-51465
		240		B-51471
		320		B-51487
	Hook & Loop 15 Holes For Paint	400		B-51493
		40		B-51502
		60		B-51518
		80		B-51524
		100		B-51530
		120		B-51546
		180		B-51552
		240		B-51568
		320		B-51574
		400		B-51580

Abrasive disc

(hook & loop type)

*For wood

**For multi-purposes



Disc dia. (mm)	Grit	Per pkg.	Part No.
150	*WA40	10	794607-9
150	*WA60	10	794608-7
150	*WA80	10	794609-5
150	*WA120	10	794610-0
150	*WA180	10	794611-8
150	*WA240	10	794612-6
150	*WA400	10	794613-4

Random Orbit Sander		BO6050J 6" (150 mm) 325
Double Insulation	Double Insulation	Pad Diameter 6" (150 mm)
Variable Speed	Dust Collecting	Abrasive Disc Diameter 6" (150 mm)
Constant Speed	Carrying Case	Orbits Per Minute 1,600 - 6,800 OPM
Soft Start		Amount of Eccentricity 7/32" (5.5 mm)
		AMPS (120V) 6.6 A
		Overall Height 5-3/34" (145 mm)
		Overall Length 13" (330 mm)
		Cord Length 8.2 ft. (2.5 m)



Random Orbit Sander
BO6050J 6" (150 mm)

6" (150 mm)
Random Orbit Sander



Excellent
operability



When QUALITY & SERVICE COUNTS – Choose Makita
makita.ca

Ergonomically designed palm design with Soft grip

fits your palm perfectly to provide maximum comfort and control especially in horizontal applications and chamfering, while minimizing hand fatigue and pain.




Two sanding modes

1. Random orbit mode

for finish sanding and buffing:

The motion of the pad is orbital action plus weak free-rotation, and can be stopped by exerting much hand pressure on the machine.



2. Roto-orbit mode

for coarse sanding and polishing:

The motion of the pad is a combination of orbital action and aggressive forced rotation.



Slim skirt

provides higher work efficiency in tight spaces.

BO6050J



Change lever protection system

When the switch is slid to ON position, change lever is automatically locked for protection from damage caused by rotating armature.



Slim barrel grip



Constant speed control

minimizes reduction in rotation speed under load, increasing operation efficiency.



Variable speed control dial

located on the rear side for easier operation



Toolless pad change

enables quick pad change to suit application.



Pad protector

for protection of the machine, workpiece and operation when sanding in corners or tight spaces (pad protector: also available as a standard equipment)



New dust nozzle

- Located beneath the rear end of the machine to increase the maneuverability of the machine
- The outlet is corrugated to prevent front cuffs 24 from slipping off.
- Easy to attach and detach without tools

