

LED job light (DJR360, DJR187)



Retractable rafter hook (DJR360, DJR187)



BL MOTOR
Brushless DC motor
(DJR360, DJR187)

Electronic 2-speed
(DJR360, DJR187)

Two-finger switch trigger

Soft grip
provides more comfort and control.

Electric brake


18V LITHIUM-ION

Toolless blade change
Redesign of Blade clamp makes it easier to remove a blade.

Photo : DJR187

Toolless shoe adjustment (DJR360, DJR187)

Lever system is employed instead of button system.
It prevents the blade lock from unintentional releasing.



DJR360 : Two 18V Li-ion batteries can be directly installed on the machine to supply energy to the powerful 36V DC motor drive system.

Powered by 18V Li-ion Batteries

with Battery Fuel Gauge

BL1860B : 6.0 Ah
BL1850B : 5.0 Ah
BL1840B : 4.0 Ah
BL1830 : 3.0 Ah



BL1850B



BL1815N

Rapid Charger
DC18RC



Rapid Charger
Dual Port
Rapid Charger
DC18RD



Standard Charger
DC18SD




*BL1815N : Compact
(*without Battery fuel gauge)

Efficiency of Metal Cutting

Note: 1. Numbers in the charts below are relative values when the capacities of Competitor "M" at 100.
2. The test results depend to a great extent on the hardness of materials, etc.

Test material: ø1" Carbon steel pipe 25A

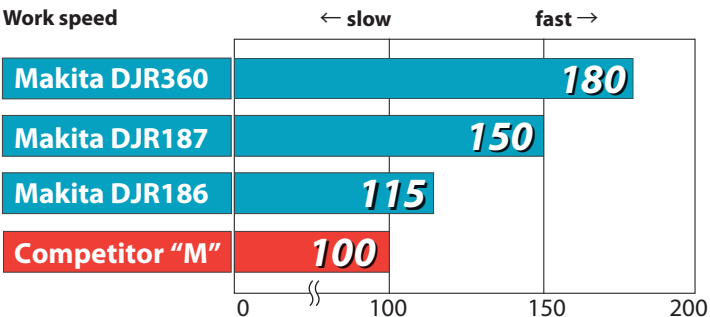

Cordless Recipro Saw

DJR360 / DJR187 / DJR186

Variable Speed	DJR360Z
Electronic 2-speed (DJR360, DJR187)	Two 18V Li-Ion
Brake	Pipe: 5-1/8" (130 mm)
Built-in Job Light (DJR360, DJR187)	Wood (11-3/4" Blade): 10" (255 mm)
Carrying Case	High 0 - 3,000 SPM
	Low 0 - 2,300 SPM
	Length of Stroke 1-1/4" (32 mm)
	Overall Length 17-3/4" (449 mm)

	DJR187Z	DJR186RME / Z
Battery Capacities	18V Li-Ion	18V Li-Ion
Maximum Cutting Capacities:	Pipe: 5-1/8" (130 mm)	Pipe: 5-1/8" (130 mm)
Strokes Per Minute	Wood (11-3/4" Blade): 10" (255 mm)	Wood (11-3/4" Blade): 10" (255 mm)
Length of Stroke	High: 0 - 3,000 SPM	0 - 2,800 SPM
Overall Length	Low: 0 - 2,300 SPM	
	1-1/4" (32 mm)	1-1/4" (32 mm)
	17-1/4" (439 mm)	19-1/8" (486 mm)



18V LXT
Reciprocating Saws



High power and High durability



DJR360Z



DJR187Z



DJR186RME / Z



When QUALITY & SERVICE COUNT – Choose Makita
makita.ca



Photo: DJR187

Newly designed vertical crank mechanism


And featuring high output Brushless DC motor, enabling outstanding performance in cutting work.

(DJR360, DJR187)




Photo: DJR360

Smooth cutting with new crank system

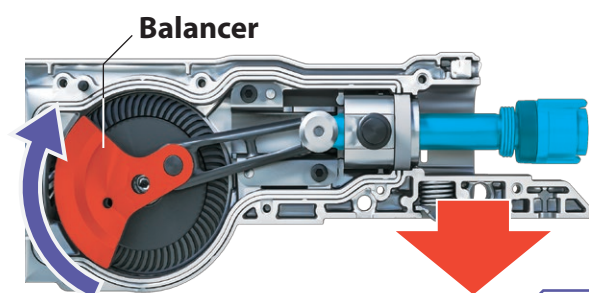

The rolling of Balancer decreases and materials are pushed stronger

Backward stroke is faster

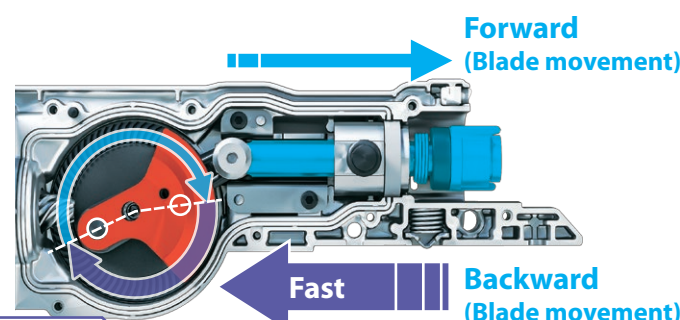

Backward rotating angle is less.

Cutting speed
approx **TWICE**
as fast as the 18Vx1 predecessor model when cutting a 25A(ø1") pipe with DJR360.

Long Stroke

32mm

High Speed
Strokes per minute
3,000min⁻¹
(DJR360, DJR187)

High durability

More durable mechanism to hold slider

A roller on the rear end of slider reciprocates on the rail of metal plate, providing higher durability than the current mechanism using plane bearing as the rear slider holder.

Mechanical durability
more than **twice**

More rigid shoe

- Shoe has been reinforced.
- Fixed type shoe is used for added durability.



XPT
EXTREME PROTECTION TECHNOLOGY

