



1" Rotary Hammer HR2475


Satisfy Professional's Needs



Adapted for
SDS-PLUS bits


DRASTICALLY ENHANCED DURABILITY

Hi-Spec
Combination
Hammer

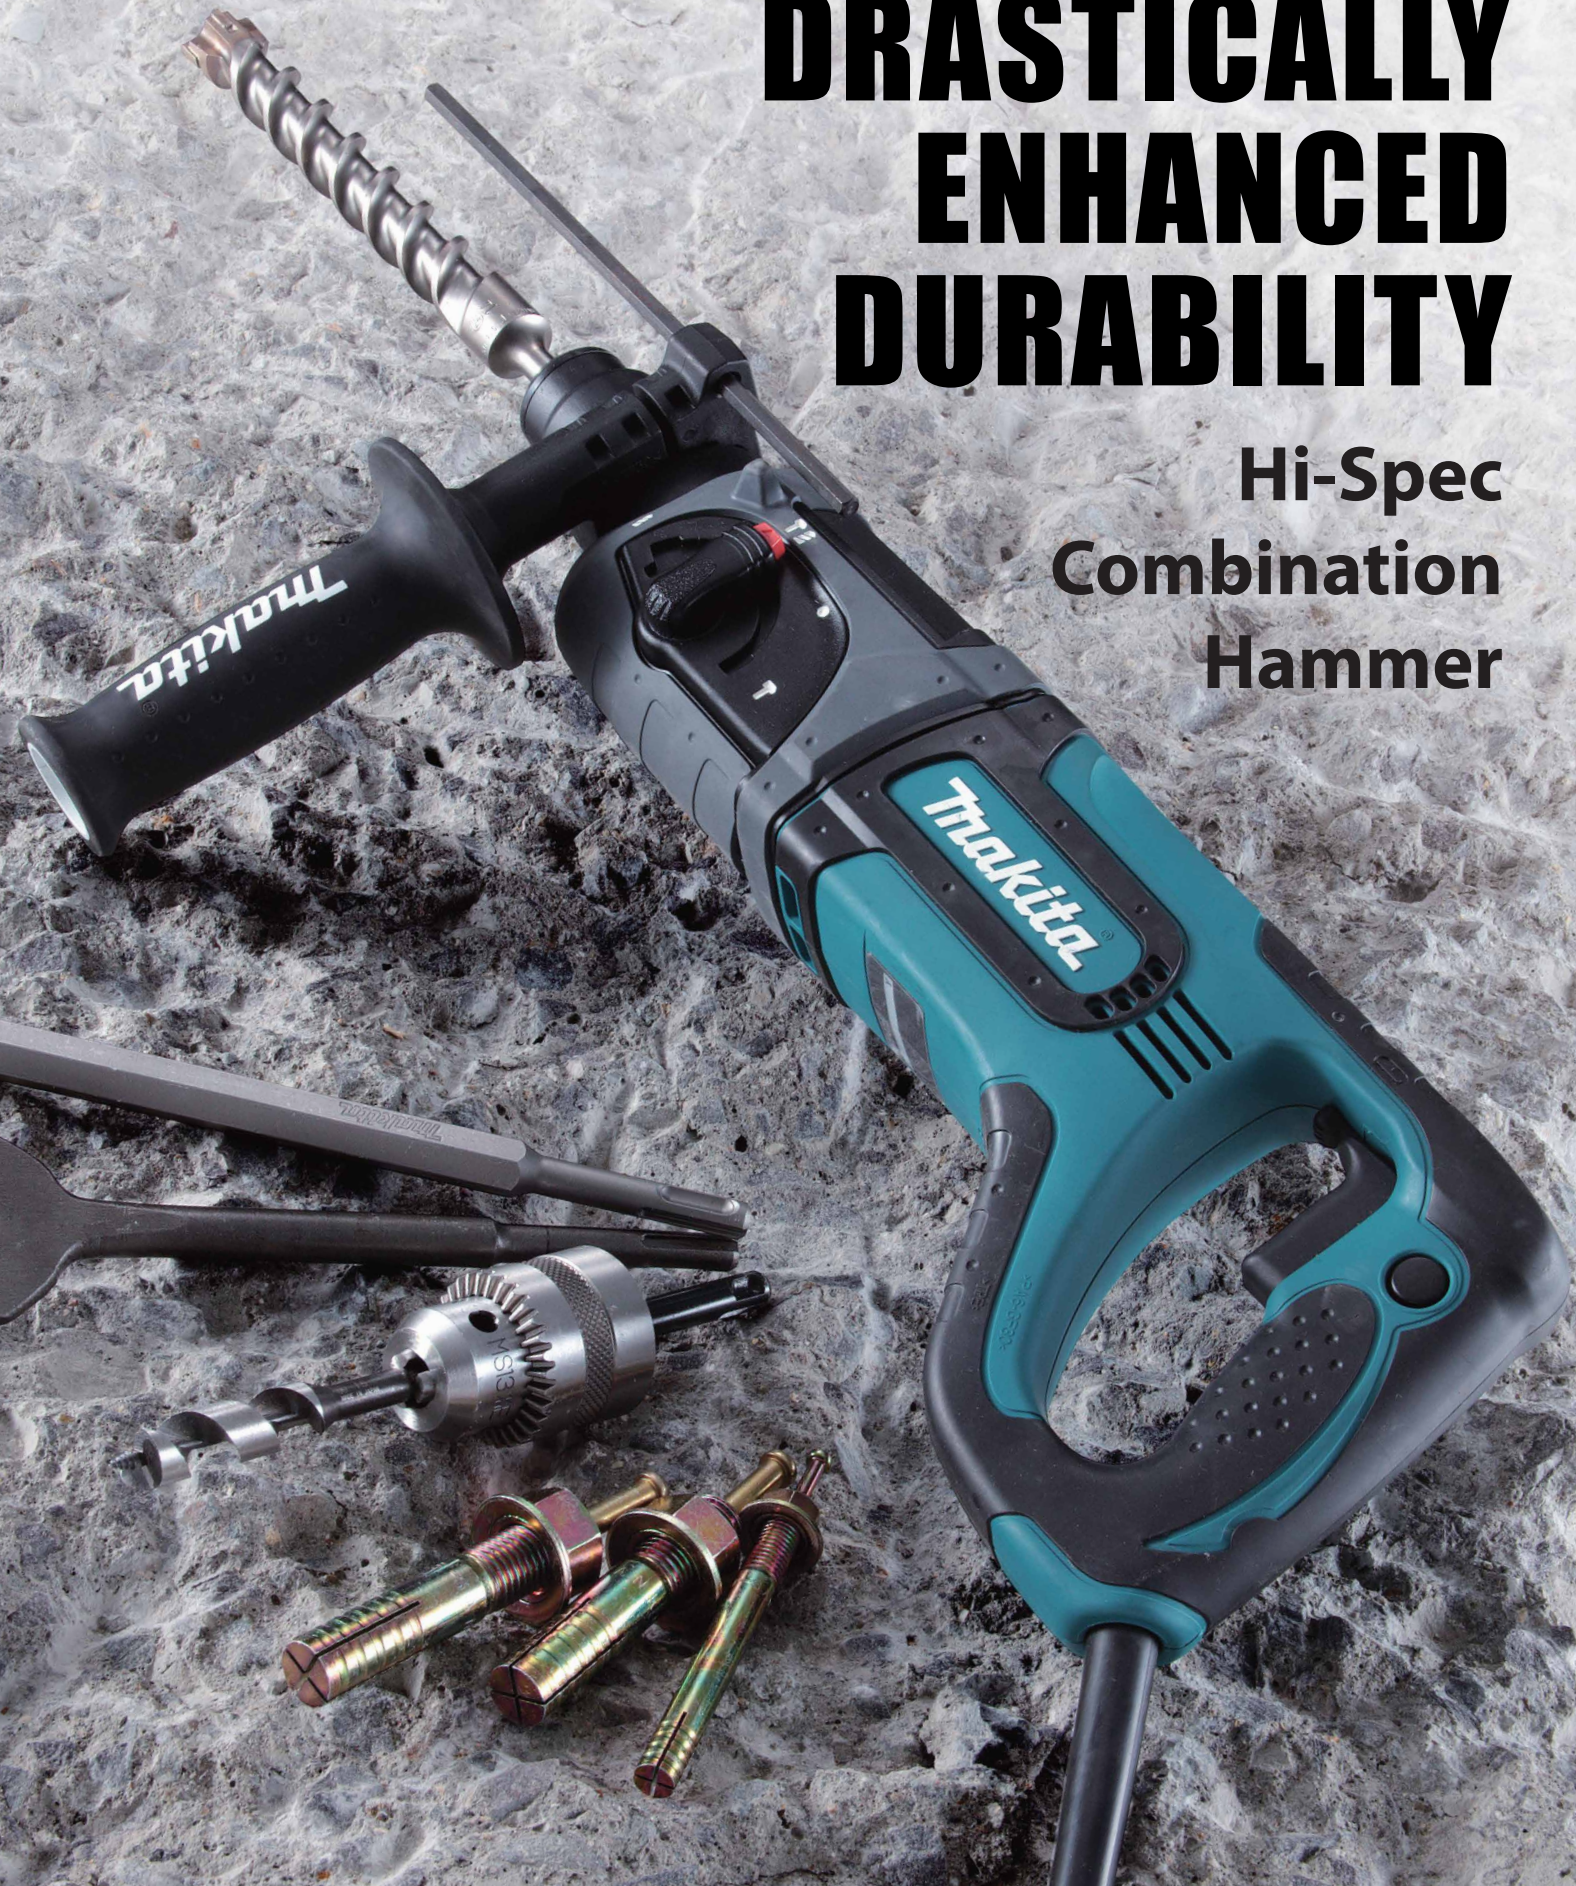

HIGH DURABILITY

- Added durability to impact bolt
- Large seal ring eliminates grease leakage from matching surface between inner housing and gear housing.
- Varnish on armature protects from dust and wire-breakage.

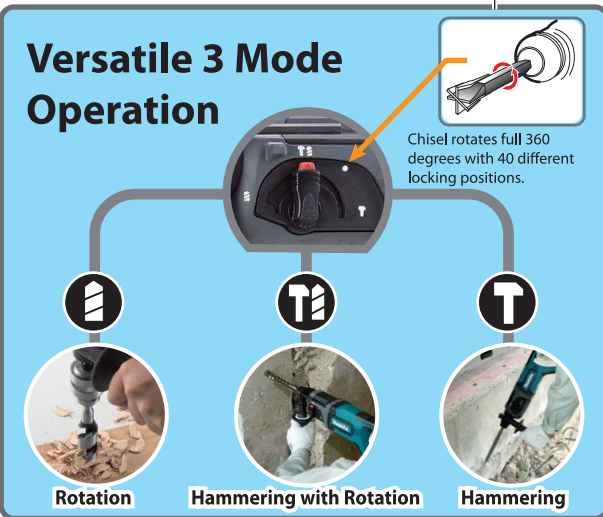

Accessories

Dust cup set
Part No. 194580-7
Use with Grip base set
Part No. 194582-3



Dust cup
Bit dia 6-14.5 mm
Part No. 421342-3
Bit dia 12-16 mm
Part No. 421664-1



(Protects operator from dust and debris)

Drill chuck assembly (13 mm)
Part No. 122574-2
Use with Chuck key (Part No.763432-9)



Keyless drill chuck assembly (13 mm)
Part No. 122823-7



1" Rotary Hammer

- Double Insulation
- Variable Speed
- Reversing
- Torque Limiter
- Dust Collecting
- SDS-PLUS Shank
- Carrying Case



HR2475

419 mm

Bit Type	SDS-PLUS
Maximum Capacities	Concrete: 1" (25 mm) Steel: 1/2" (13 mm) Wood: 1-1/4" (32 mm)
Impact Energy	2.7 J (2.0 ft. lbs.)
AMPS (120V)	7.0 A
No Load Speed	0 - 1,100 RPM
Blows Per Minute	0 - 4,500 BPM
Overall Length	16-7/8" (429 mm)
Net Weight	6.6 lbs. (3.0 kg)

Standard Equipment: Side Handle (158057-6), Depth Gauge (324219-0), Plastic Carrying Case (824695-3)

When QUALITY & SERVICE COUNTS – Choose Makita

makita.ca