





# OVER 100 YEARS OF INNOVATION


**Makita Corporation was founded in 1915 as an electric motor sales and repair company. Today, as a global brand in over 40 countries, Makita is an innovation leader, manufacturing best-in-class products at 10 plants operating in 8 countries.**



**1978** Introduced the first cordless tool




**2005** Created 18V LXT System

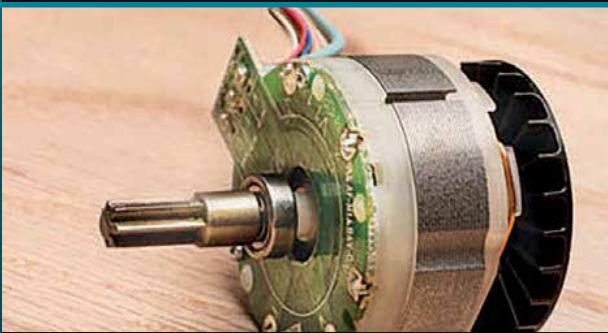


**2009** Introduced the industry's first 18V Brushless Motor Impact Driver



**2012** Released the first cordless tool powered by two 18V LXT Batteries

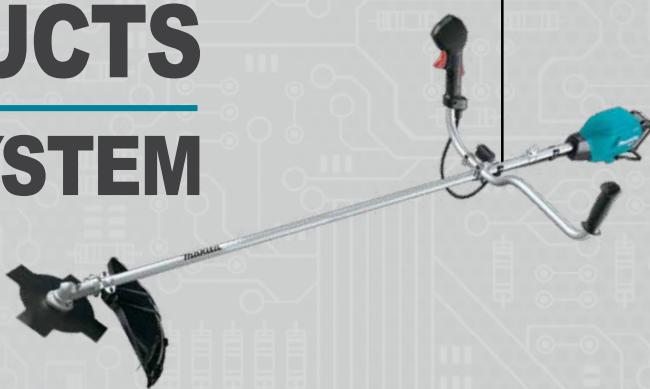**XGT****40V | 80V max****BEYOND LIMITS**Learn more at [makita.ca](http://makita.ca) > XGT**40Vmax****80Vmax  
(40Vx2)****100+  
PRODUCTS  
ONE SYSTEM****LXT 18V | 36V****18V****36V  
(18Vx2)****320+ PRODUCTS****ONE SYSTEM. ENDLESS POSSIBILITIES.**

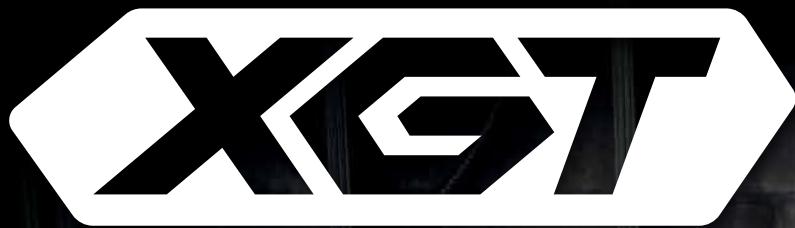

B E Y O N D L I M I T S



**OUTPOWER**





**OUTSMART**



**OUTLAST**



**XGT is a 40V | 80V max system of cordless equipment and tools. XGT outpowers, outsmarts, and outlasts the rest. Through Makita's innovative engineering, the technology within the XGT system will create the equipment and tools of the future.**

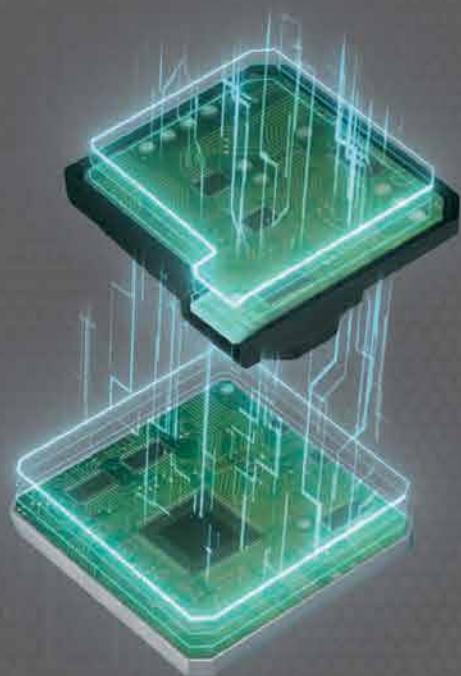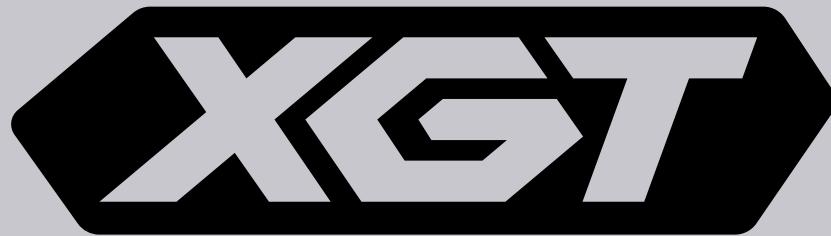

## OUTPOWER

### PURE COPPER WIRE

Makita XGT Products feature purpose-built Brushless Motors with more copper windings for increased power output.

### RARE EARTH MAGNETS

Rare earth magnets of the highest quality are engineered within the Brushless Motors to maximize power and performance.

## OUTSMART

### BUILT-IN MICROCHIPS

Built-in microchips in both tool and battery allow for real-time digital communication, actively monitoring heat, overload, and over-discharge.

### DIGITAL COMMUNICATION

Digital communication between XGT Tools and Batteries through enhanced digital communication technology optimize performance to deliver up to 2X longer sustained power during demanding applications.

# B E Y O N D L I M I T S

Learn more at [makita.ca](http://makita.ca) > XGT



## OUTLAST

### IMPACT ABSORBENT STRUCTURE

Durable outer casing and cell holder create space within the battery to absorb impact.

### WATER & DUST RESISTANCE

Water and dust-resistant triple layer structure and an enhanced terminal structure are engineered to protect against water and dust for any job site condition.

### MULTI-LAYER SURFACE CONTACTS

Multi-layer surface contacts within tool and battery are designed to take on high current demands.

### RAPID OPTIMUM CHARGING SYSTEM

XGT Charger and Dual Cooling Fans digitally communicates before and during the charging process, evaluating battery condition to deliver a consistent fast charge. Charges LXT batteries with adapter.

**26 lbs SDS-MAX Demolition Hammer w/AWS**
**XGT** 40V | 80V<sub>max</sub>
**HM002GZ03**
**Heavy Duty Chipping Efficiency with Maximum Power and Runtime**
**SDS-MAX Shank**

- Constant speed control maintains constant speed under heavy load
- Soft start feature gradually increases speed to eliminate start up shock
- 5-stage variable speed dial and variable speed trigger allow operator to adjust speed based on materials or application
- Soft no-load motor suppression limits vibration and bit deflection when idling
- Slide style on/off switch for easy continuous use applications
- 12 angle bit positions enable chisels to be positioned at optimum angle of operation
- One-touch sliding chuck for easy bit installation and removal


**Variable Speed, Constant Speed Control, Soft Start, LED Job Light**
**SPECIFICATIONS**

Battery Capacities	Two 40V max XGT
Bit Type	SDS-MAX
Blows Per Minute	950 - 1,900 BPM
Impact Energy (EPTA)	20.9 J (15.4 ft. lbs)
Overall Length	22-5/8" (574 mm)
Net Weight	23.50 lbs (10.6 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AFT AVT AWS**

**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. SDS-MAX Bull Point (751423-A), D-Style Side Handle (135269-8), Cleaning Cloth (443122-7), Bit Grease (194683-7), Plastic Carrying Case (821848-5)

**2" Rotary Hammer w/AWS**
**XGT** 40V | 80V<sub>max</sub>
**NEW HR006GM203**
**HR006GZ**
**Increased Impact Energy With Low Vibration To Replace AC Rotary Hammers**
**Rotation + Hammer / Hammer Only**
**SDS-MAX Shank**

- Trigger-lock button prevents accidental start-up for increased safety
- Torque limiter stops bit rotation if bit jams for increased operator safety and tool protection
- Soft no-load motor suppression limits vibration and bit deflection when idling
- Variable speed dial and trigger


**SPECIFICATIONS**

Battery Capacities	Two 40V max XGT
<b>Capacities:</b>	
Concrete (TCT)	2-1/16" (52 mm)
Concrete (Core Bit)	6-5/16" (160 mm)
Impact Energy (EPTA)	21.4 J (15.8 ft. lbs)
No Load Speed	150 - 310 RPM
Blows Per Minute	1,100 - 2,250 BPM
Overall Length	22-5/8" (610 mm)
Net Weight	25.8 lbs (11.7 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AFT AVT AWS**

**STANDARD EQUIPMENT INCLUDES:**

HR006GM203: Two 40V max XGT Batteries (4.0Ah) BL4040, Rapid Charger (DC40RA), Straight Side Handle (135629-4), D-Style Side Handle (135283-4), Cleaning Cloth (443122-7), Bit Grease (194683-7), Depth Gauge (331955-1), Plastic Carrying Case

HR006GZ: Tool Only. Batteries and Charger Sold Separately. Straight Side Handle (135629-4), D-Style Side Handle (135283-4), Cleaning Cloth (443122-7), Bit Grease (194683-7), Depth Gauge (331955-1), Plastic Carrying Case (821848-5)

**1-3/16" Rotary Hammer w/AWS**
**XGT** 40V | 80V<sub>max</sub>
**HR008GM202**
**HR008GZ05**
**Use With Auto-Start Wireless System (AWS) Dust Extractors OR Onboard DX10 Dust Extraction System**
**SDS-PLUS Shank / Hammer & Rotation / Hammer Only / Rotation Only**

- Constant speed control maintains speed under heavy load
- Anti-restart feature prevents accidental start up of tool during battery changing when switch is locked in the on position

**Variable Speed, Reversible, Constant Speed Control, Electric Brake, Anti-Restart**


Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AFT AVT HEPA AWS**

**STANDARD EQUIPMENT INCLUDES:**

HR008GM202: Two 40V max XGT Batteries (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), Side Handle (126882-3), Cleaning Cloth (443122-7), Bit Grease (194683-7), Depth Gauge (331886-4), Dust Extraction System (DX10), Plastic Carrying Case

HR008GZ05: Tool Only. Batteries and Charger Sold Separately. Side Handle (126882-3), Bit Grease (194683-7), Depth Gauge (331886-4) Dust Extraction System (DX10)

**13 lbs SDS-MAX Demolition Hammer w/AWS**
**XGT** 40V | 80V<sub>max</sub>
**HM001GM202**
**HM001GZ**
**High Chipping Efficiency with Low Vibration and Compact Design**
**SDS-MAX Shank**

- Constant speed control maintains constant speed under heavy load
- Soft start feature gradually increases speed to eliminate start up shock
- 5-stage variable speed dial and variable speed trigger allow operator to adjust speed based on materials or application
- Soft no-load motor suppression limits vibration and bit deflection when idling
- Slide style on/off switch for easy continuous use applications


**Variable Speed, Constant Speed Control, Soft Start, LED Job Light**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Bit Type	SDS-MAX
Blows Per Minute	0 - 2,650 BPM
Impact Energy (EPTA)	9.4 J (6.9 ft. lbs)
Overall Length	19-1/2" (496 mm)
Net Weight	12.8 lbs (5.8 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AFT AVT AWS**

**STANDARD EQUIPMENT INCLUDES:**

HM001GM202: Two 40V max XGT Batteries (4.0Ah) BL4040, Rapid Charger (DC40RA), Side Handle (135332-7), Bit Grease (194683-7), Cleaning Cloth (443122-7), Plastic Carrying Case (821838-8), Battery Cover (412393-7)

HM001GZ: Tool Only. Batteries and Charger Sold Separately. Side Handle (135332-7), Bit Grease (194683-7), Cleaning Cloth (443122-7)

**1-9/16" Rotary Hammer w/AWS**
**XGT** 40V | 80V<sub>max</sub>
**HR005GZ**
**Heavy Duty Performance**
**Rotation + Hammer / Hammer Only**
**SDS-MAX Shank**

- Trigger-lock button prevents accidental start-up for increased safety
- Torque limiter stops bit rotation if bit jams for increased operator safety and tool protection
- Soft no-load motor suppression limits vibration and bit deflection when idling
- Variable speed dial and trigger allows operator to adjust speed based on materials or application
- One-touch SDS-MAX sliding chuck for easy bit installation and removal


**SPECIFICATIONS**

Battery Capacities	40V max XGT
<b>Capacities:</b>	
Concrete (TCT)	1-9/16" (40 mm)
Concrete (Core Bit)	4-1/8" (105 mm)
Impact Energy (EPTA)	8.0 J (5.9 ft. lbs)
No Load Speed	250 - 500 RPM
Blows Per Minute	1,450 - 2,900 BPM
Overall Length	19-3/4" (500 mm)
Net Weight	14.7 lbs (6.7 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AFT AVT AWS**

**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. Straight Side Handle (123138-5), D-Style Side Handle (196792-8), Depth Gauge (331955-1), Cleaning Cloth (443122-7), Bit Grease (194683-7), Plastic Carrying Case

**1-1/8" Rotary Hammer w/AWS**
**XGT** 40V | 80V<sub>max</sub>
**HR001GM101**
**HR001GZ**
**Heavy Duty Performance**
**Rotation Only / Rotation + Hammer / Hammer Only**
**SDS-PLUS Shank**

- Trigger-lock button prevents accidental start-up for increased safety
- Torque limiter stops bit rotation if bit jams for increased operator safety and tool protection
- No-load motor suppression limits vibration and bit
- Variable speed dial and trigger allows operator to adjust speed based on materials or application


**SPECIFICATIONS**

Battery Capacities	40V max XGT
<b>Capacities:</b>	
Concrete	1-1/8" (28 mm)
Steel	1/2" (13 mm)
Wood	1-1/4" (32 mm)
Impact Energy (EPTA)	3.2 J (2.4 ft. lbs)
No Load Speed	0 - 980 RPM
Blows Per Minute	0 - 5,000 BPM
Overall Length	14-1/8" (358 mm)
Net Weight	9.3 lbs (4.2 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AFT AVT AWS**

**STANDARD EQUIPMENT INCLUDES:**

HR001GM101: 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), Side Handle (126882-3), Cleaning Cloth (443122-7), Bit Grease (194683-7), Depth Gauge (331886-4), Hook (191C37-7), Plastic Carrying Case (821815-0)

HR001GZ: Tool Only. Batteries and Charger Sold Separately. Side Handle (126882-3), Cleaning Cloth (443122-7), Bit Grease (194683-7), Depth Gauge (331886-4), Hook (191C37-7)

**1-1/8" Rotary Hammer****HR003GM102**  **HR003GZ****Heavy Duty Performance****Rotation Only / Rotation + Hammer / Hammer Only**  
**SDS-PLUS Shank**

- Trigger-lock button prevents accidental start-up for increased safety
- Torque limiter stops bit rotation if bit jams for increased operator safety and tool protection
- No-load motor suppression limits vibration and bit
- Variable speed dial and trigger allows operator to adjust speed based on materials or application

**Variable Speed****SPECIFICATIONS**

Battery Capacities	40V max XGT
Capacities:	
Concrete	1-1/8" (28 mm)
Steel	1/2" (13 mm)
Wood	1-1/4" (32 mm)
Impact Energy	3.2 J (2.4 ft. lbs)
No Load Speed	0 - 980 RPM
Blows Per Minute	0 - 5,000 BPM
Overall Length	14-1/8" (358 mm)
Net Weight	7.1 lbs (3.2 kg)

**BL XPT AFT AVT**  
MOTOR Anti Vibration Technology**STANDARD EQUIPMENT INCLUDES:**

**HR003GM102:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), Side Handle (126882-3), Cleaning Cloth (443122-7), Bit Grease (194683-7), Depth Gauge (331886-4), Hook (191C37-7), Plastic Carrying Case (821815-0)

**HR003GZ:** Tool Only. Batteries and Charger Sold Separately. Side Handle (126882-3), Cleaning Cloth (443122-7), Bit Grease (194683-7), Depth Gauge (331886-4), Hook (191C37-7)

**1-1/8" Rotary Hammer w/AWS****HR007GM101**  **HR007GZ****Maximum Heavy Duty Performance****Rotation Only / Rotation + Hammer / Hammer Only**  
**SDS-PLUS Shank**

- 3 operating modes: Rotation Only / Rotation + Hammer / Hammer Only
- Trigger-lock button prevents accidental start-up for increased safety
- Torque limiter stops bit rotation if bit jams for increased operator safety and tool protection

**Variable Speed, Constant Speed Control****SPECIFICATIONS**

Battery Capacities	40V max XGT
Capacities:	
Concrete	1-1/8" (28 mm)
Steel	1/2" (13 mm)
Wood	1-1/4" (32 mm)
Impact Energy (EPTA)	3.0 J (2.2 ft. lbs)
No Load Speed	0 - 980 RPM
Blows Per Minute	0 - 5,000 BPM
Overall Length	18-5/8" (473 mm)
Net Weight	6.9 lbs (3.1 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AFT AVT AWS**  
MOTOR Anti Vibration Technology**STANDARD EQUIPMENT INCLUDES:**

**HR007GM101:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), Side Handle (122A94-2), Cleaning Cloth (443122-7), Bit Grease (194683-7), Depth Gauge (331886-4), Air Duct Cap (413A50-6), Plastic Carrying Case (821864-7)

**HR007GZ:** Tool Only. Batteries and Charger Sold Separately. Side Handle (122A94-2), Cleaning Cloth (443122-7), Bit Grease (194683-7), Depth Gauge (331886-4), Air Duct Cap (413A50-6), Plastic Carrying Case (821864-7)

**14" Power Cutter****CE001GL401** **CE001GZ02****Makita's First 14" Cordless Power Cutter**

- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Electronic current limiter protects motor from accidental overload
- High no load cutting speed for fast and efficient cutting in a wide range of materials
- Anti-restart feature prevents accidental startup for operator safety
- Anti-vibration housing with integrated spring and drive unit prevents vibration transmission to front and rear handle
- Use with optional Pressurized Water Tank (part no. 988394 610) for 100% cordless concrete cutting

**SPECIFICATIONS**

Battery Capacities	Two 40V max XGT
Blade Diameter	14" (355 mm)
Arbor	1" (25.4 mm)
Maximum Cutting Depth	5" (127 mm)
No Load Speed	5,300 RPM
Overall Length	31" (786 mm)
Net Weight	22.8 lbs (10.3 kg)

**BL XPT AFT**  
MOTOR Anti Vibration Technology**STANDARD EQUIPMENT INCLUDES:**

**CE001GL401:** Four 40V max XGT Batteries (8.0Ah) BL4080F, Dual Port Rapid Charger (DC40RB), 14" Cut-Off Wheel (E-12809-5), Coupling Sleeve (123120-4), Hose Assembly (122B46-9), Box Wrench 13-19 (782037-6), Ring Set (191W53-9)

**CE001GZ02:** Tool Only. Batteries and Charger Sold Separately. 14" Cut-Off Wheel (1 Ea. E-12809-5), Coupling Sleeve (123120-4), Hose Assembly (122B46-9), Box Wrench 13-19 (782037-6), Ring Set (191W53-9)

**NEW**

**Pressurized Water Tank**  
988 394 610  
Sold Separately



**Ideal For Wet Or Dry Cutting Applications**

**Concrete Vibrator****VR003GZ****Up To 15,500 Vibrations Per Minute (VPM) In Power Mode**

- Power mode provides maximum vibration for use with floors, pillars and foundations
- Normal mode ideal for step finishing and controlled pouring/vibrating
- Constant speed control feature maintains constant speed under heavy load
- Anti-restart feature prevents accidental startup of tool during battery changing when switch is locked in the on position
- Switch and battery covers prevents contamination by water, dust, debris or concrete
- Lock-on button enables easy continuous operation with reduced operator strain and fatigue

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Vibrations Per Minute:	
Normal Mode	12,000 VPM
Power Mode	15,500 VPM
Vibrator Diameter	1-1/4" (32 mm)
Shaft Length	3.9 ft (1.2 m)
Overall Length	59" (149.5 cm)
Net Weight	9.1 lbs (4.1kg)

**BL XPT**  
MOTOR Anti Vibration Technology**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. Flexible Shaft (1910E1-5), Wrench 8 (781213-9)

**Constant Speed Control, Anti-Restart**

**NEW**

**1-1/4" Diameter Vibrator Head x 3.9' (1.2 m) Shaft Length**

**NEW BATTERY COVER**

Part No.	Description	For Model
1910J2-8	<ul style="list-style-type: none"> <li>• For use with BL4050F (5.0Ah) and BL4080F (8.0Ah) XGT Batteries</li> <li>• Protects battery against penetration by dust, debris and liquids</li> </ul>	VR003G

**1/2" Hammer Drill-Driver**
**HP001GM102**  **HP001GZ**
**Heavy Duty Drilling Performance**

- Battery protection system provides over-discharge, temperature and circuit protection for enhanced performance, battery cycle life and overall battery life
- 41 electronic clutch settings deliver up to 1,240 in. lbs. of torque
- Mechanical 2-speed control allows operator to quickly access high and low speed modes


**Variable 2-Speed, Reversible**
**BL MOTOR XPT AFT**
**STANDARD EQUIPMENT INCLUDES:**

**HP001GM102:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), 1/2" Keyless Drill Chuck (136229-3), Side Handle (127578-9), Two Double Ended Bit 2-45 (784637-8), Bit Holder (452947-8), Stopper Pole (122578-8), Hook (346317-0), Plastic Carrying Case (321821-5)

**HP001GZ:** Tool Only, Batteries and Charger Sold Separately. 1/2" Keyless Drill Chuck (136229-3), Side Handle (127578-9), Two Double Ended Bit 2-45 (784637-8), Bit Holder (452947-8), Stopper Pole (122578-8), Hook (346317-0)

**XGT 40V | 80V max**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Capacities:	
Masonry	13/16" (20 mm)
Steel	13/16" (20 mm)
Wood	Auger-Bit 2" (50 mm)
	Self-Feed Bit 3" (76 mm)
	Hole Saw 6" (152 mm)

**No Load Speed:**

Low	0 - 650 RPM
High	0 - 2,600 RPM

**Blows Per Minute:**

Low	0 - 9,750 BPM
High	0 - 39,000 BPM

**Maximum Torque** 1,240 in. lbs (140 Nm)

**Overall Length** 7-1/8" (182 mm)

**Net Weight** 4.5 lbs (2.0 kg)

**1/2" Drill-Driver**
**DF001GM102**  **DF001GZ**
**Heavy Duty Drilling Performance**

- Battery protection system provides over-discharge, temperature and circuit protection for enhanced performance, battery cycle life and overall battery life
- 41 electronic clutch settings deliver up to 1,240 in. lbs. of torque
- Mechanical 2-speed control allows operator to quickly access high and low speed modes


**Variable 2-Speed, Reversible**
**BL MOTOR XPT AFT**
**STANDARD EQUIPMENT INCLUDES:**

**DF001GM102:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), 1/2" Keyless Drill Chuck (136232-4), Side Handle (127579-7), Two Double Ended Bit 2-45 (784637-8), Bit Holder (452947-8), Stopper Pole (122579-8), Hook (346317-0), Plastic Carrying Case (321821-5)

**DF001GZ:** Tool Only, Batteries and Charger Sold Separately. 1/2" Keyless Drill Chuck (136232-4), Side Handle (127579-7), Two Double Ended Bit 2-45 (784637-8), Bit Holder (452947-8), Stopper Pole (122579-8), Hook (346317-0)

**XGT 40V | 80V max**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Capacities:	
Steel	13/16" (20 mm)
Wood	Auger-Bit 2" (50 mm)
	Self-Feed Bit 3" (76 mm)
	Hole Saw 6" (152 mm)

**No Load Speed:**

Low	0 - 650 RPM
High	0 - 2,600 RPM

**Maximum Torque** 1,240 in. lbs (140 Nm)

**Overall Length** 7-1/8" (182 mm)

**Net Weight** 4.5 lbs (2.0 kg)

**1/2" Angle Drill**
**XGT 40V | 80V max**
**DA001GM101**  **DA001GZ**
**AC Power - Cordless Versatility**

- Torque limiter stops bit rotation if bit jams for increased operator safety and tool protection
- Soft start feature gradually increases speed to eliminate start up shock
- Variable speed trigger allows operator to adjust speed based on materials or application
- Dual LED job light with pre-glow and after-glow features illuminates work area
- Integrated rafter hook allows operators to hang tool on wood stud, pipe and scaffolding or as lanyard attachment point
- Includes D and straight style side handles


**Automatic Torque Drive Technology (ADT), Variable 2-Speed, Reversible, Soft Start**
**BL MOTOR XPT ADT**
**STANDARD EQUIPMENT INCLUDES:**

**DA001GM101:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), 1/2" Drill Chuck (763250-5), Chuck Key (763251-3), Straight Side Handle (122A18-8), D-Style Front Handle (458431-1), Hex Wrench 6 (783204-6), Hook (127811-9), Plastic Carrying Case (321847-7)

**DA001GZ:** Tool Only, Batteries and Charger Sold Separately. 1/2" Drill Chuck (763250-5), Chuck Key (763251-3), Straight Side Handle (122A18-8), D-Style Front Handle (458431-1), Hex Wrench 6 (783204-6), Hook (127811-9)

**7/16" Hex Angle Drill**
**XGT 40V | 80V max**
**DA002GZ**
**AC Power - Cordless Versatility**

- Features 7/16" hex shank quick release chuck to allow rapid bit changes
- Torque limiter stops bit rotation if bit jams for increased operator safety and tool protection
- Soft start feature gradually increases speed to eliminate start up shock
- Variable speed trigger allows operator to adjust speed based on materials or application
- Dual LED job light with pre-glow and after-glow features illuminates work area
- Integrated rafter hook allows operators to hang tool on wood stud, pipe and scaffolding or as lanyard attachment point
- Includes D and straight style side handles


**Automatic Torque Drive Technology (ADT), Variable 2-Speed, Reversible, Soft Start**
**BL MOTOR XPT ADT**
**STANDARD EQUIPMENT INCLUDES:**

Tool Only, Batteries and Charger Sold Separately. Straight Side Handle (122A18-8), D-Style Front Handle (458431-1), Hex Wrench 6 (783204-6), Hook (127811-9)

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Wood Drilling Capacities:	
Auger-Bit:	2" (50 mm)
Self-Feed Bit (Low / High):	4-5/8" (118 mm) / 2-9/16" (65 mm)
Hole Saw (Low / High):	6-1/4" (159 mm) / 4-1/8" (105 mm)
Steel Drilling Capacity	1/2" (13 mm)
No Load Speed	0 - 400 / 0 - 1,500 RPM
Overall Length	21-1/2" (545 mm)
Net Weight	10.8 lbs (4.9 kg)

**No Load Speed**
**0 - 400 / 0 - 1,500 RPM**
**Overall Length** 21-1/2" (545 mm)

**Net Weight** 9.4 lbs (4.2 kg)

**1/2" Earth Auger**
**XGT**
**40V | 80V max**
**DG001GM105**  **DG001GZ**
**AC Power - Cordless Versatility**

- Includes earth auger handle attachment with bracing bar and bit adapters for use with Makita earth auger drill bits
- Torque limiter stops bit rotation if bit jams for increased operator safety and tool protection
- Soft start feature gradually increases speed to eliminate start up shock
- Variable speed trigger allows operator to adjust speed based on materials or application
- Dual LED job light with pre-glow and after-glow features illuminates work area
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation
- Includes D-Style side handle


**Automatic Torque Drive Technology (ADT), Variable 2-Speed, Reversible, Soft Start**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Drilling Capacities:	
For Sandy Soil	5-7/8" (200 mm)
For Clay Soil	7-7/8" (150 mm)
No Load Speed	0 - 400 / 0 - 1,500 RPM
Overall Length	33-1/4" (842 mm)
Net Weight	14.4 lbs (6.5 kg)

**BL MOTOR XPT ADT**
**STANDARD EQUIPMENT INCLUDES:**

**DG001GM105:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), 1/2" Drill Chuck (763250-5), Chuck Key (763251-3), D-Style Front Handle (458431-1), Adapter A (327684-2), Adapter D (327687-6), Earth Auger Handle (191P11-3)

**DG001GZ05:** Tool Only, Batteries and Charger Sold Separately. 1/2" Drill Chuck (763250-5), Chuck Key (763251-3), D-Style Front Handle (458431-1), Adapter A (327684-2), Adapter D (327687-6), Earth Auger Handle (191P11-3)

**AUGER DRILL BITS**

**E-07347**

**E-12778**

Type	Diameter	Auger Part No.	Replacement Blade Part No.	Replacement Retention Pin Part No.	7/16" Hex Shank Auger Bit Adapters	21-1/4" Extension Bar Part No.	Auger Handle Attachment Part No.	For Model(s)
Earth Auger Drill Bits	4"	E-07347*	E-07668	E-07381	327687-6 (Makita Bit Adapter)	E-07375	191P11-3	DG001G DA001G
	6"	E-07353*	E-07674		327684-2 (Stihl Bit Adapter)			
	8"	E-07369*	E-07680					
Ice Auger Drill Bit	6"	E-12778*	E-12784	E-07381	N/A	E-07375	191P11-3	DG001G DA001G

\*Includes Retention Pin / <sup>1</sup>Stihl is a registered trademark of Andreas Stihl AG & Co. KG

**3/4" Impact Wrench****TW001GM102**  **TW001GZ****Powerful And Precise Heavy Duty Fastening**

- Increased maximum fastening torque with more compact design vs. DTW1001 18V LXT 3/4" Impact Wrench
- 4 stage impact power selection ensure precise fastening and prevents damage to fasteners or materials
- 3 forward and 3 reverse auto stop modes stop impact and rotation at preset levels to ensure fastening accuracy and prevent over/under tightening of fasteners
- Variable speed trigger with full speed mode features shorter trigger travel for reduced operator fatigue
- Twin LED job lights with pre-glow and after-glow features illuminates work area

**Friction Ring****3/4" Square Drive, Variable 4-Speed, Reversible****STANDARD EQUIPMENT INCLUDES:**

**TW001GM102:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Hook (346949-3), Plastic Carrying Case (821828-1)

**TW001GZ:** Tool Only. Batteries and Charger Sold Separately. Hook (346949-3)



40V | 80V max

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Square Drive	3/4"
No Load Speed:	0 - 950 / 1,150 / 1,400 / 1,800 RPM
Impacts Per Minute:	0 - 1,900 / 2,200 / 2,400 / 2,500 IPM

**Maximum Fastening Torque****1,330 ft. lbs (1,800 Nm)****Nut-Busting Torque (Reverse)****1,510 ft. lbs (2,050 Nm)****Overall Length** 8-1/2" (217 mm)**Net Weight** 7.1 lbs (3.2 kg)**1/2" Mid-Torque Impact Wrenches****TW008GZ (Detent Pin)****TW007GZ (Friction Ring)****Powerful And Precise Heavy Duty Fastening**

- 4 stage impact power selection ensure precise fastening and prevents damage to fasteners or materials
- 3 forward and 3 reverse auto stop modes stop impact and rotation at preset levels to ensure fastening accuracy and prevent over/under tightening of fasteners
- Variable speed trigger with full speed mode features shorter trigger travel for reduced operator fatigue
- Twin LED job lights with pre-glow and after-glow features illuminates work area
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Square Drive	1/2"

**No Load Speed:**  
0 - 600 / 0 - 1,200 / 0 - 1,900 / 0 - 2,300 RPM

**Impacts Per Minute:**  
0 - 1,200 / 0 - 1,900 / 0 - 2,700 / 0 - 2,900 IPM

**Maximum Fastening Torque****560 ft. lbs (760 Nm)****Nut-Busting Torque (Reverse)****810 ft. lbs (1,100 Nm)****Overall Length** 6-11/16" (170 mm)**Net Weight** 4.5 lbs (2.0 kg)**1/2" Square Drive, Variable 4-Speed, Reversible Electric Brake****STANDARD EQUIPMENT INCLUDES:**

**TW008GZ:** Tool Only. Batteries and Charger Sold Separately. Hook (346949-3)

**TW007GZ:** Tool Only. Batteries and Charger Sold Separately. Hook (346949-3)

**1/2" Impact Wrenches**

40V | 80V max

**TW005GM102 (Detent Pin)**  **TW005GZ (Detent Pin)****TW004GZ (Friction Ring)****Powerful And Precise Heavy Duty Fastening**

- 4 stage impact power selection ensure precise fastening and prevents damage to fasteners or materials
- 3 forward and 3 reverse auto stop modes stop impact and rotation at preset levels to ensure fastening accuracy and prevent over/under tightening of fasteners
- Variable speed trigger with full speed mode features shorter trigger travel for reduced operator fatigue
- Twin LED job lights with pre-glow and after-glow features illuminates work area

**1/2" Square Drive, Variable 4-Speed, Reversible****STANDARD EQUIPMENT INCLUDES:**

**TW005GM102:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Hook (346317-0), Plastic Carrying Case (821821-5)

**TW005GZ / TW004GZ:** Tool Only. Batteries and Charger Sold Separately. Hook (346949-3)

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Square Drive	1/2"
No Load Speed:	0 - 1,000 / 1,800 / 2,600 / 3,200 RPM
Impacts Per Minute:	0 - 1,800 / 2,600 / 3,400 / 4,000 IPM

**Maximum Fastening Torque****260 ft. lbs (350 Nm)****Nut-Busting Torque (Reverse)****465 ft. lbs (630 Nm)****Overall Length** 5-5/8" (144 mm)**Net Weight** 2.7 lbs (1.2 kg)**1/4" Impact Driver**

40V | 80V max

**TD001GM103**  **TD001GZ****High Fastening Power And Precision**

- 4 stage impact speed selection + TEK 1, TEK 2, 'Cam-Out' and Bolt modes to ensure precise fastening and prevent damage to fasteners
- 'Cam-out' elimination mode operates at low speed until fastening begins to eliminate 'cam-out' and cross-threading
- BOLT MODE with 3 forward and 3 reverse auto stop modes stop impact and rotation to ensure consistent and precise fastening
- 2-stage TEK modes reduce impact power during final stages of fastener seating in thick or thin metal

**Variable 4-Speed, Reversible****STANDARD EQUIPMENT INCLUDES:**

**TD001GM103:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), Hook (346317-0), Plastic Carrying Case (821821-5)

**TD001GZ:** Tool Only. Batteries and Charger Sold Separately. Hook (346317-0)

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Hex Shank	1/4"
No Load Speed	0 - 3,700 / 3,200 / 2,100 / 1,100 RPM
Impacts Per Minute	0 - 4,400 / 3,600 / 2,600 / 1,100 IPM
Maximum Torque	1,950 in. lbs (220 Nm)
Overall Length	4-3/4" (120 mm)
Net Weight	2.3 lbs (1.0 kg)

**4-Speed Air Duster**

40V | 80V max

**AS001GZ****Ideal For Cleaning / Blowing Dust, Dirt And Debris Or Inflating / Deflating Inner Tubes, Inflatable Pools, Sports Balls, Air Mattresses, Compression Bags And More**

- Deflation mode provides suction for deflating inner tubes, inflatable pools, air mattresses and compression bags
- One-touch nozzle replacement minimizes downtime changing nozzles or adapters
- 4-stage air volume selection with variable speed trigger switch suitable for indoor applications with controlled air speed and air volume
- Rear filter protects motor against contamination by dust or debris and allows attachment of deflation nozzles
- Lock-out button prevents accidental trigger engagement • Lock-on button reduces operator strain and fatigue when used over prolonged periods
- Low noise level at just 79 dB (A) • Hanging hole allows duster to be hung in manufacturing or shop environments
- LED job light with pre-glow and after-glow features illuminates work area

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Maximum Air Volume	39 CFM (1.1 m <sup>3</sup> /min)
Maximum Air Velocity	447 MPH (200 m/sec)
Maximum Blowing Force	Mode: 4 / 3 / 2 / 1: 2.8 / 2.3 / 1.7 / 1.1 N
Overall Length	6-7/8" (175 mm)
Net Weight	1.9 lbs (0.8 kg)

**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. Wide Range Nozzle (191X19-5), Nozzle 3 (191X11-1), Nozzle 7 (191X13-7), Nozzle 13 (191X15-3), Pinch Valve Nozzle (191X17-9)

**Variable 4-Speed, LED Job Light**

## Mitre Saws w/AWS

XGT 40V | 80V max

## Large Cutting Capacity And Maximum Cutting Power

- Independent AWS push-button switch allows operator to run dust extractor when mitre saw is not running for maximum dust collection and cleaning after operation
- "Zero clearance" rail forward design enables saw to be placed against wall to maximize effective work space
- Gear reduction system maximizes cutting capacity
- Sliding left and right side fences can be adjusted outwards when bevel cutting or inwards for increased support of small or delicate materials

**BL DXT** MOTOR **AWS**

Bluetooth®

Bluetooth is a registered trademark of Bluetooth SIG

## 12" Mitre Saw

**LS003GZ**Cuts Up To  
4-1/4" x 14-1/4"

## SPECIFICATIONS

Battery Capacities 40V max XGT

Blade Diameter 12" (305 mm)

Arbor 1" (25.4 mm)

No Load Speed 3,600 RPM

Dimensions (L x W x H) 35-1/4" x 27-1/4" x 28-1/2"

(898 mm x 690 mm x 725 mm)

Net Weight 65.7 lbs (29.8 kg)

## 10" Mitre Saw

**LS004GZ**Cuts Up To  
3-5/8" x 11"

## SPECIFICATIONS

Battery Capacities 40V max XGT

Blade Diameter 10" (255 mm)

Arbor 5/8" (15.9 mm)

No Load Speed 3,600 RPM

Dimensions (L x W x H) 31-3/4" x 25-3/8" x 26"

(805 mm x 644 mm x 660 mm)

Net Weight 57.1 lbs (25.9 kg)

## 8-1/2" Mitre Saw

**LS002GZ**Cuts Up To  
2-3/4" x 12"

## SPECIFICATIONS

Battery Capacities 40V max XGT

Blade Diameter 8-1/2" (216 mm)

Arbor 5/8" (15.9 mm)

No Load Speed 4,800 RPM

Dimensions (L x W x H) 27-5/8" x 21-3/4" x 22"

(702 mm x 551 mm x 557 mm)

Net Weight 34.7 lb (15.7 kg)

**LS002GZ****STANDARD EQUIPMENT INCLUDES:** Tool Only. Batteries and Charger Sold Separately. 12" C.T. Blade 60T (B-66983), Dust Bag (122852-0), Triangle Rule (762001-3), Vertical Vise (126617-2), Holder 90 (327145-2), Hex Wrench 6 (781044-6)

## 10-1/4" Rear-Handle Circular Saw w/AWS

XGT 40V | 80V max

**RS002GM101****RS002GZ**

## Cut 4x Material In A Single Pass

- Max. 3-3/4" cut capacity (at 0°) ideal for single pass cutting of 4X dimensional lumber
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Soft start feature gradually increases speed to eliminate start up shock
- Trigger-lock button prevents accidental start-up for increased safety
- Bevel capacity of 0° - 56° with positive stop at 22.5° and 45°
- High performance and lightweight design with magnesium blade case and base plate

Electric  
Brake,  
Soft Start

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AWS**

Bluetooth®

**STANDARD EQUIPMENT INCLUDES:**

RS002GM101: 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), 10-1/4" C.T. Blade 24T (E-07272), Side Handle (140Y64-3), Offset Wrench 13 (782016-4)

RS002GZ: Tool Only. Batteries and Charger Sold Separately. 10-1/4" C.T. Blade 24T (E-07272), Side Handle (140Y64-3), Offset Wrench 13 (782016-4)

## 9-1/4" Circular Saw w/AWS &amp; Guide Rail Base

XGT 40V | 80V max

**HS009GZ**

## High Cutting Capacity With Cordless Freedom And Guide Rail Precision

- Quick adjust blade guard lever allows operator to retract guard when making mitre or bevel cuts
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Constant speed control maintains consistent speed under heavy load
- Anti-restart features prevents accidental startup of tool during battery changing when switch is locked in the on position
- Soft start feature gradually increases speed to eliminate start up shock
- Twin LED job light, with pre-glow and afterglow, and blower function keeps cut line visible for precise cutting performance



Electric Brake, Soft Start

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AWS**

Bluetooth®

**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. 9-1/4" CT Blade 24T (E-01965), Hex Wrench 6 (783204-6), Sub Base (162687-4)

## 10-1/4" Circular Saw w/AWS &amp; Guide Rail Base

XGT 40V | 80V max

**HS011GZ**

## High Cutting Capacity With Cordless Freedom And Guide Rail Precision

- Quick adjust blade guard lever allows operator to retract guard when making mitre or bevel cuts
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Constant speed control maintains consistent speed under heavy load
- Anti-restart features prevents accidental startup of tool during battery changing when switch is locked in the on position
- Soft start feature gradually increases speed to eliminate start up shock

Electric Brake, Soft Start

**NEW**

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AFT AWS**

Bluetooth®

**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. 10-1/4" C.T. Blade 24T (E-07272), Sub Base (162A32-2), Hex Wrench 6 (783204-6)

## 7-1/4" Rear-Handle Circular Saw

XGT 40V | 80V max

**RS001GZ**

## BEST CUTTING CAPACITY, SPEED AND WEIGHT IN CLASS

- Max. 2-9/16" cut capacity (at 0°) ideal for single pass cutting of 3X dimensional lumber
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Soft start feature gradually increases speed to eliminate start up shock
- Trigger-lock button prevents accidental start-up for increased safety
- Bevel capacity of 0° - 53° with positive stop at 22.5° and 45°
- High performance and lightweight design with magnesium blade case and base plate
- On-board wrench storage for fast and easy blade changes

Electric Brake,  
Soft Start

## SPECIFICATIONS

Battery Capacities 40V max XGT

Blade Diameter 7-1/4" (185 mm)

Arbor 5/8" (15.9 mm)

Maximum Cutting Depth:

0° 2-9/16" (65 mm)

45° 1-3/4" (45 mm)

53° 1-1/2" (38 mm)

No Load Speed 6,400 RPM

Overall Length 17-1/2" (446 mm)

Net Weight 9.6 lbs (4.3 kg)

**BL XPT ADT**

Bluetooth®

**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. 7-1/4" CT Blade 24T (B-61656), Offset Wrench 13 (782016-4)

**7-1/4" Circular Saw w/AWS****HS003GM103**  **HS003GZ****High Power Professional Cutting**

- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Soft start feature gradually increases speed to eliminate start up shock
- Twin LED job light, with pre-glow and afterglow, and blower function keeps cut line visible for precise cutting performance
- Trigger-lock button prevents accidental start-up for increased safety

**Electric Brake, Soft Start**

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT ADT AWS** **STANDARD EQUIPMENT INCLUDES:****HS003GM103:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), 7-1/4" CT Blade 24T (B-61656), Dust Nozzle Set (196520-6), 21" Tool Bag (82107X)**HS003GZ:** Tool Only, Batteries and Charger Sold Separately, 7-1/4" CT Blade 24T (B-61656), Dust Nozzle Set (196520-1), Hex Wrench 6 (783204-6)**SPECIFICATIONS**

Battery Capacities	40V max XGT
Blade Diameter	7-1/4" (165 mm)
Arbor	5/8" (15.9 mm)
Maximum Cutting Depth:	
0°	2-5/8" (66 mm)
45°	1-13/16" (45.5 mm)
56°	1-5/16" (34.0 mm)
No Load Speed	6,000 RPM
Overall Length	13" (331 mm)
Net Weight	7.5 lbs (3.4 kg)

**XGT 40V | 80V max****7-1/4" Circular Saw w/AWS & Guide Rail Base****HS004GZ****High Power Professional Cutting**

- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Soft start feature gradually increases speed to eliminate start up shock
- Twin LED job light, with pre-glow and afterglow, and blower function keeps cut line visible for precise cutting performance
- Trigger-lock button prevents accidental start-up for increased safety


**Electric Brake, Soft Start****SPECIFICATIONS**

Battery Capacities	40V max XGT
Blade Diameter	7-1/4" (185 mm)
Arbor	5/8" (15.88 mm)
Maximum Cutting Depth:	
0°	2-3/8" (60 mm)
45°	1-11/16" (43 mm)
48°	1-5/8" (41 mm)
No Load Speed	6,000 RPM
Overall Length	13-1/4" (337 mm)
Net Weight	8.2 lbs (3.7 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT ADT AWS** **STANDARD EQUIPMENT INCLUDES:****Tool Only.** Batteries and Charger Sold Separately. 7-1/4" CT Blade 24T (B-61656), Dust Nozzle Set (196520-1), Guide Rule (164095-8), Hex Wrench 6 (783204-6)**6-1/2" Plunge Cut Circular Saw w/AWS****SP001GT102**  **SP001GZ02****SP001GZ05 (Includes 55" Guide Rail)****High Power Professional Cutting**

- Battery protection system provides over-discharge, temperature and current protection for enhanced performance, battery cycle life and overall battery life
- High performance and lightweight design with magnesium diecast baseplate



Bluetooth is a registered trademark of Bluetooth SIG

**BL AWS** **STANDARD EQUIPMENT INCLUDES:****SP001GT102:** 40V max XGT Battery (5.0Ah) BL4050F, Rapid Charger (DC40RA), 6-1/2" C.T. Blade 56T (B-57342), Hex Wrench 5 (783203-8), Interlocking Case (197213-3)**SP001GZ05:** Tool Only, Batteries and Charger Sold Separately. 6-1/2" C.T. Blade 56T (B-57342), Hex Wrench 5 (783203-8), Interlocking Case (197213-3), 55" (139.7 cm) Guide Rail (194368-5)**SP001GZ02:** Tool Only, Batteries and Charger Sold Separately. 6-1/2" C.T. Blade 56T (B-57342), Hex Wrench 5 (783203-8), Interlocking Case (197213-3)**SPECIFICATIONS**

Battery Capacities	40V max XGT
Blade Diameter	6-1/2" (165 mm)
Arbor	13/16" (20 mm)
Maximum Cutting Depth:	
0°	2-3/16" (56 mm)
45°	1-9/16" (40 mm)
48°	1-1/2" (38 mm)
No Load Speed	2,500 - 4,900 RPM
Overall Length	14-1/2" (375 mm)
Net Weight	8.2 lbs (3.7 kg)

**XGT 40V | 80V max****Reciprocating Saw****JR001GM101**  **JR001GZ****High Power Professional Cutting**

- Increased power with brushless DC motor
- Increased jobsite durability due to lubricating mechanism and reinforced gear shaft
- Tool-less shoe adjustment enables fast and easy adjustment on the jobsite
- 2 speed settings provides ideal settings for wood or metal cutting applications
- Electric brake stops blade immediately after trigger is released for increased operator safety
- Blade ejection lever located on side of tool housing for operator convenience
- Vertical crank mechanism minimizes blade deflection and reduces vibration

**Variable 2-Speed, Electric Brake, Constant Speed Control****SPECIFICATIONS**

Battery Capacities	40V max XGT
Maximum Cutting Capacities:	
Pipe	5-1/8" (130 mm)
Wood (w/11-3/4" Blade)	10" (255 mm)
Strokes Per Minute:	
High	0 - 3,000 SPM
Low	0 - 2,300 SPM
Length of Stroke	1-1/4" (32 mm)
Overall Length	18" (457 mm)
Net Weight	7.8 lbs (3.5 kg)

**STANDARD EQUIPMENT INCLUDES:****JR001GM101:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Blade (1 Ea.B-05038), Blade (1 Ea.B-05044), Blade (1 Ea.B-05153), Plastic Carrying Case (821795-8)**JR001GZ:** Tool Only, Batteries and Charger Sold Separately, Blade (1 Ea. B-05038), Blade (1 Ea. B-05044), Blade (1 Ea. B-05153)**Reciprocating Saw****JR002GM102**  **JR002GZ****High Power Lightweight Professional Cutting**

- Orbital cutting mechanism enables operator to achieve a more aggressive cut for fast, rough cutting applications
- Tool-less shoe adjustment enables fast and easy adjustment on the jobsite
- Variable speed dial and trigger switch allows operator to adjust cutting speed to suit material or application
- Electric brake stops blade immediately after trigger is released for increased operator safety
- Constant speed control maintains constant speed under heavy load
- Anti-restart feature prevents accidental start up of tool during battery changing when switch is in the on position

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Maximum Cutting Capacities:	
Pipe	5-1/8" (130 mm)
Wood (w/11-3/4" Blade)	10" (255 mm)
Strokes Per Minute	0 - 3,000 SPM
Length of Stroke	1-1/4" (32 mm)
Overall Length	16-3/4" (424 mm)
Net Weight	8.6 lbs (3.9 kg)

**BL XPT AVT****STANDARD EQUIPMENT INCLUDES:****JR002GM102:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Reciprocating Saw Blade (E-10693)**JR002GZ:** Tool Only, Batteries and Charger Sold Separately, Reciprocating Saw Blade (E-10693)**NEW**  
**Variable Speed, Electric Brake, Constant Speed Control**

**Compact Router w/AWS**
**RT001GD101**  **RT001GZ01**
**Accepts Makita and other industry standard 2 piece template guides**

- Soft start feature gradually increases speed to eliminate start up shock
- Constant speed control maintains constant speed under heavy load
- Variable speed dial allows operator to adjust speed based on materials or application
- Soft brake brings bit to a gentle stop after tool is turned off for maximum operator and material protection
- Anti-restart feature prevents accidental start up of tool during battery changing when switch is locked in the on position

**Variable Speed, Soft Start, Constant Speed Control, Soft Brake, Anti-Restart**
**SPECIFICATIONS**

Battery Capacities	Two 40V max XGT
Collet Capacity	1/4" (6.35 mm)
No Load Speed	10,000 - 31,000 RPM
Overall Height	7-3/4" (197 mm)
Net Weight	3.4 lbs (1.5 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AWS** 
**XGT 40V | 80V<sub>max</sub>**

**NEW**
**STANDARD EQUIPMENT INCLUDES:**
**RT001GD101:** 40V max XGT Battery (2.5Ah) BL4025, Rapid Charger (DC40RA), 1/4" Collet Cone (763637-1), Trimmer Base Set (196613-4), Straight Guide (122965-7), Dust Nozzle Set (195559-1), Template Guide 10 (343577-5), Trimmer Guide (122703-7), Wrench 22 (781011-1), Wrench 13 (781039-9)

**RT001GZ01:** Tool Only. Batteries and Charger Sold Separately. 1/4" Collet Cone (763637-1), Trimmer Base Set (196613-4), Straight Guide (122965-7), Dust Nozzle Set (195559-1), Template Guide 10 (343577-5), Trimmer Guide (122703-7), Wrench 22 (781011-1), Wrench 13 (781039-9)

**18 ga 1-5/8" Brad Nailer**
**XGT 40V | 80V<sub>max</sub>**
**PT001GZ**
**Fires Up To 5,000 nails Per Battery Charge with 40V max 2.5Ah Battery**

- Low reaction force mechanism for easy, high-quality nailing of long pins in soft and hard woods
- Slim contact tip design enables precise fastening in wood trim, crown moulding, baseboard, cabinetry and other woodworking applications
- Anti-dry fire mechanism prevents added wear on the drive pin and damage to materials
- Rubber bumpers protect tool and materials from damage
- Clear magazine enables fast identification of remaining nail capacity
- Trigger lock-off feature prevents accidental firing for increased operator safety
- Compact design for easy use when working in tight spaces and corners


**SPECIFICATIONS**

Battery Capacities	40V max XGT
Magazine Capacities	100 Nails
Gauge	18 ga
Nail Length	5/8", 3/4", 1", 1-3/16", 1-3/8", 1-5/8" (15 mm, 20 mm, 25 mm, 30 mm, 35 mm, 40 mm)
Overall Length	9-1/4" (234 mm)
Net Weight	4.2 lbs (1.9 kg)

**BL XPT**
**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. Nose Adapter (422665-2), Hook (346317-0), Hex Wrench 3 (783201-2)

**9" Angle Grinder w/AWS**
**XGT 40V | 80V<sub>max</sub>**
**GA038GZ**
**Heavy Duty Grinding Power With Cordless Freedom**

- Anti-restart feature prevents accidental start up of tool during battery changing when switch is locked in the on position
- Soft start feature gradually increases speed to eliminate start up shock
- Electronic current limiter protects motor from accidental overload
- Electric brake stops wheel or disc 3-5 seconds after switch is released for increased operator safety
- Battery protection system provides over-discharge, temperature and circuit protection for enhanced performance, battery cycle life and overall battery life
- Low vibration rear handle ideal for improved operator comfort during periods of prolonged use
- Integrated dust screens act as additional protection against dust, dirt and debris

**Two-Stage Safety Paddle Switch, Electric Brake, Soft Start, Electronic Current Limiter, Anti-Restart**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Grinding Wheel	9" (230 mm)
No Load Speed	6,600 RPM
Arbor Size	7/8" (22.23 mm)
Spindle Thread	5/8"
Overall Length	19-1/2" (497 mm)
Net Weight	8.6 lbs (3.9 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AFT AWS** 
**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. Side Handle (143486-6), Lock Nut Wrench 28 (782412-6), Tool-Less Wheel Cover (141A57-9), Inner Flange (224500-8), Lock Nut 5/8"-45 (224486-6)

**XGT 40V | 80V<sub>max</sub>**
**3-1/4" Planer w/AWS**
**KP001GM101**  **KP001GZ**
**Makita's First 40V max XGT Planer**

- Soft start feature gradually increases speed to eliminate start up shock
- Electric brake stops blades 3-5 seconds after trigger is released for increased operator safety
- Anti-restart feature prevents accidental startup of tool during battery changing when switch is locked in the on position
- Battery protection system provides over-discharge, temperature and current protection for enhanced performance, battery cycle life and overall battery life
- Base plate foot protects materials and blade from damage

**Maximum 5/32" Planing & 1" Shiplapping Depth**

**NEW**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
No Load Speed	15,000 RPM
Maximum Capacities:	
Planing Width	3-1/4" (82 mm)
Planing Depth	5/32" (4 mm)
Shiplapping	1" (25 mm)
Overall Length	15-1/8" (385 mm)
Net Weight	6.7 lbs (3.0 kg)

**STANDARD EQUIPMENT INCLUDES:**
**KP001GM101:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), 3-1/4" C.T. Mini Planer Blade (A-82921), Blade Gauge Assembly (191C19-9), Guide Rule (191C23-8), Depth Guide (342390-8), Socket Wrench 9 (782209-3), Anti-Corrosion Paper (442198-1), Interlocking Case (97212-5)

**KP001GZ:** Tool Only. Batteries and Charger Sold Separately. 3-1/4" C.T. Mini Planer Blade (A-82921), Blade Gauge Assembly (191C19-9), Guide Rule (191C23-8), Depth Guide (342390-8), Socket Wrench 9 (782209-3), Anti-Corrosion Paper (442198-1), Interlocking Case (97212-5)

**23 ga Pin Nailer**
**XGT 40V | 80V<sub>max</sub>**
**PT001GZ**
**Hose-Free Maneuverability And Control With Low Reaction Force**

- Low reaction force mechanism for easy, high-quality nailing of long pins in hard density materials
- Slim contact tip design enables precise fastening in wood trim, crown moulding, baseboard, cabinetry and other woodworking applications
- On-board depth control dial for quick and easy adjustment
- Trigger lock-off feature prevents accidental firing for increased operator safety
- Anti-dry fire mechanism prevents added wear on drive pin
- Battery protection system provides over-discharge, temperature and circuit protection for enhanced performance, battery cycle life and overall battery life


**NEW**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Magazine Capacities	100 Nails
Gauge	23 ga
Pin Length	5/8", 11-16", 1", 1-3/16", 1-3/8" (15 mm, 18 mm, 25 mm, 30 mm, 35 mm)
Overall Length	10-3/8" (265 mm)
Net Weight	3.8 lbs (1.7 kg)

**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. Nose Adapter (422844-2), Hex Wrench 3 (783201-2), Hook (346317-0)

**6" Angle Grinder**
**XGT 40V | 80V<sub>max</sub>**
**GA036GZ**
**Heavy Duty Grinding Power With Cordless Freedom**

- Anti-restart feature prevents accidental start up of tool during battery changing when switch is locked in the on position
- Soft start feature gradually increases speed to eliminate start up shock
- Electronic current limiter protects motor from accidental overload
- Electric brake stops wheel or disc 3-5 seconds after switch is released for increased operator safety
- Battery protection system provides over-discharge, temperature and circuit protection for enhanced performance, battery cycle life and overall battery life
- Integrated dust screens act as additional protection against dust, dirt and debris
- Slim, ergonomic soft rubber grip design for vibration absorption and comfortable operation

**Two-Stage Safety Paddle Switch, Electric Brake, Soft Start, Electronic Current Limiter, Anti-Restart**

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Grinding Wheel	6" (150 mm)
No Load Speed	8,500 RPM
Arbor Size	7/8" (22.23 mm)
Spindle Thread	5/8"
Overall Length	16-1/8" (410 mm)
Net Weight	5.3 lbs (2.4 kg)

**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. 6" Depressed Centre Wheel (1 Ea-A-95978-25), Wheel Cover (347776-1), Side Handle (158237-4), Lock Nut Wrench 28 (782424-9), Inner Flange (224448-4), Lock Nut 5/8"-45 (224568-4)

**5" X-Lock Angle Grinders w/AWS****XGT** 40V | 80V max

**Thumb Switch**  
with Lock-On, Electric Brake, Variable Speed  
**GA041GZ**



**Two Stage Safety Paddle Switch**  
Electric Brake, Variable Speed  
**GA044GZ**

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Grinding Wheel	5" (125 mm)
No Load Speed	3,000 - 8,500 RPM
Arbor Size	7/8" (22.2 mm)
Thread	X-Lock
Overall Length	17" (433 mm)
Net Weight	5.1 lbs (2.3 kg)

**Makita's First 40V max XGT X-Lock Angle Grinders**

- Constant speed control feature maintains constant speed under heavy load
- Anti-restart feature prevents accidental start up of tool during battery changing when switch is locked in the on position
- Soft start feature gradually increases speed to eliminate start up shock
- Electronic current limiter protects motor from accidental overload
- Variable speed dial enables operator to adjust wheel speed based on materials or application

**NEW**

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AFT AWS** **STANDARD EQUIPMENT INCLUDES:**

**GA041GZ / GA044GZ:** Tool Only. Batteries and Charger Sold Separately. 5" Depressed Center Wheel (E-00468), Wheel Cover (141129-0), Side Handle (158237-4), Clip-On Cut Off Wheel Guards (199710-5)

**5" Angle Grinders w/AWS****XGT** 40V | 80V max

**Thumb Switch**  
with Lock-On, Electric Brake, Variable Speed  
**GA023GZ**



**Two Stage Safety Paddle Switch**  
Electric Brake, Variable Speed  
**GA029GZ**

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Grinding Wheel	5" (125 mm)
No Load Speed	3,000 - 8,500 RPM
Arbor Size	7/8" (22.23 mm)
Spindle Thread	5/8" - 11 UNC
Overall Length	16-3/4" (425 mm)
Net Weight	5.1 lbs (2.3 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AFT AWS** **STANDARD EQUIPMENT INCLUDES:**

**GA023GZ / GA029GZ:** Tool Only. Batteries and Charger Sold Separately. 5" Depressed Centre Wheel (D-20797), Wheel Cover (347480-2), Side Handle (158237-4), Lock Nut Wrench 28 (782424-9), Inner Flange (224448-4), Lock Nut 5/8"-45 (224568-4)

**5" Angle Grinders****XGT** 40V | 80V max

**Thumb Switch**  
with Lock-On, Electric Brake  
**GA005GM102**  **GA005GZ**



**Two Stage Safety Paddle Switch**  
Electric Brake  
**GA013GM102**  **GA013GZ**

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Grinding Wheel	5" (125 mm)
No Load Speed	8,500 RPM
Arbor Size	7/8" (22.23 mm)
Spindle Thread	5/8" - 11 UNC
Overall Length	16-1/8" (410 mm)
Net Weight	7.9 lbs (3.6 kg)

**BL XPT AFT****STANDARD EQUIPMENT INCLUDES:**

**GA005GM102 / GA13GM102:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), 5" Depressed Centre Wheel (D-20797), Wheel Cover (347480-2), Side Handle (158237-4), Lock Nut Wrench 28 (782424-9), Inner Flange (224448-4), Lock Nut 5/8"-45 (224568-4), Plastic Carrying Case (821803-1)

**GA005GZ / GA013GZ:** Tool Only. Batteries and Charger Sold Separately. 5" Depressed Centre Wheel (D-20797), Wheel Cover (347480-2), Side Handle (158237-4), Lock Nut Wrench 28 (782424-9), Inner Flange (224448-4), Lock Nut 5/8"-45 (224568-4)

**High Power Professional Cordless Grinding**

- LED charge level indicator displays approximate remaining battery power
- Anti-restart feature prevents accidental start up of tool during battery changing when switch is locked in the on position
- Soft start feature gradually increases speed to eliminate start up shock
- Electronic current limiter protects motor from accidental overload
- Electric brake stops wheel or disc 3-5 seconds after switch is released for increased operator safety

**NEW****Band Saw****XGT** 40V | 80V max**PB002GM101**  **PB002GZ****Maximum Cutting Capacity With High Cutting Speed**

- Constant speed control maintains constant speed under heavy load
- Variable speed dial and trigger switch allows operator to adjust cutting speed based on materials or application
- Adjustable stopper plate provides maximum cutting support for materials
- Aluminum diecast frame for maximum cutting rigidity and increased durability
- Easy blade tracking adjustment for increased performance and productivity
- Lock-off button prevents accidental startup and is easily accessible by left or right hand users
- Ball bearing blade guide provides smooth blade movement for increased cutting efficiency
- Retractable hook allows tool to be hung on ladders, pipes or scaffolding



**Variable Speed, Constant Speed Control, Electric Brake**

Battery Capacities	40V max XGT
Cutting Capacities:	
Round Material	5" (127 mm)
Square Material	5" x 5" (127 mm x 127 mm)
Blade Speed	0 - 630 ft./min.
Overall Length	20" (510 mm)
Net Weight	13.1 lbs (5.9 kg)

**STANDARD EQUIPMENT INCLUDES:**

**PB002GM101:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), D-Style Front Handle (273030-6), Hex Wrench 4 (783202-0), Hook (122B66-5), Plastic Carrying Case

**PB002GZ:** Tool Only. Batteries and Charger Sold Separately. Bi-Metal Band Saw Blade 10TPI (E-13225), D-Style Front Handle (273030-6), Hex Wrench 4 (783202-0), Hook (122B60-5)

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Cutting Capacities:	
Round Material	5" (127 mm)
Square Material	5" x 5" (127 mm x 127 mm)
Blade Speed	0 - 630 ft./min.
Overall Length	20" (510 mm)
Net Weight	13.1 lbs (5.9 kg)

**SPECIFICATIONS****7-1/4" Metal Circular Saw****XGT** 40V | 80V max**CS002GZ****Makita's First 40V max XGT Metal Cutting Circular Saw**

- Soft start feature gradually increases speed to eliminate start up shock
- Quick adjust blade guard lever allows operator to safely retract guard
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Constant speed control maintains constant speed under heavy load
- Anti-restart features prevents accidental startup of tool during battery changing when switch is locked in the on position
- LED job light with pre-glow and after-glow features illuminates work area
- Quickly and easily detachable dust box enables efficient dust collection and disposal

**NEW****BL XPT AFT****STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. 7-1/4" C.T. Blade 45T (E-12815), Hex Wrench 5 (783203-8), Guide Rule (164095-8)

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Blade Diameter	7-1/4" (185 mm)
Arbor	5/8" (15.8 mm)
No Load Speed	3,500 RPM
Maximum Cutting Capacity	2-5/8" (67 mm)
Overall Length	13-3/4" (350 mm)
Net Weight	7.8 lbs (3.5 kg)

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Blade Diameter	7-1/4" (185 mm)
Arbor	5/8" (15.8 mm)
No Load Speed	3,500 RPM
Maximum Cutting Capacity	2-5/8" (67 mm)
Overall Length	13-3/4" (350 mm)
Net Weight	7.8 lbs (3.5 kg)

**Inflator**
**MP001GZ**
**Up To 160 PSI (1,110 kPa) Maximum Air Pressure**
**HIGHEST MAX. AIR PRESSURE IN-CLASS**

- Perfect for inflating car tires, motorcycle tires, light truck tires, bicycle tires, inflatable toys, sports balls, and more
- Digital air pressure gauge with enhanced backlit display easily allows user to set desired PSI, kPa, or BAR
- Automatically stops once desired air pressure is reached for maximum accuracy and convenience
- Air pressure setting is stored when turned off, ideal for repetitive applications
- Air release function allows operator to reduce air pressure in case of over-inflation
- LED job light enables easy operation at night or in dark areas
- 25-1/2" overall hose length offers maximum reach


**SPECIFICATIONS**

Battery Capacities	40V max XGT
Maximum Air Pressure	161 PSI
Duty Cycle	10 Minutes On / 5 Minutes Off
Overall Length	10-3/4" (272 mm)
Net Weight	4.6 lbs (2.1 kg)

**LED Job Light,  
Digital Air Pressure Gauge,  
Auto-Stop Function**
**XPT**
**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately.  
Swim Ring Adapter (TE0000033), French Adapter (TE00000594),  
Ball Adapter (TE00000592)

**Cordless or Electric Jobsite Radio with Bluetooth**
**XGT**
**40V | 80V max**
**MR006G**
**Compatible with Makita 40V max XGT / 18V LXT /**
**12V CXT Batteries or AC Power**

- Equipped with Bluetooth 5.0 to wirelessly connect your mobile device to play music
- 2 Side firing speakers deliver stereo sound and a dedicated bottom firing subwoofer for deep and rich audio quality
- 7 pre-set equalizer modes with LED colour indication to optimize sound output according to audio genre
- MYEQ feature allows for independent adjustment of Treble, Midrange and Bass
- Dust and water-resistant construction (IP65 rated) for improved operation in harsh job site conditions
- Rugged design with expanded rubber bumpers and front metal guard for maximum protection on the jobsite
- Folding carry handle with soft rubber grip and built in FM antenna for easy transportation
- USB port enables convenient charging of mobile devices


**SPECIFICATIONS**

Battery Capacities:	40V max XGT
18V LXT / 12V max CXT Li-Ion	
Dimensions (L x W x H)	11" x 6-1/3" x 11-3/4" (280 mm x 171 mm x 298 mm)
Net Weight	9.5 lbs (4.3 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately.  
AC Adapter (SE00000681)

**Cordless or Electric Jobsite Radio with Bluetooth**
**XGT**
**40V | 80V max**
**MR002G**
**Compatible With Makita 40V max XGT / 18V LXT /**
**12V CXT Batteries Or AC Power**

- Equipped with Bluetooth to wirelessly connect your mobile device to play music
- Runs up to 27.5 hours on a single charge with 40V max XGT (4.0Ah) battery
- Delivers rich, full stereo sound from two powerful side-firing speakers
- Dust and water-resistant construction (IP65 rated) for improved operation in harsh job site conditions
- Rugged design with expanded rubber bumpers and front metal guard for maximum protection on the jobsite
- Folding carry handle with soft rubber grip and built in FM antenna for easy transportation
- Digital AM / FM tuner with LCD backlit display and 10 pre-sets (5 AM / 5 FM)
- Illuminated controls and dial for improved visibility in darkly lit spaces
- USB port enables convenient charging of mobile devices


**SPECIFICATIONS**

Battery Capacities:	40V max XGT
18V LXT / 12V max CXT Li-Ion	
Dimensions (L x W x H)	11" x 6-1/3" x 11-3/4" (280 mm x 171 mm x 298 mm)
Net Weight	9.5 lbs (4.3 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately.  
AC Adapter (SE00000681)

**Cordless or Electric Jobsite Radio**
**XGT**
**40V | 80V max**
**MR001G**
**Compatible With Makita 40V max XGT / 18V LXT /**
**12V CXT Batteries Or AC Power**

- Runs up to 30 hours on a single charge with 40V max XGT (4.0Ah) battery
- Delivers rich, full stereo sound from two powerful side-firing speakers
- Dust and water-resistant construction (IP65 rated) for improved operation in harsh job site conditions
- Rugged design with expanded rubber bumpers and front metal guard for maximum protection on the jobsite
- Folding carry handle with soft rubber grip and built in FM antenna for easy transportation
- Digital AM / FM tuner with LCD backlit display and 10 pre-sets (5 AM / 5 FM)
- Illuminated controls and dial for improved visibility in darkly lit spaces
- AUX-IN port for connecting to an external audio source
- Adjustable sleep timer with auto shut off feature


**SPECIFICATIONS**

Battery Capacities:	40V max XGT
18V LXT / 12V max CXT Li-Ion	
Dimensions (L x W x H)	11" x 6-1/3" x 11-3/4" (280 mm x 171 mm x 298 mm)
Net Weight	9.5 lbs (4.3 kg)

 STANDARD EQUIPMENT INCLUDES:  
Tool Only. Batteries and Charger Sold Separately.  
AC Adapter (SE00000457)

**Kettle**
**XGT**
**40V | 80V max**
**KT001GZ**
**A Convenient Way To Boil Water Whether On The Job Site Or Enjoying The Outdoors Or Anywhere!**

- Boils 0.8L (27 oz.) of water in 8 min. from 23°C with a 40V max 4.0Ah XGT battery (battery not included)
- Boil dry protection automatically turns the kettle off if there is not enough water.
- An Auto shut-off with a warning buzzer turns the kettle off when the water temperature reaches 100°C

**NEW**

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Tank Capacity	0.8 L
Overall Length	9-1/8" (233 mm)
Net Weight	4.7 lbs (2.1 kg)

**STANDARD EQUIPMENT INCLUDES:**  
Tool Only. Batteries and Charger Sold Separately.

**13" Portable Jobsite Fan**
**XGT**
**40V | 80V max**
**CF002GZ**
**Powerful And Portable Solution For Painters, Contractors, And More...**

- Blade design optimized for Quiet operation at just 52 dB(A) at High Setting
- Durable design with protective bumpers to withstand a job site environment
- Push button - ON / OFF & HIGH / MEDIUM / LOW for optimal velocity control
- Off-timer switch enables automatic shutdown after 1, 2 or 4 hours of runtime

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Continuous Run Time (with Battery BL4040):	
High:	320 mins
Medium:	640 mins
Low:	1,020 mins
Overall Length	10-1/4" (261 mm)
Net Weight	8.4 lbs (3.8 kg)

**STANDARD EQUIPMENT INCLUDES:**  
Tool Only. Batteries and Charger Sold Separately. AC Adapter (TE00000171)

**9-1/4" Fan**
**XGT**
**40V | 80V max**
**CF002GZ**
**Compact Fan Ideal For Increased Air Circulation Or Cooling On Jobsites**

- Compact 9-1/4" diameter fan produces high air volume for optimal performance
- Easily removable fan cover with single screw enables fast and easy blade cleaning
- Quiet operation at just 48 dB(A) due to redesigned rear fan cover
- Rubber bumpers protect tool and materials from damage
- Off-timer switch enables automatic shutdown after 1, 2 or 4 hours of runtime

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Continuous Run Time (with Battery BL4040):	
Low	1,055 mins
Medium	800 mins
High	600 mins
Overall Length	5-5/8" (143 mm)
Net Weight	4.5 lbs (2.0 kg)

**STANDARD EQUIPMENT INCLUDES:**  
Tool Only. Batteries and Charger Sold Separately. AC Adapter (TE00000170)

# LED Area Worklights

Supports Both Makita's 40V max XGT And 18V LXT Battery Platforms

## ML003G

- 2-mode operation: delivers 1,100 lumens on High mode or 450 lumens on Low mode
- Dust and water-resistant construction (IP65 rated) for improved operation in harsh job site conditions

### SPECIFICATIONS

Battery Capacities	40V max XGT 18 V LXT
--------------------	-------------------------

### Continuous Use with BL4040B:

- Approx. 10 Hours (High)
- Approx. 22 Hours (Low)

Luminous Flux: 1,100 lm (High)

450 lm (Low)

Overall Dimensions 9-3/4" x 11-3/4" x 11"

(249 mm x 298 mm x 280 mm)

Net Weight 7.5 lbs (3.4 kg)

### STANDARD EQUIPMENT INCLUDES:

Tool Only. Batteries and Charger Sold Separately.

## ML005GX

- Up to 3,600 lumens providing bright illumination for the darkest of workspaces
- Lampshade provides widespread illumination and reduces the glare of LED light and reduces multiple shadows

### SPECIFICATIONS

Battery Capacities	40V max XGT 18 V LXT
--------------------	-------------------------

### Continuous Use with BL4040B:

- Approx. 3.5 Hours (High)
- Approx. 7.5 Hours (Mid)
- Approx. 15 Hours (Low)

Luminous Flux: 3,600 lm (High)

1,800 lm (Mid) / 900 lm (Low)

Overall Dimensions 9-3/4" x 12-1/8" x 11-5/8"

(248 mm x 309 mm x 296 mm)

Net Weight 10.1 lbs (4.6 kg)

### STANDARD EQUIPMENT INCLUDES:

Tool Only. Batteries and Charger Sold Separately.

## ML009GX

- 3-mode operation: delivers 10,000 lumens on High, 4,000 lumens on Medium, and 2,000 lumens on Low
- Lampshade provides widespread illumination and reduces the glare of LED light and reduces multiple shadows

### SPECIFICATIONS

Battery Capacities	40V max XGT 18 V LXT
--------------------	-------------------------

### Continuous Use with BL4040B:

- Approx. 2.4 Hours (High)
- Approx. 6.5 Hours (Mid)
- Approx. 14 Hours (Low)

Luminous Flux: 10,000 lm (High)

4,000 lm (Mid) / 2,000 lm (Low)

Overall Dimensions 9-3/4" x 15-1/4" x 12"

(248 mm x 386 mm x 305 mm)

Net Weight 14.1 lbs (6.4 kg)

### STANDARD EQUIPMENT INCLUDES:

Tool Only. Batteries and Charger Sold Separately.



ML003G  
Up To  
1,100  
Lumens



ML005GX  
Up To  
3,600  
Lumens  
**NEW**



ML009GX  
Up To  
10,000  
Lumens  
**NEW**

## LED Spot-Light

### XGT 40V | 80V max

## ML007G

Makita 40V max XGT Cordless LED Spot-Light Illuminates Any Dark Area  
Up To 1,250 Lumens

- 4-mode operation: 600 lumens on Spot, 1,000 lumens on Flood, and 1,250 lumens on Spot/Flood, Strobe mode.
- Illuminates up to 700 yards in Spot and Spot / Flood Mode
- Compact and ergonomic design with a height of only 12-3/4"
- 90° pivoting head for user convenience
- Low battery level indicator automatically notifies the user about reduction in battery capacity with the decrease of illumination.

**NEW**  
Up To  
1,250  
Lumens



### XPT

STANDARD EQUIPMENT INCLUDES:  
Tool Only. Batteries and Charger Sold Separately.

### SPECIFICATIONS

Battery Capacities	40V max XGT
Continuous Use (with battery BL4040):	
Spot Brightness	
Spot Brightness	Approx. 10 Hours
Flood Brightness	Approx. 10 Hours
Spot + Flood Brightness	Approx. 7.5 Hours
Strobe Brightness	Approx. 10 Hours
Luminous Flux	1,250 / 1,000 / 600 lm
Overall Dimensions: (L x W x H)	12-3/4" x 4-3/4" x 4-5/8"
	(323 mm x 120 mm x 118 mm)
Net Weight	2.1 lbs (0.9 kg)

## LED Worklight

### XGT 40V | 80V max

## ML006GX

- Rotatable (left or right) and foldable head design enables flashlight to be positioned in numerous configurations for maximum versatility in a variety of applications
- Foldable head features 7 positive stops at 0°, 30°, 60°, 90°, 120°, 150°, 180°
- Features 18 LED's for maximum illumination
- 4 stage push button control for low (100 lm), medium (250 lm) or high (500 lm) brightness and OFF
- Over-discharge circuit protection prevents damage to battery caused by over-discharge of cells
- Retractable sky hook for added convenience

### SPECIFICATIONS

Battery Capacities	40V max XGT
--------------------	-------------

### Continuous Use:

High Brightness  
Approx. 20 Hours (with battery BL4040)

Medium Brightness  
Approx. 40 Hours (with battery BL4040)

Low Brightness  
Approx. 782 Hours (with battery BL4040)

Luminous Flux 500 / 250 / 100 lm

Overall Dimensions (L x W x H)

14" x 3-3/8" x 4-7/8"

(355 mm x 85 mm x 123 mm)

Net Weight (No Battery) 0.9 lbs. (0.41 kg)

### STANDARD EQUIPMENT INCLUDES:

Tool Only. Batteries and Charger Sold Separately.

**NEW**  
500  
Lumens



## LED Flashlight

### XGT 40V | 80V max

## ML001G

Pivoting Head Features 12 Positive Stops From 60° - 170°

- Features 4 x 0.5W LED's for maximum illumination
- Multi-faceted reflector provides clear round spot light with uniform brightness
- Removable strap hook for added convenience
- Ergonomic soft rubber grip design for comfortable operation



**160**  
Lumens

### XPT

STANDARD EQUIPMENT INCLUDES:  
Tool Only. Batteries and Charger Sold Separately.

### SPECIFICATIONS

Battery Capacities	40V max XGT
Continuous Run Time (with Battery BL4040)	
Approx. 55 Hours	
Luminous Flux	
160 lm	
Overall Dimensions	
11-1/4" x 3-1/2" x 5-3/8"	
(287 mm x 88 mm x 136 mm)	
Net Weight	
2.9 lbs. (1.3 kg) (with Battery BL4040)	

**2.0 gal. / 7.6L Air Compressor**
**XGT 40V | 80V max**
**AC001GZ**
**Makita's First CORDLESS AIR COMPRESSOR**
**Ideal For Use with Pneumatic Brad, Finish, Pin Nailers and Staplers**

- Ideal for indoor use, including trim, cabinetry, hobby and DIY applications
- Oil-free design requires no day to day maintenance and offers reduced operating costs
- Lower RPM operating speed generates less heat for maximum motor and pump life
- Air pressure regulator enables easy adjustment of line pressure
- Features 1 quick connect outlet
- Complete roll cage design protects battery, motor, pump and switch from damage during storage, transport and operation


**NEW**
**Oil-Free**
**STANDARD EQUIPMENT INCLUDES:**  
Tool Only. Batteries and Charger Sold Separately.

**SPECIFICATIONS**

Battery Capacities	40V max XGT
No Load Speed (Motor)	6,000 RPM
Pump	Oil-Free
Tank	2 gal (7.6 L)
Performance (90 PSI)	1.2 SCFM
Maximum Pressure	135 PSI
Dimensions	(L x W x H, with Handle Folded) 11-7/8" x 15-3/4" x 15" (302 mm x 402 mm x 382 mm)
Net Weight	20.8 lbs (9.4 kg)

**BL MOTOR**
**Turbo Blower**
**XGT 40V | 80V max**
**UB001GM101 UB001GZ**
**Up To 565 CFM At 143 MPH In Boost Mode**

- Variable speed control by dial with cruise control trigger for optimal air volume and velocity with reduced operator strain and fatigue
- Boost mode provides added force for blowing heavy or wet materials
- 3-stage telescopic long nozzle
- Best grip to frame angle provides optimum nozzle to ground angle for efficient sweeping operation
- Lightweight & compact for single handed operation
- Keyhole slot enables blower to be hung on wall in shop or garage
- May be used with optional Gutter Nozzle Kit, part no. 191B03-8


**BL MOTOR**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Maximum Air Volume	0 - 565 CFM (0 - 16.0 m³/min)
Maximum Air Velocity	0 - 143 MPH (64.0 m/sec)
No Load Speed:	
Boost Mode	0 - 22,000 RPM
Cruise Control Mode	0 - 20,000 RPM
Overall Length	33-1/2" - 37-1/2" (85 - 95 cm)
Net Weight	5.67 lbs (2.5 kg)

**STANDARD EQUIPMENT INCLUDES:**

**UB001GM101:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), Front Nozzle (413367-1), End Nozzle 80 (412758-3), Extension Nozzle (183P97-1), Flat Nozzle (183P98-9), Adapter Pipe (191L96-5), Shoulder Harness (166094-6)

**UB001GZ:** Tool Only. Batteries and Charger Sold Separately. Front Nozzle (413367-1), End Nozzle 80 (412758-3), Extension Nozzle (183P97-1), Flat Nozzle (183P98-9), Adapter Pipe (191L96-5), Shoulder Harness (166094-6)

## Rear Handle Chainsaws

**XGT 40V | 80V max**
**Fast, Variable Speed (0 - 5,020 Feet Per Minute). Power Equivalent To A 42cc Gasoline Chainsaw**

- Wet Guard offers maximum protection in wet environments • Built-in LED On / Off Switch with Auto Power-Off function; for Extended Battery Life
- Front Hand Guard Chain Brake for Operator Safety in case of Accidental Kickback
- Low Noise Level at only 104 dB(A) and Zero Emissions for Operator Comfort

**BL MOTOR**
**14" Rear Handle Chainsaw**
**UC015GT101 UC015GZ**
**Tool-less Chain Tensioner**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Guide Bar Length	14" (35 cm)
Chain Pitch / Gauge	0.325" / 43G
Chain Speed	0 - 5,020 FPM (0 - 1,530 m/min)
Overall Length	17-1/2" (44.5 cm)
Net Weight	9.9 lbs (4.5 kg)

**STANDARD EQUIPMENT INCLUDES:**

**UC015GT101:** 40V max XGT Battery (5.0Ah) BL4050F, Rapid Charge (DC40RA), Battery Cover (412393-7), 14" Chain (191T91-3), 14" Guide Bar (191T87-4), Chain Cover (191288-5), Spike Bumper (347925-0), Wrench 13-16 (782023-7), Oil Supply (199897-3)

**UC015GZ:** Tool Only. Batteries and Charger Sold Separately. 14" Chain (191T91-3), 14" Guide Bar (191T87-4), Chain Cover (419288-5), Spike Bumper (347925-0), Wrench 13-16 (782023-7), Oil Supply (199897-3)

**16" Rear Handle Chainsaw**
**UC012GZ**
**Captive Bar Nuts**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	0.325" / 43G
Chain Speed	0 - 5,020 FPM (0 - 1,530 m/min)
Overall Length	17-1/2" (44.5 cm)
Net Weight	9.9 lbs (4.5 kg)

**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately. 16" Chain (191T92-1), 16" Guide Bar (191T88-2), Chain Cover (419242-3), Spike Bumper (347925-0), Wrench 13-16 (782023-7), Oil Supply (199897-3)

**16" Rear Handle Chainsaw**
**UC016GT101 UC016GZ**
**Tool-less Chain Tensioner**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	0.325" / 43G
Chain Speed	0 - 5,020 FPM (0 - 1,530 m/min)
Overall Length	17-1/2" (44.5 cm)
Net Weight	9.9 lbs (4.5 kg)

**STANDARD EQUIPMENT INCLUDES:**

**UC016GT101:** 40V max XGT Battery (5.0Ah) BL4050F, Rapid Charge (DC40RA), Battery Cover (412393-7), 16" Chain (191T92-1), 16" Guide Bar (191T88-2), Chain Cover (419242-3), Spike Bumper (347925-0), Wrench 13-16 (782023-7), Oil Supply (199897-3)

**UC016GZ:** Tool Only. Batteries and Charger Sold Separately. 16" Chain (191T92-1), 16" Guide Bar (191T88-2), Chain Cover (419242-3), Spike Bumper (347925-0), Wrench 13-16 (782023-7), Oil Supply (199897-3)

**UC015GT101**

**NEW**

## Top Handle Chainsaws

**XGT 40V | 80V max**
**Fast, Variable Speed (0-4,880 Feet Per Minute). Power Equivalent To A 32cc Gasoline Chainsaw**

- Variable speed control by trigger • Electric chain brake • Kickback brake • Chain oil adjustment • Oil Capacity Display window • Compact & Lightweight
- Captive nuts: prevent loss of nut when removing sprocket cover to replace guide bar or saw chain
- Hanging hook • Main power switch with auto power-off function

**BL MOTOR**
**12" Top Handle Chainsaw**
**UC003GM101 UC003GZ**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Guide Bar Length	12" (30 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 4,880 FPM (0-1,490 m/min)
Overall Length	10-1/2" (26.6 cm)
Net Weight	7.5 lbs (3.4 kg)

**STANDARD EQUIPMENT INCLUDES:**

**UC003GM101:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charge (DC40RA), Battery Cover (412393-7), 12" Chain (191H01-8), 12" Guide Bar (191G15-1), Chain Cover (419288-5), Spike Bumper (346809-9), Wrench 13-16 (782023-7), Oil Supply (199897-3)

**UC003GZ:** Tool Only. Batteries and Charger Sold Separately.

12" Chain (191H01-8), 12" Guide Bar (191G15-1), Chain Cover (419288-5), Spike Bumper (346809-9), Wrench 13-16 (782023-7), Oil Supply (199897-3)

**14" Top Handle Chainsaw**
**UC004GM101 UC004GZ**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Guide Bar Length	14" (35 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 4,880 FPM (0-1,490 m/min)
Overall Length	10-1/2" (26.6 cm)
Net Weight	7.5 lbs (3.4 kg)

**STANDARD EQUIPMENT INCLUDES:**

**UC004GM101:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charge (DC40RA), Battery Cover (412393-7), 14" Guide Bar (191H02-6), 14" Chain (191G16-9), Chain Cover (419288-5), Spike Bumper (346809-9), Wrench 13-16 (782023-7), Oil Supply (182229-1)

**UC004GZ:** Tool Only. Batteries and Charger Sold Separately.

14" Guide Bar (191H02-6), 14" Chain (191G16-9), Chain Cover (419288-5), Spike Bumper (346809-9), Wrench 13-16 (782023-7), Oil Supply (182229-1)

**16" Top Handle Chainsaw**
**UC005GM101 UC005GZ**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 4,880 FPM (0-1,490 m/min)
Overall Length	10-1/2" (26.6 cm)
Net Weight	7.5 lbs (3.4 kg)

**STANDARD EQUIPMENT INCLUDES:**

**UC005GM101:** 40V max XGT Battery (4.0Ah) BL4040, Rapid Charge (DC40RA), Battery Cover (412393-7), 16" Chain (191H03-4), 16" Guide Bar (191G17-7), Chain Cover (419242-9), Spike Bumper (346809-9), Wrench 13-16 (782023-7), Oil Supply (182229-1)

**UC005GZ:** Tool Only. Batteries and Charger Sold Separately.

16" Chain (191H03-4), 16" Guide Bar (191G17-7), Chain Cover (419242-9), Spike Bumper (346809-9), Wrench 13-16 (782023-7), Oil Supply (182229-1)

**Designed For The Professional Arborist That Requires A Compact And Powerful Saw**


**NEW**

**10" Telescopic Pole Chain Saw**

UA002GM101 UA002GZ

**Excellent Tool Balance Featuring Lightweight Cutting Head For Easy Control And Maneuverability**

- Powered by 40V max XGT battery
- Can reach up to 13'
- Slim saw head allows accessibility in tight areas
- Integrated branch hook provides support for cutting or clearing branches
- Captive bar nut prevents loss when removing sprocket cover for replacement of saw chain or guide bar
- Easily check bar oil level through translucent tank

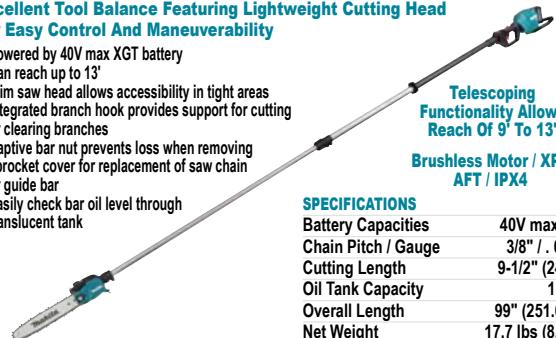

**Telescoping Functionality Allows Reach Of 9' To 13'**  
**Brushless Motor / XPT AFT / IPX4**

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Chain Pitch / Gauge	3/8" / .0043"
Cutting Length	9-1/2" (24 cm)
Oil Tank Capacity	160 ml
Overall Length	99" (251.6 cm)
Net Weight	17.7 lbs (8.0 kg)

**BL MOTOR XPT AFT****STANDARD EQUIPMENT INCLUDES:**

UA002GM101: 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), 10" Chain (199075-5), 10" Guide Bar (161846-0), Guide Bar Case (458501-6), Shoulder Harness (191K37-5), Oil Supply (182229-1), Wrench 13-16 (782023-7), Hex Wrench 4 (783202-0)


UA002GZ: Tool Only, Batteries and Charger Sold Separately, 10" Chain (199075-5), 10" Guide Bar (161846-0), Guide Bar Case (458501-6), Shoulder Harness (191K37-5), Oil Supply (182229-1), Hex Wrench 4 (783202-0)

**10" Pole Chain Saw**

UA001GM101 UA001GZ

**Excellent Tool Balance Featuring Lightweight Cutting Head For Easy Control And Maneuverability**

- Powered by 40V max XGT battery
- Slim saw head allows accessibility in tight areas
- Integrated branch hook provides support for cutting or clearing branches
- Captive bar nut prevents loss when removing sprocket cover for replacement of saw chain or guide bar
- Easily check bar oil level through translucent tank with recessed cap to protect from damage or accidental branch hang-ups

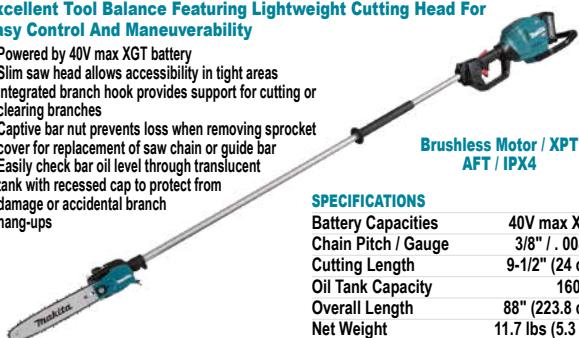

**Brushless Motor / XPT AFT / IPX4**

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Chain Pitch / Gauge	3/8" / .0043"
Cutting Length	9-1/2" (24 cm)
Oil Tank Capacity	160 ml
Overall Length	88" (223.8 cm)
Net Weight	11.7 lbs (5.3 kg)

**BL MOTOR XPT AFT****STANDARD EQUIPMENT INCLUDES:**

UA001GM101: 40V max XGT Battery (4.0Ah) BL4040, Rapid Charger (DC40RA), Battery Cover (412393-7), 10" Chain (199075-5), 10" Guide Bar (161846-0), Guide Bar Case (458501-6), Shoulder Harness (191K37-5), Oil Supply (182229-1), Wrench 13-16 (782023-7), Hex Wrench 4 (783202-0)

UA001GZ: Tool Only, Batteries and Charger Sold Separately, 10" Chain (199075-5), 10" Guide Bar (161846-0), Guide Bar Case (458501-6), Shoulder Harness (191K37-5), Oil Supply (182229-1), Wrench 13-16 (782023-7)

## Hedge Trimmers

**XGT 40V | 80V max****3-Speed, Reversible, Electric Brake, Constant Speed Control****BL MOTOR**

- Sharp curved edge blade features inclined/curved tooth to easily catch and hold branches with reduced friction resistance for maximum energy efficiency (UH005GZ, UH004GZ only)
- Sharp edge blade features inclined / curved tooth to easily catch and hold branches (UH006GZ only)
- Standard blade with dual cutting action cuts quickly with shearing effect (UH008GZ only)
- 3-speed range enables operator to adjust cutting speed based on materials or application
- Constant speed control feature maintains cutting speed under heavy load



Features Sharp Curved Edge Blade For Trimming Thin Branches Up To 15/16"  
 Use With Optional Chip Receiver (191R52-1) For Easy Leaf, Twig And Debris Collection



Features Sharp Curved Edge Blade For Trimming Thin Branches Up To 15/16"  
 Use With Optional Chip Receiver (191R51-3) For Easy Leaf, Twig And Debris Collection



Features Sharp Edge Blade For Rough Cutting Of Thick Branches Up To 1"  
 Use With Optional Chip Receiver (191R51-3) For Easy Leaf, Twig And Debris Collection



Features Standard Blade For Trimming Thin Branches Up To 7/8"  
 Use With Optional Chip Receiver (191R1-3) For Easy Leaf, Twig And Debris Collection

**30" Hedge Trimmer**  
**UH005GZ****SPECIFICATIONS**

Battery Capacities	40V max XGT
Strokes Per Minute (min <sup>-1</sup> )	2,000 / 3,600 / 5,000 SPM
Cutting Length	30" (75 cm)
Max. Cutting Thickness	15/16" (23.5 mm)
Overall Length	49-3/4" (126.3 cm)
Net Weight	8.4 lbs (3.8 kg)

**STANDARD EQUIPMENT INCLUDES:**  
 Tool Only, Batteries and Charger Sold Separately.  
 Shear Blade Set (191R54-7), Blade Cover (412912-9)

**24" Hedge Trimmer**  
**UH004GZ****SPECIFICATIONS**

Battery Capacities	40V max XGT
Strokes Per Minute (min <sup>-1</sup> )	2,000 / 3,600 / 5,000 SPM
Cutting Length	24" (60 cm)
Max. Cutting Thickness	15/16" (23.5 mm)
Overall Length	44" (112 cm)
Net Weight	7.9 lbs (3.6 kg)

**STANDARD EQUIPMENT INCLUDES:**  
 Tool Only, Batteries and Charger Sold Separately.  
 Shear Blade Set (191R53-9), Blade Cover (412911-1)

**24" Hedge Trimmer**  
**UH006GZ****SPECIFICATIONS**

Battery Capacities	40V max XGT
Strokes Per Minute (min <sup>-1</sup> )	2,000 / 3,000 / 4,000 SPM
Cutting Length	24" (60 cm)
Max. Cutting Thickness	1" (25 mm)
Overall Length	44-1/4" (112.3 cm)
Net Weight	8.1 lbs (3.7 kg)

**STANDARD EQUIPMENT INCLUDES:**  
 Tool Only, Batteries and Charger Sold Separately.  
 Shear Blade Set (191R55-5), Blade Cover (412911-1)

**24" Hedge Trimmer**  
**UH008GZ****SPECIFICATIONS**

Battery Capacities	40V max XGT
Strokes Per Minute (min <sup>-1</sup> )	2,000 / 3,600 / 5,000 SPM
Cutting Length	24" (60 cm)
Max. Cutting Thickness	7/8" (21.5 mm)
Overall Length	44" (112 cm)
Net Weight	7.9 lbs (3.6 kg)

**STANDARD EQUIPMENT INCLUDES:**  
 Tool Only, Batteries and Charger Sold Separately.  
 Shear Blade Set (191R57-1), Blade Cover (412912-9)

## Split Shaft Power Unit

**XGT 40V | 80V max****UX01GZ UX01GZ02 (Includes 16-1/2" Line Trimmer Attachment EM405MP)****Power Unit Is Part Of The Makita Split Shaft Multi Tool System**

- Use with up to 14 different attachments, including line trimmers, pole saws, hedge trimmers, and more
- 3-speed options (Low: 5,700 RPM, Medium: 8,200 RPM, High: 9,700 RPM) for active power management
- IPX4 rated for maximum weather and water resistance
- Variable 3-speed push-button control enables operator to adjust speed based on different attachments or applications.
- Reverse mode for clearing entangled debris from the cutting head
- Electric brake for increased operator safety
- Soft start feature gradually increases speed to eliminate start up shock
- Constant speed control maintains speed under heavy loads
- Features Star Protection with 3 Active Controls for Current, Voltage & Temperature in case of overload

**SPECIFICATIONS**

Battery Capacities	40V max XGT
No Load Speed:	High / Medium / Low 0 - 9,700 / 0 - 8,200 / 0 - 5,700 RPM
Overall Length	39-1/2" (100 cm)
Net Weight	8.6 lbs (3.9 kg)

**BL MOTOR XPT AFT****STANDARD EQUIPMENT INCLUDES:**

UX01GZ: Tool Only, Batteries and Charger Sold Separately. Shoulder Harness (127759-5), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

UX01GZ02: Tool Only, Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (191R00-0), Shoulder Harness (127759-5), Hex Wrench 4 (783202-0), Box Wrench 17 (782238-6), Accessory Bag (831304-7), Line Trimmer Attachment (EM405MP)

**Tool-Less Release System For Quick Disconnect Of Attachments**

Refer To [makita.ca](http://makita.ca) For Split Shaft Power Unit Attachment Specifications

**10" Brush Cutter (Bike Handle)**
**UR012GZ01**
**Power Equivalent To A 40cc Gas Model**

- Powered by two 40Vmax XGT Li-Ion batteries in series
- Electronic current limiter for overload protection
- Electric brake • Electronic 3-speed (Hi / Med / Low)
- Variable speed control • Soft start
- Constant speed control
- Reverse switch for easy removal of grass clippings stuck
- IPX4 level water resistant
- Compatible with a variety of blades
- Offset bike handle
- Low noise level for comfortable working
- Applicable to heavy-duty operation due to high output power similar to 40cc class engine


**SPECIFICATIONS**

Battery Capacities	Two 40V max XGT
No Load Speed	0 - 3,500 / 0 - 5,000 / 0 - 6,400 RPM
Cutting Width	10" (25.5 cm)
Overall Length	70-1/2" (179 cm)
Net Weight	14.9 lbs (6.7 kg)

**BL MOTOR AFT ADT**
**STANDARD EQUIPMENT INCLUDES:**

Tool Only, Batteries and Charger Sold Separately, Brush Cutter Blade 4T (B-14124), Tool Cover (456924-2), Shoulder Harness (122A37-4), Hex Wrench 4 (783202-0), Hex Wrench 5 (783217-7), Accessory Bag (831304-7), Wire Clamp (455588-9), Box Wrench 17 (782238-6)

**17" Line Trimmer (Loop Handle)**
**UR008GT101 UR008GZ01**
**Heavy Duty Trimming Power Equivalent To A 30cc Gas Model**

- Powered by a 40V max XGT battery
- Automatic Torque Drive Technology (ADT) mode automatically shifts from 4,000-6,000 RPM for extended run time or added power
- 3 speed options (Low: 4,000 RPM, Medium: 4,600 RPM, High: 6,000 RPM) for power management
- Reverse rotation function allows operator to quickly clear trimmer head of entangled grass and weeds

**NEW**
**BL MOTOR XPT AFT ADT**
**STANDARD EQUIPMENT INCLUDES:**

UR008GT101: 40V max XGT Battery (5.0Ah) BL4050F, Rapid Charger (DC40RA), Battery Cover (412393-7), Bump & Feed Trimmer Head (191R00-0), Protective Guard (191B55-9), Shoulder Harness (127759-5), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

UR008GZ01: Tool Only, Batteries and Charger Sold Separately, Bump & Feed Trimmer Head (191R00-0), Protective Guard (191B55-9), Shoulder Harness (127759-5), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

**15" Line Trimmer (Bike Handle)**
**UR002GZ**
**Features A Bike Handle Design**
**For Improved Grip**

- Powered by a 40V max XGT battery
- Makita-built Outer Rotor BL Brushless Motor direct-drive system provides high power and increased torque
- Automatic Torque Drive Technology (ADT) mode automatically shifts from 3,500-6,500 RPM for extended run time or added power
- 3 speed options (Low: 3,500 RPM, Medium: 5,300 RPM, High: 6,500 RPM) for power management
- Reverse rotation function allows operator to quickly clear trimmer head of entangled grass and weeds


**SPECIFICATIONS**

Battery Capacities	40V max XGT
No Load Speed	0 - 3,500 / 0 - 5,300 / 0 - 6,500 RPM
Cutting Width	15" (38 cm)
Overall Length	68-1/4" (173 cm)
Net Weight	8.7 lbs (3.9 kg)

**BL MOTOR XPT AFT ADT**
**STANDARD EQUIPMENT INCLUDES:**

Tool Only, Batteries and Charger Sold Separately, Bump & Feed Trimmer Head (197296-3), Protective Guard (459504-3), Shoulder Harness (122906-3), Hex Wrench 5 (783217-7), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

**9" Brush Cutter (Bike Handle)**
**UR006GT101 UR006GZ01**
**Features A Bike Handle Design  
For Improved Grip**

- Powered by a 40V max XGT battery
- Makita-built Outer Rotor BL Brushless Motor direct-drive system provides high power and increased torque
- Automatic Torque Drive Technology (ADT) mode automatically shifts from 4,600-7,000 RPM for extended run time or added power
- 3 speed options (Low: 4,600 RPM, Medium: 5,500 RPM, High: 7,000 RPM) for power management
- Reverse rotation function allows operator to quickly clear trimmer head of entangled grass and weeds

**NEW**
**BL AFT ADT**
**9" Brush Cutter (Bike Handle)**
**UR006GT101 UR006GZ01**
**Brushless Motor AFT / ADT**
**XGT 40V | 80V max**
**SPECIFICATIONS**

Battery Capacities	40V max XGT
No Load Speed	0 - 4,600 / 0 - 5,500 / 0 - 7,000 RPM
Cutting Width	9" (230 mm) with 4 Tooth Blade
Overall Length	71-1/2" (181.5 cm)
Net Weight	10.8 lbs (4.8 kg)

**15" Line Trimmer (Loop Handle)**
**UR003GZ**
**3-Speed Options (Low: 3,500 Rpm, Medium: 5,300 Rpm, High: 6,500 Rpm) For Power Management**

- Makita built outer rotor brushless direct drive system provides high power and speed
- Includes bump and feed trimmer head with 0.080" twisted quiet line
- Reverses mode for clearing entangled debris from the cutting head
- Battery guard protects batteries from accidental bumps & bangs and acts as a secondary handle
- LED charge level indicator display approximate remaining battery power
- Main power switch with auto-off function conserves battery power when not in use

**SPECIFICATIONS**

Battery Capacities	40V max XGT
No Load Speed	High / Medium / Low
	3,500 / 5,300 / 6,500 RPM
Cutting Width	15" (38 cm)
Overall Length	68-1/4" (176 cm)
Net Weight	7.6 lbs (3.4 kg)

**BL AFT ADT**
**STANDARD EQUIPMENT INCLUDES:**

Tool Only, Batteries and Charger Sold Separately, Bump & Feed Trimmer Head (197296-3), Protective Guard (459504-3), Shoulder Harness (122906-3), Box Wrench 16-1/2" (783013-3), Hex Wrench 4 (783202-0), Hex Wrench 5 (783217-7), Accessory Bag (831304-7)

**2.0L Backpack Vacuum Cleaner w/AWS**
**VC009GZ02**
**Increased Suction Power, Low Noise Level**

- 3 power modes
- Power mode pre-selection (with mode memory function)
- Anti-close mechanism for paper dust bag installation. (when the filter bag/dust bag is not installed in the cleaner the front cover does not close completely)

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Container Capacity:	
Filter Bag:	2.0 L
Dust Bag:	1.5 L
Continuous Use with BL4050F:	
Approx. 30 minutes (Mode 2)	
Approx. 55 minutes (Mode 1)	
Maximum Air Flow	67.1 CFM (1.9 m <sup>3</sup> /min)
Power:	165 W (Max) / 85 W (High) / 45 W (Normal)
Static Water Lift	72.3" (183 cm)
Overall Dimensions (L x W x H)	9-1/8" x 5-7/8" x 14-3/4" (233 mm x 150 mm x 375 mm)
Net Weight	7.5 lbs (3.4 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT HEPA filter AWS**
**Bluetooth**
**STANDARD EQUIPMENT INCLUDES:**

Tool Only, Batteries and Charger Sold Separately, Filter (191Y27-2), 1-1/8" X 5' Hose With Front Cuffs 22 And 38 (A-34235), Hose Band (166116-2), Paper Filter Bag (197903-8), Front Cuff 22 (195547-8), Front Cuff 24 (195546-2), Two Auto-start Wireless System (AWS) Bluetooth Transmitter (199901-5), Backpack Shoulder Harness (162387-8), Harness Cover (191Y14-1)

**2.0L Backpack Vacuum Cleaner****XGT** 40V | 80V max**VC008GT101** ■ **VC008GZ01****Powered By 40V max XGT Battery For Up To 110 Min Run Time**

- High power output up to 195 watts
- 4 power modes
- LED job light for low light applications
- HEPA filter
- Power mode pre-selection with mode memory function

**NEW****BL XPT HEPA filter****STANDARD EQUIPMENT INCLUDES:**

**VC008GT101:** 40V max XGT Battery (5.0Ah) BL4050F, Rapid Charger (DC40RA), Filter (191Y27-2), 1-1/4" X 3' Hose (199453-9), Hose Band (166116-2), Floor Nozzle (191G86-8), Corner Nozzle (198919-6), Telescopic Pipe (140G19-0), Bent Pipe (140G26-3), Paper Filter Bag (197903-8), Dust Bag (197895-5), Backpack Shoulder Harness (162B36-0), Harness Cover (191Y14-1)

**VC008GZ01:** Tool Only. Batteries and Charger Sold Separately, Filter (191Y27-2), 1-1/4" X 3' Hose (199453-9), Hose Band (166116-2), Floor Nozzle (191G86-8), Corner Nozzle (198919-6), Telescopic Pipe (140G19-0), Bent Pipe (140G26-3), Paper Filter Bag (197903-8), Dust Bag (197895-5), Backpack Shoulder Harness (162B36-0), Harness Cover (191Y14-1)

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Container Capacity:	
Filter Bag:	2.0 L
Dust Bag:	1.5 L
Continuous Use with BL4050F:	
Approx. 14 minutes (Mode 4)	
Approx. 30 minutes (Mode 3)	
Approx. 55 minutes (Mode 2)	
Approx. 110 minutes (Mode 1)	
Maximum Air Flow	84.8 CFM (2.4 m³/min)
Power:	195 W (Mode 4) / 100 W (Mode 3)
	55 W (Mode 2) / 25 W (Mode 1)
Static Water Lift	72.3" (183 cm)
Dimensions (L x W x H)	
	9-1/8" x 5-7/8" x 14-3/4"
	(233 mm x 150 mm x 375 mm)
Net Weight	7.5 lbs (3.4 kg)

**8.0 L Dry Vacuum Cleaner****XGT** 40V | 80V max**VC005GLZ01****Powered By 2 40V max XGT Batteries. Automatically Switches To The Second Battery When The First Battery Runs Out**

- 8L large tank capacity enables continuous cleaning
- Variable suction power control dial allows for a wide range of applications from 'high power' to 'quiet' cleaning

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Container Capacity	8 L
Continuous Use with BL4050F:	
Dial 1: 220 minutes	
Dial 5: 28 minutes	
Maximum Air Flow	95.35 CFM
Power	265 W
Static Water Lift	92.4" (234 cm)
Dimensions (L x W x H)	
	14-3/8" x 13-1/8" x 15-5/8"
	(366 mm x 334 mm x 397 mm)
Net Weight	15.9 lbs (7.2 kg)

**BL XPT****STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately, Floor Nozzle (199454-7), 1-1/4" X 5-1/2" Hose (199493-7), Poly Bag (10 / Pk) (195432-5), Telescopic Pipe (140G19-0), Bent Pipe (140G26-3), Corner Nozzle (198919-6), Cloth Filter (191V71-1), Multi-Hook (413B37-4)

**NEW****250 ml Cyclone Stick Vacuum Cleaners****XGT** 40V | 80V max**CL003GA101 (Teal)****CL003GZ (Teal)****CL003GZ04 (Black)****Increased Compactness Achieved By A New Cyclone Unit Integrated Onto The Cleaner's Main Body**

- With the new cyclone unit the filter clogging is suppressed by separating fine dust particles from the air with centrifugal force in the cyclone unit.
- Low noise level for comfortable working.
- 4-mode suction power selection with mode memory function
- LED job light

**BL**  
**MOTOR****NEW****STANDARD EQUIPMENT INCLUDES:**

**CL003GA101:** 40V max XGT Battery (2.0Ah) BL4020, Rapid Charger (DC40RC), Battery Cover (412393-7), Floor Nozzle (127827-4), Sash Nozzle (413859-0), Pipe (459356-2), Sash Nozzle Holder (459355-4), High Efficiency Filter (1910C7-9), Sponge Filter (422908-2), Pre-filter (413H29-9), Strap (163400-6)

**CL003GZ:** Tool Only. Batteries and Charger Sold Separately, Floor Nozzle (127827-4), Sash Nozzle (413859-0), Pipe (459356-2), Sash Nozzle Holder (459355-4), High Efficiency Filter (1910C7-9), Sponge Filter (422908-2), Pre-filter (413H29-9), Strap (163400-6)

**CL003GZ04:** Tool Only. Batteries and Charger Sold Separately, Floor Nozzle (127828-2), Sash Nozzle (413809-5), Pipe (458942-6), Sash Nozzle Holder (459038-6), High Efficiency Filter (1910C7-9), Sponge Filter (422908-2), Pre-filter (413H29-9), Strap (163400-6)

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Container Capacity	250 ml
Continuous Use with BL4020:	
1 (Quiet mode)	Approx. 80 min
2 (Normal Speed Mode)	Approx. 40 min
3 (High Speed Mode)	Approx. 25 min
4 (Max Speed Mode)	Approx. 16 min
Maximum Air Flow	35 CFM
Power:	
1 (Quiet mode)	15 W
2 (Normal Speed Mode)	35 W
3 (High Speed Mode)	60 W
4 (Max Speed Mode)	100 W
Static Water Lift	80.4" (204 cm)
Overall Length	43-1/2" (1,106 mm)
Net Weight	4.2 lbs (1.9 kg)

**STANDARD EQUIPMENT INCLUDES:**

**CL001GD106:** 40V max XGT Battery (2.5Ah) BL4025, Rapid Charger (DC40RA), Battery Cover (412393-7), Floor Nozzle (127828-2), Sash Nozzle (413809-5), Sash Nozzle Holder (459038-6), Pipe (459342-6), High Efficiency Filter (199966-0)

**CL001GZ01:** Tool Only. Batteries and Charger Sold Separately, Floor Nozzle (127827-4), Sash Nozzle (413859-0), Sash Nozzle Holder (459355-4), Pipe (459356-2), High Efficiency Filter (199966-0)

**CL001GZ04:** Tool Only. Batteries and Charger Sold Separately, Floor Nozzle (127828-2), Sash Nozzle (413809-5), Sash Nozzle Holder (459038-6), Pipe (459342-6), High Efficiency Filter (199966-0)

**15.0 L Dry Vacuum Cleaner w/AWS****XGT** 40V | 80V max**VC004GLZ02****Powered By 2 40V max XGT Batteries. Automatically Switches To The Second Battery When The First Battery Runs Out**

- 15L (4.0 Gal) large tank capacity enables continuous cleaning
- AWS (Auto-Start Wireless System) uses Bluetooth technology to communicate between tool and vacuum and enable wireless control when used with Makita AWS cordless tool
- Variable suction power control dial allows for a wide range of applications from 'high power' to 'quiet' cleaning
- For dry vacuum cleaning
- IPX4 level water resistant
- Compatible with paper dust bag

**NEW**  
**HEPA filter****SPECIFICATIONS**

Battery Capacities	40V max XGT
Container Capacity	15.0 L
Continuous Use with BL4050F:	
Dial 1: 220 Minutes	
Dial 5: 28 Minutes	
Maximum Air Flow	95.35 CFM - Hose End
	148 CFM - Turbine End
Hose Diameter	1-1/2" Exterior (The Outer Diameter Of The Hose)
Power	205 W
Static Water Lift	92.4" (234 cm)
Dimensions (L x W x H)	
	14-3/8" x 13-1/8" x 18-3/4"
	(366 mm x 334 mm x 475 mm)
Net Weight	17.5 lbs (7.9 kg)

Bluetooth is a registered trademark of Bluetooth SIG

**BL XPT AWS** **Bluetooth****STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately, 1-1/8" x 11-1/2" Hose With Front Cuffs 22, 24 And 38 (195433-3), Front Cuff 22 (195547-5), Front Cuff 24 (195546-0), Poly Bag (10 / Pk) (195432-5), HEPA Filter (191V70-3), Damper (191V68-0), Pre-filter (191V69-8), Two Auto-start Wireless System (AWS) Bluetooth Transmitter (19801-5), Multi-Hook (413B37-4)

**8.0 L Wet & Dry Vacuum Cleaner****XGT** 40V | 80V max**VC001GLZ****Powered By 2 40V max XGT Batteries. Automatically Switches To The Second Battery When The First Battery Runs Out**

- 8L large tank capacity enables continuous cleaning
- Variable suction power control dial allows for a wide range of applications from 'high power' to 'quiet' cleaning

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Container Capacity:	8 L (Dry), 6 L (Wet)
Continuous Use with BL4050F:	
Dial 1: 220 Minutes	
Dial 5: 28 Minutes	
Maximum Air Flow	99 CFM with BL4050F
Power	265 W
Static Water Lift	92.4" (234 cm)
Dimensions (L x W x H)	
	14-3/8" x 13-1/8" x 16-3/4"
	(366 mm x 334 mm x 425 mm)
Net Weight	16.4 lbs (7.4 kg)

**STANDARD EQUIPMENT INCLUDES:**

Tool Only. Batteries and Charger Sold Separately, Floor Nozzle (191G86-8), 1-1/4" X 5-1/2" Hose (199493-7), Poly Bag (10 / Pk) (195432-5), Telescopic Pipe (140G19-0), Bent Pipe (140G26-3), Corner Nozzle (198919-6), Cloth Filter (144625-1), Multi-Hook (413B37-4)

**730 ml Stick Vacuum Cleaners****XGT** 40V | 80V max**CL001GD106 (Teal)****CL001GZ01 (Teal)****CL001GZ04 (Black)****Powerful, Lightweight, and Compact Vacuum Cleaner for Professional or Domestic Use**

- 4-speed power selection (Max / High / Medium / Quiet) for efficient operation
- Click locking mechanism for secure attachment of pipe and other accessories

**40V XGT Stick Vacuum Cleaner, 125W, 4 Speed, w/ Push Button**

**SPECIFICATIONS**

Battery Capacities	40V max XGT
Container Capacity	730 ml
Continuous Use with BL4025	
Approx. 16 minutes (Max Speed Mode)	
Approx. 25 minutes (High Speed Mode)	
Approx. 40 minutes (Normal Speed Mode)	
Approx. 80 minutes (Quiet mode)	
Maximum Air Flow	42 CFM
Power	Max speed mode: 125 W High speed mode: 70 W Normal speed mode: 45 W Quiet mode: 25 W
Static Water Lift	84.4" (214 cm)
Overall Length	42" (106 cm)
Net Weight	2.3 lbs (1.0 kg)

**STANDARD EQUIPMENT INCLUDES:**

**CL001GD106:** 40V max XGT Battery (2.5Ah) BL4025, Rapid Charger (DC40RA), Battery Cover (412393-7), Floor Nozzle (127828-2), Sash Nozzle (413809-5), Sash Nozzle Holder (459038-6), Pipe (459342-6), High Efficiency Filter (199966-0)

**CL001GZ01:** Tool Only. Batteries and Charger Sold Separately, Floor Nozzle (127827-4), Sash Nozzle (413859-0), Sash Nozzle Holder (459355-4), Pipe (459356-2), High Efficiency Filter (199966-0)

**CL001GZ04:** Tool Only. Batteries and Charger Sold Separately, Floor Nozzle (127828-2), Sash Nozzle (413809-5), Sash Nozzle Holder (459038-6), Pipe (459342-6), High Efficiency Filter (199966-0)



**NEW**  
**DK0179G701**

**7 PC**

**DK0179G701**

Brushless 1/4" Impact Driver (TD001GZ)  
Brushless 1/2" Hammer Drill-Driver HP001GZ  
Brushless Reciprocating Saw (JR001GZ)  
Brushless 5" Angle Grinder (GA005GZ)  
Brushless 1/2" Impact Wrench (TW004GZ)  
Brushless 7-1/4" Circular Saw (HS003GZ)

**XGT** 40V | 80V max

**BL**  
MOTOR

LED Flashlight (ML001G)  
Two 40V max XGT Batteries (4.0Ah)  
Rapid Charger (DC40RA)  
LXT Battery Adapter / DC40RA (APD10)  
Tool Bag (832366-8)

**4 PC**

**DK0127G401**

Brushless 1/4" Impact Driver (TD001GZ)  
Brushless 1/2" Hammer Drill-Driver (HP001GZ)

Brushless 7-1/4" Circular Saw (HS003GZ)  
Brushless Reciprocating Saw (JR001GZ)

Two 40V max XGT Batteries (4.0Ah)  
Rapid Charger (DC40RA)

**XGT** 40V | 80V max

**BL**  
MOTOR



**2 PC**

**DK0114G210**

Brushless 1/4" Impact Driver (TD001GZ)  
Brushless 1/2" Hammer Drill-Driver (HP001GZ)  
Two 40V max XGT Batteries (4.0Ah and 2.5Ah)  
Rapid Charger (DC40RA)

**XGT** 40V | 80V max

**BL**  
MOTOR

**DK0139G203**

**2 PC**

**DK0139G203**

Brushless 3/4" Impact Wrench (TW001GZ)  
Brushless 5" Angle Grinder (GA013GZ)  
Two 40V max XGT Batteries (4.0Ah)  
Rapid Charger (DC40RA)

**XGT** 40V | 80V max

**BL**  
MOTOR



**NEW**  
**DK0114G210**

# GOING BEYOND LIMITS



## HIGHER OUTPUT POWER

UP TO 2X LONGER RUN TIME



2.5 Ah BATTERY



4.0 Ah BATTERY



5.0 Ah BATTERY

8.0 Ah BATTERY

## COMPACT SIZE

### BL4025

40V max XGT Battery (2.5Ah)

**28 MIN.  
CHARGE TIME**



### BL4040

40V max XGT Battery (4.0Ah)

**45 MIN.  
CHARGE TIME**



### BL4050F

40V max XGT Battery (5.0Ah)

**50 MIN.  
CHARGE TIME**



### BL4080F

40V max XGT Battery (8.0Ah)

**76 MIN.  
CHARGE TIME**

## LONGER RUN TIME

### DC40RA

40V max XGT Rapid Charger

- The XGT Rapid Charger with dual-fan design circulates air through the battery to cool the battery and circuit board quickly for faster charging
- Charges a 40V max XGT battery (2.5Ah) in only 28 minutes
- Charges a 40V max XGT battery (4.0Ah) in only 45 minutes
- Charges a 40V max XGT battery (5.0Ah) in only 50 minutes
- Charges a 40V max XGT battery (8.0Ah) in only 76 minutes
- The XGT Rapid Charger's digital display indicates battery charge level (-80%, +80%, 100%)

### DC40RB

40V max XGT Dual Port Rapid Charger

- Charges two batteries simultaneously
- The XGT Rapid Charger with three fan design circulates cooling air through the batteries and circuit board quickly for faster charging
- Charges (2) 40V max XGT batteries (2.5Ah) in only 28 minutes
- Charges (2) 40V max XGT batteries (4.0Ah) in only 45 minutes
- Charges (2) 40V max XGT batteries (5.0Ah) in only 50 minutes
- Charges (2) 40V max XGT batteries (8.0Ah) in only 76 minutes

### ADP10

18V LXT Adapter for XGT Chargers

- Adapts 40V max XGT chargers to charge 18V LXT batteries (batteries not included)
- Charges 18V LXT batteries up to 25% faster!
- Charges an 18V LXT battery (6.0Ah) in only 50 minutes
- Charges an 18V LXT battery (5.0Ah) in only 35 minutes
- Charges an 18V LXT battery (4.0Ah) in only 29 minutes

## 40V max XGT STARTER KITS

Part No.	Description	Contents
T-04335	40V max XGT Dual Rapid Charger Kit (4.0Ah x2)	Two 40V max XGT Batteries (4.0Ah) BL4040, 40V max XGT Dual Port Rapid Charger DC40RB
T-04357	40V max XGT Rapid Charger Kit (5.0Ah)	40V max XGT Battery (5.0Ah) BL4050, 40V max XGT Rapid Charger DC40RA
T-04064	40V max XGT Rapid Charger Kit (4.0Ah)	40V max XGT Battery (4.0Ah) BL4040, 40V max XGT Rapid Charger DC40RA, 18V LXT Battery Adapter ADP10
T-04313	40V max XGT Rapid Charger Kit (4.0Ah)	40V max XGT Battery (4.0Ah) BL4040, 40V max XGT Rapid Charger DC40RA
T-04070	40V max XGT Rapid Charger Kit (2.5Ah)	40V max XGT Battery (2.5Ah) BL4025, 40V max XGT Rapid Charger DC40RA, 18V LXT Battery Adapter ADP10

## COMPATIBILITY

## CHARGES BOTH XGT & LXT BATTERIES



Use adapter ADP10 with  
charger DC40RA to rapid  
charge 18V LXT Batteries

Charges 18V LXT batteries  
up to 25% faster!

# Makita Canada Order Desk & Distribution Centres

## Western Canada

**Phone: 604-272-3104**

**Toll Free Phone: 1 800-663-0909**

**Toll Free Fax: 1 800-667-7078**

Email: [orderdeskmcv@makita.ca](mailto:orderdeskmcv@makita.ca)

## Central, Québec & Eastern Canada

BILINGUAL SERVICE

**Phone: 905-571-2200**

**Toll Free Phone: 1 800-263-3734**

**Toll Free Fax: 1 800-565-0906**

Email (English): [orderdeskmcv@makita.ca](mailto:orderdeskmcv@makita.ca)

Email (Français): [orderdeskmcq@makita.ca](mailto:orderdeskmcq@makita.ca)

## FACTORY SERVICE CENTRES 12 LOCATIONS FROM COAST TO COAST

### RICHMOND / VANCOUVER

11771 Hammersmith Way  
Richmond, BC. V7A 5H6

**Phone: 604-272-3104**

**Toll Free: 1 800-663-0909**

**Fax: 604-272-5416**

### BURNABY / VANCOUVER

2288 Holdom Avenue  
Burnaby, BC. V5B 4Y5

**Phone: 604-291-1511**

**Toll Free: 1 877-295-1511**

**Fax: 604-291-1599**

### CALGARY

#8 – 6325 11th Street SE  
Calgary, AB. T2H 2L6

**Phone: 403-243-3995**

**Toll Free: 1 800-267-0445**

### EDMONTON

11614 - 149 Street NW  
Edmonton, AB. T5M 3R3

**Phone: 780-455-6644**

**Toll Free: 1 888-455-6644**

**Fax: 780-451-4877**

### SASKATOON

206A - 2750 Faithful Avenue  
Saskatoon, SK. S7K 6M6

**Phone: 306-931-0111**

**Toll Free: 1 888-931-0111**

**Fax: 306-931-4574**

### WINNIPEG

1670 St. James Street  
Winnipeg, MB. R3H 0L3

**Phone: 204-694-0402**

**Toll Free: 1 800-550-5073**

**Fax: 204-694-5782**

### LONDON

317 Adelaide Street S. Unit 117  
London, ON. N5Z 3L3

**Phone: 519-686-3115**

**Toll Free: 1 800-571-0899**

**Fax: 519-686-4347**

### MISSISSAUGA / TORONTO

6350 Tomken Road Unit 8  
Mississauga, ON. L5T 1Y3

**Phone: 905-670-7255**

**Toll Free: 1 888-221-9811**

**Fax: 905-670-0120**

### WHITBY / TORONTO

1950 Forbes Street  
Whitby, ON. L1N 7B7  
**Phone: 905-571-2200**  
**Toll Free: 1 800-263-3734**  
**Fax: 1 800-867-1683**

Makita Canada  
**Head Office**  
**& Distribution**  
**Centre** 



### MONTREAL / ST. LEONARD

6389 Boulevard Couture  
St. Leonard, QC. H1P 3J5  
**Phone: 514-323-1223**  
**Toll Free: 1 800 361-7049**  
**Fax: 1 800-561-5953**

### QUÉBEC CITY / LES SAULES

500 Avenue St. Jean Baptiste  
Suite 100, Québec, QC.  
G2E 6H5  
**Phone: 418-871-5720**  
**Toll Free: 1 800-663-5757**  
**Fax: 418-871-6684**

### DARTMOUTH / HALIFAX

204 Brownlow Avenue, Unit 145  
Dartmouth, NS. B3B 1T5  
**Phone: 902-468-7064**  
**Toll Free: 1 888-625-4821**  
**Fax: 902-468-3551**