

Accessories

Hose

Note: All though type B hose can be connected with power tools, Front cuffs and Joint are required for some power tools.



A: for power tools
B: for cleaning

Size	Length (m)	Type	with Front cuffs	Part No.
28mm	1.5	A	22, 38	A-34235
28mm	2.5	A	22, 24, 38	195437-5
28mm	3.5	A	22, 24, 38	195433-3
38mm	2.5	B	38	195434-1

Straight Pipe, Bending Pipe, Anchor Nozzle Set and Corner Nozzle

Straight pipe	Bending pipe	Anchor nozzle set	Corner nozzle
Part No.	Part No.	Part No.	Part No.
192563-1	192562-3	192236-6	410306-2

Nozzle Assembly
(Standard Equipment)



122512-4

Holder Set 10-33



Part No.
195544-4

Round Brush

Part No.
191657-9

Front Cuffs & Joint



Type	Part No.
Front cuffs 22	417765-1
Front cuffs 24	195546-0
Front cuffs 38	417766-9
Joint 22-38	418165-8

Filter Set



HEPA filter set	Prefilter set
Part No.	Part No.
197166-6	195553-3



Damper Set



Part No.
195552-5

Poly Bag Set



Per pkg.	Part No.
10	195432-5

Filter Bag Set

(5pcs/set)



Part No.
195557-5

18Vx2 Cordless Vacuum Cleaner
DVC861L

Double Insulation

Variable Speed

Battery Capacities

Maximum Air Flow

Tank Capacity

AMPS (120V)

Power Cord Length

Dimensions (L x W x H)

Two 18V Li-Ion

74 CFM (2.1 m³/min) on DC power

127 CFM (3.6 m³/min) on AC power

8.0 L

9.2 A

19.7 ft (6.0 m)

14-3/8" x 13-1/8" x 14-1/2"

(366 mm x 334 mm x 368 mm)

18Vx2

18V LITHIUM-ION

makita.ca

18Vx2 Cordless Vacuum Cleaner
DVC861L



18V LITHIUM-ION

High Maneuverability

DC 18Vx2

Powered by two 18V Li-ion batteries in series and AC

Tank capacity: 8L

Continuous run time 30-65min. with two batteries BL1850B

HYBRID

When QUALITY & SERVICE COUNTS

Choose Makita

High Power (Suction power: 320W)

AC

Convenient cord wrap



Versatile use thanks to 2 different power sources
maximum jobsite maneuverability and efficiency



On DC power

- Suction power **70 W**
- Max air flow **74 CFM**
- Static water lift **36"**



+ On AC power

- Suction power **320 W**
- Max air flow **127 CFM**
- Static Water Lift **96"**



Convenient cord wrap

 +  = **36V High Power**


Continuous run time

On a single full battery charge: minute

Battery		BL1850B [5.0Ah]	BL1840B [4.0Ah]	BL1830B [3.0Ah]
Run time	High	30 min.	25 min.	20 min.
	Low	65 min.	50 min.	40 min.

Charging time				
	DC18RD	45 min.	36 min.	22 min.
	DC18RC	45 min. × 2	36 min. × 2	22 min. × 2
	DC18SD	110 min. × 2	90 min. × 2	60 min. × 2

EU Dust Class L

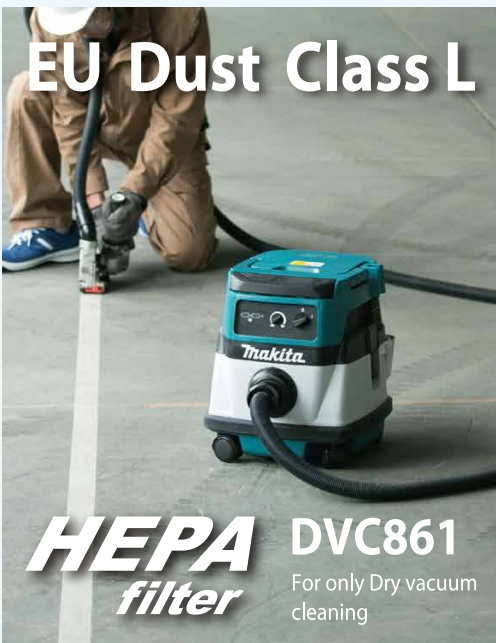

HEPA filter **DVC861**
For only Dry vacuum cleaning



Large on-off switch

- allows for easy on/off switching.
- functions only when main power switch is on to prevent accidental switch-on during transportation, etc.



Dual battery fuel gauge



Variable suction power control by dial



Caster stopper



Removable storage box



On-tool pipe storage

