



Cordless or Electric
Job Site Radio
DMR106

Satisfy Professional's Needs

LXT
LITHIUM-ION



DMR106B
Not Available in Canada

DMR106



**Equipped with
Bluetooth Class 2**

**Compatible with
7.2V, 10.8V, 14.4V, 18V Li-ion Batteries**





equipped with Bluetooth class 2** to wirelessly play music from a mobile device.

**With a range of 10m (33ft); up to 20m (66ft) in good radio conditions

New luxury design


- Designed so that a mobile device can be stably placed on.
- Discriminable from the current models



Dust and shower-proof construction: IP64

For use in outdoor applications or harsh environments.


Foldable antenna



Front metal pipe

AUX-IN jack

DMR106 can be used as a stereo speaker by connecting to external audio source with a commercial connecting cable.

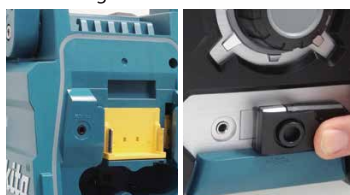

USB output port

- allows for charging a mobile device.
- Type A USB socket for DC5V/ 1.0A USB output

Photo : DMR106



Carry handle

- Swivels 90 degrees
- Features soft grip



Elastomer bumpers

protect against rough handling with falling impact strength of 1.0m.

Large 89mm speaker

provides high-quality sound (Current models : 76mm)

AC adapter jack

Supplied AC adapter can be connected.



Cord length : 1.8m (5.9ft)

Dual Power Sources

Runs on AC adapter or Makita rechargeable Li-ion batteries.

Compatible with
BL1430 / BL1415 /
BL1850 / BL1840 / BL1830 /
BL1820/ BL1815N

BL7010 /
BL1013



Net weight

Battery	kg (lbs)
BL7010	4.4 (9.7)
BL1013	4.4 (9.7)
BL1415	4.6 (10.1)
BL1430	4.8 (10.5)
BL1815N	4.6 (10.2)
BL1830 / BL1840 / BL1850	4.9 (10.8)

Job Site Radio

DMR106 7.2-18V / AC

Battery Capacities	18V Li-Ion / 14.4V Li-Ion / 12V MAX (1.3 Ah) Li-Ion / 10.8V (1.3 Ah) Li-Ion / 7.2V (1.0 Ah) Li-Ion
Dimensions (L x W x H)	10-1/8" x 6-3/8" x 17" (257 mm x 163 mm x 431 mm)
Net Weight	8.8 lbs. (4.0 kg)

Standard Equipment: AC Adapter (SE00000104)
Battery and Charger are sold separately

makita.ca

When QUALITY & SERVICE COUNTS – Choose Makita