Outdoor Power Equipment







Makita Canada Inc. | makita.ca

2024 Catalogue

Makita

RULE THE OUTDOORS

NEW SOLUTIONS FOR THE LANDSCAPER

Your world is changing. Increasing regulations across the nation are limiting the use and availability of gas power equipment. This will affect how you run your business – and Makita is here to help with more battery-powered commercial products to replace your gas equipment. Makita brings leading innovation to the cordless power equipment category, with big numbers to back it up: 100+ years of motor engineering, 90+ years in gas equipment, and 40+ years in cordless. There is no other company in the industry with this expansive engineering capability. Makita offers a complete system of outdoor power equipment with more gas-replacement solutions for mowing, trimming, cutting and clean-ups. With a constant focus on new technology and power management, Makita meets the demands of today and tomorrow. So how will you RULE THE OUTDOORS?



TABLE OF CONTENTS

BATTERIES & CHARGERS **2-11**
- Battery Chargers 9
- Battery Charger Kits & Adapters 9
- Battery Charger Reference Chart 10
- Battery & Charger Time Reference Chart 10
- Battery Quick Reference Chart 11
- Battery Adapters 11
- LXT Battery Accessories 11

ConnectX POWER EQUIPMENT **12-16**
- Power Converter 14
- Portable Backpack Power Supplies 14
- Portable Power Pack 15
- ConnectX Outdoor Power Equipment 15-16
- ConnectX Concrete Vibrators 16

OUTDOOR POWER EQUIPMENT **17-42**
- Lawn Mowers 18-20



Split-Shaft Power Units & Attachments	20-22
Brush Cutters	23
Line Trimmers	23-25
Dethatcher / Scarifier	26
Hedge Trimmers	26-29
Material Movers	29-30
Grass Shears	30-31
Blowers	32-33
Pressure Washer	33
Sprayers	33-34
Mist Blower	34
Earth Augers	34-35
Chainsaws	35-38
Pole Chainsaws	38
Outdoor Power Equipment Accessories	39-42
MAKITA FACTORY SERVICE CENTRES	**43**
WARRANTY STATEMENT	**43**

XGT 40V | 80V max

POWERFUL SYSTEM OF EQUIPMENT & TOOLS

Makita's 40V | 80Vmax XGT Platform OUTPOWERS, OUTSMARTS, and OUTLASTS the competition. The unmatched combination of powerful Brushless motors, intelligent design features, and long-lasting battery life make XGT the cordless game-changer for professionals.

40Vmax XGT

The XGT System is the next generation of technology, engineered to achieve the optimum power required for heavier load applications without sacrificing run time. These high-powered products are the one-battery solution to handle the most demanding jobs and environments.



125+ PRODUCTS ONE SYSTEM




BEYOND LIMITS



OUTPOWER

PURE COPPER WIRE
Makita XGT Products feature purpose-built Brushless Motors with more copper windings for increased power output.

RARE EARTH MAGNETS
Rare earth magnets of the highest quality are engineered within the Brushless Motors to maximize power and performance.



OUTSMART

BUILT-IN MICROCHIPS
Built-in microchips in both tool and Battery allow for real-time digital communication, actively monitoring heat, overload, and over-discharge.

DIGITAL COMMUNICATION
Digital communication between XGT Tools and Batteries through enhanced digital communication technology optimize performance to deliver up to 2X longer sustained power during demanding applications.



OUTLAST

WATER & DUST RESISTANCE
Water and dust-resistant triple layer structure and an enhanced terminal structure are engineered to protect against water and dust for any job site condition.

RAPID OPTIMUM CHARGING SYSTEM
XGT Charger and Dual Cooling Fans digitally communicates before and during the charging process, evaluating Battery condition to deliver a consistent fast charge. Charges LXT batteries with adapter.

80V (40Vx2) max

Two batteries mean more power! Makita-built brushless motors, along with two 40V max XGT Batteries, deliver the power and performance required for heavy-load applications. By using two 40V max XGT Batteries, you get 80V of power within one system. The increased power and performance allow XGT Cordless Equipment and Tools to rival corded tools and gas equipment.



Learn more at makita.ca > XGT




LXT 18V | 36V

ONE SYSTEM. ENDLESS POSSIBILITIES.

The LXT System is the world's largest compatible cordless tool system powered by 18V slide-style batteries. Makita's purpose-built motors, Battery technology, and enhanced communications work together to deliver unmatched power, speed, and run time. Get maximum performance and efficiency with LXT Products for every trade.

18V LXT


Makita was the first to introduce 18V LXT cordless tools. Today, the LXT System is the world's largest compatible 18V slide-style Battery system with over 350 solutions. Makita's purpose-built motors, Battery technology, and enhanced communications work together to deliver unmatched power, speed, and run time. With solutions for every trade, users get maximum performance and efficiency with the LXT System.

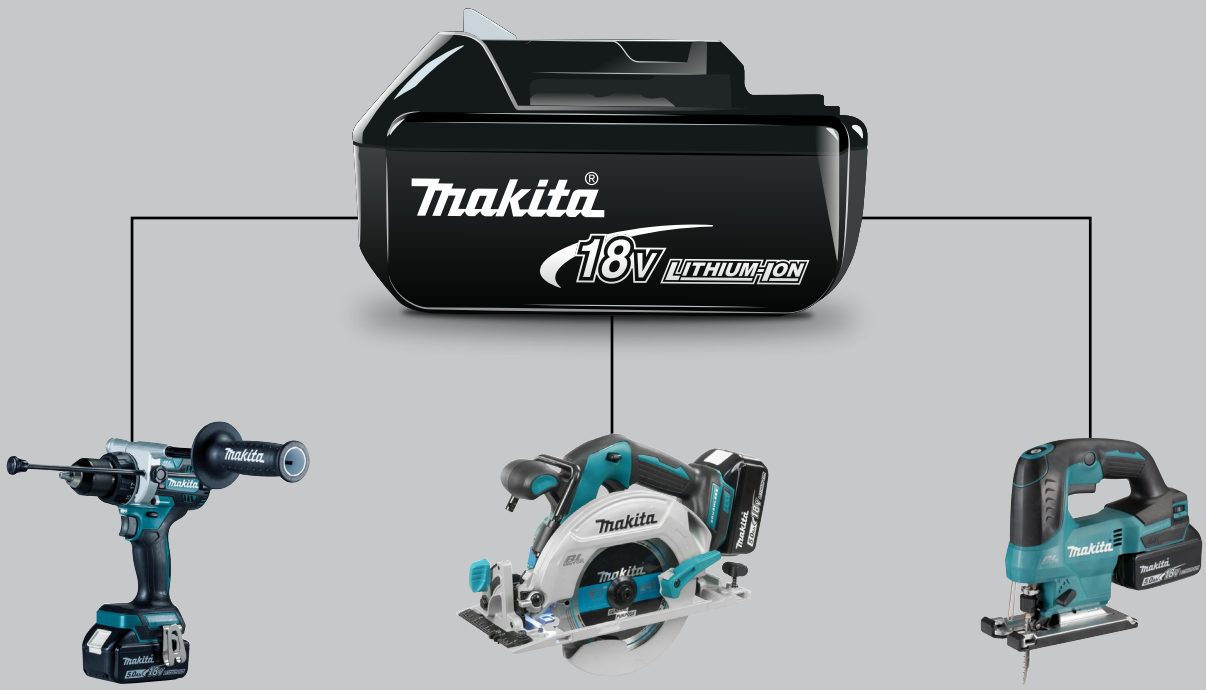


350+ PRODUCTS ONE SYSTEM




MAXIMUM PERFORMANCE




LXT BATTERY
UP TO **50% MORE RUN TIME** [1]



RAPID CHARGING SYSTEM
UP TO **3X FASTER CHARGING** [2]



PURPOSE BUILT BRUSHLESS MOTOR
UP TO **50% LONGER MOTOR LIFE** [3]



STAR PROTECTION COMPUTER CONTROLS
EFFICIENT POWER MANAGEMENT [4]

[1] Vs. Makita 18V Ni-Cd Battery. [2] Vs Makita 18V Ni-Cd Charger. [3] Vs. Makita Cordless Motors with Brushes. [4] Protection against Overloading, Over-Discharging & Overheating.

36V (18Vx2) LXT

36V (18Vx2) LXT Products are powered by two 18V LXT Batteries for maximum power, speed, and run time. By using two 18V LXT Batteries, you get 36V of power and all your cordless tools operate within one system. Makita 36V (18Vx2) LXT Products deliver the power, speed, and run time to handle a wide range of more demanding applications.



Learn more at makita.ca > LXT




Makita
BRUSHLESS
Makita
Makita
40V max
Li-ion 4.0Ah
XGT

40V max XGT Batteries

GOING BEYOND LIMITS









HIGHER OUTPUT POWER

UP TO **2X LONGER RUN TIME**

COMPACT SIZE — **LONGER RUN TIME**

BL4025
40V max XGT Battery (2.5Ah)
28MIN* CHARGE TIME

BL4040
40V max XGT Battery (4.0Ah)
45MIN* CHARGE TIME

BL4050F
40V max XGT Battery (5.0Ah)
50MIN* CHARGE TIME

BL4080F
40V max XGT Battery (8.0Ah)
76MIN* CHARGE TIME

*** with Makita 40V max XGT Rapid Chargers**

40V max XGT Chargers



DC40RA
40V max XGT Rapid Charger

- Charges a 40V max XGT 2.5Ah Battery in 28 minutes, and 4.0Ah Battery in 45 minutes
- Built-in chip communicates during the charging process to control current, voltage, and temperature



NEW DC40RC
40V max XGT Fast Charger

- Charges a 40V max XGT 2.5Ah Battery in 38 minutes, and 4.0Ah Battery in 67 minutes
- The embedded Central Processing Unit (CPU) in the battery communicates with the charger, analyzing the battery's condition for customized charging



DC40RB
40V max XGT Dual Port Rapid Charger

- Charges a 40V max XGT 2.5Ah Battery in 28 minutes, and 4.0Ah Battery in 45 minutes
- Three fan design circulates air through the batteries and circuit board for faster charging



ADP10
18V LXT Adapter for XGT Chargers

- Adapts 40V max XGT chargers to charge 18V LXT batteries (batteries not included)
- Charges a 18V LXT 5.0Ah Battery in 40 minutes, and 6.0Ah Battery in 50 minutes

Backpack Power Supplies



PDC1500A01



PDC1200A02

CONNECTX
XGT 40V | 80V max 18V + 18V = 36V

PDC1500A01 (1,500Wh)
PDC1200A02 (1,200Wh)
ConnectX Portable Backpack Power Supplies

- Ideal for all day work; expected run times with PDC1500A01 / PDC1200A02 may vary by product, application, and workday amount
- Powers ConnectX, 40V max XGT and 36V (18Vx2) LXT systems for ultimate compatibility (40V max adapter 191N62-4 sold separately)



XGT 40V | 80V max



191N62-4
40V max XGT Adapter (PDC1500A01, PDC1200A02, PDC01)







PDC1500A01



PDC1200A02

Backpack Power Supplies

CONNECT X

XGT 40V | 80V max 18V + 18V 36V

PDC1500A01 (1,500Wh)
PDC1200A02 (1,200Wh)
ConnectX Portable Backpack Power Supplies

- Ideal for all day work; expected run times with PDC1500A01 / PDC1200A02 may vary by product, application,and workday amount
- Powers ConnectX, 40V max XGT and 36V (18Vx2) LXT systems for ultimate compatibility (40V max adapter 191N62-4 sold separately)



CONNECT X

XGT 40V | 80V max 18V + 18V 36V 18V

PDC01X2
PDC01 (TOOL ONLY)
18V LXT Portable Power Pack

- Provides up to 4X the run time when used with Makita 18V LXT products
- Provides up to 2X the run time when used with Makita 36V (18Vx2) LXT products

Backpack Power Supply Adapters

18V + 18V 36V



191J51-5
36V (18Vx2) LXT Adapter (PDC1500A01, PDC1200A02, PDC01)

18V



191J50-7
18V LXT Adapter (PDC01 Only)



Small MAKPAC Interlocking Case (197210-9) with Optional Inner Tray (839742-7)

- For convenient storage and transportation of batteries
- 839742-7 Inner tray fits Small MAKPAC Interlocking Case 197210-9
- Holds up to 8 batteries
- Interlocking latches secure lid shut and link multiple cases together

18V LXT Batteries











55MIN* CHARGE TIME | 45MIN* CHARGE TIME | 36MIN* CHARGE TIME | 22MIN* CHARGE TIME | 15MIN* CHARGE TIME

HIGHEST OUTPUT + FAST CHARGE TIME — **HIGH OUTPUT + FASTER CHARGE TIME**

6.0Ah BATTERY	5.0Ah BATTERY	4.0Ah BATTERY	3.0Ah BATTERY	1.5Ah BATTERY
BL1860B 18V LXT Battery (6.0Ah)	**BL1850B** 18V LXT Battery (5.0Ah)	**BL1840B** 18V LXT Battery (4.0Ah)	**BL1830B** 18V LXT Battery (3.0Ah)	**BL1815N** 18V LXT Battery (1.5Ah)

*** with Makita 18V LXT Rapid Chargers**

BATTERY CHARGERS

Model	Description



18V LXT 4-Port Multi-Charger - DC18SF
- Charges two 18V LXT Batteries at once
- Optimum Charging System
- Charges 2 x 18V LXT Batteries (6.0Ah) in 130 minutes
- Charges 4 x 18V LXT Batteries (6.0Ah) in 260 minutes



40V max XGT Dual-Port Rapid Charger - DC40RB
- Accepts 40V max XGT BL4025 / BL4040 / BL4050F Batteries
- Charges two batteries simultaneously and is compatible with ADP10 to adapt XGT charges to charge LXT Batteries
- Charges 2 x 40V max XGT batteries (2.5Ah) in 28 minutes
- Charges 2 x 40V max XGT batteries (4.0Ah) in 45 minutes
- Charges 2 x 40V max XGT batteries (5.0Ah) in 50 minutes



18V LXT Dual-Port Rapid Charger - DC18RD
- Accepts 18V BL1815N / BL1830B / BL1840B / BL1850B / BL1860B LXT Batteries
- Design enables two Batteries to be charged simultaneously
- Forced Air Cooling Fan keeps Battery at optimum charging temperature and prevents over heating



18V LXT / 12V max CXT Li-Ion Dual-Port Rapid Charger - DC18RE
- Charges 12V max CXT (BL1016, BL1021B, BL1041B) and 18V LXT (BL1815N, BL1830B, BL1840B, BL1850B, BL1860B) Batteries
- Design enables two Batteries to be charged simultaneously



New 64V max Li-Ion Standard Charger - DC64WA
- Charges 64V max (4.0Ah) Battery in 120 minutes
- Charges 64V max (10.0Ah) Battery in 300 minutes
- Includes overload protection to provide an optimal charge and ensures the battery cannot be overcharged or overheated during the charging process



40V max XGT Rapid Charger - DC40RA
- Accepts 40V max XGT BL4025 / BL4040 / BL4050F Batteries
- Digital power display indicates condition of Battery and current charge level (-80%, +80%, 100%)
- Use with adapter ADP10 to charge 18V LXT Batteries
- Charges 40V max XGT Battery (2.5Ah) in 28 minutes
- Charges 40V max XGT Battery (4.0Ah) in 45 minutes



New 40V max XGT Fast Charger - DC40RC
- Accepts 40V max XGT BL4025 / BL4040 / BL4050F Batteries
- Digital power display indicates condition of Battery and current charge level (-80%, +80%, 100%)
- Use with adapter ADP10 to charge 18V LXT Batteries
- Charges 40V max XGT Battery (2.5Ah) in 38 minutes
- Charges 40V max XGT Battery (4.0Ah) in 67 minutes



18V LXT Rapid Charger - DC18RC
- Charges 18V LXT Battery (6.0Ah) BL1860B in just 55 minutes
- 3 Active Controls System (Current, Voltage & Temperature) provides an optimal charge and ensures Battery cannot be overcharged or overheated during the charging process
- Central Processing Unit (CPU) in Battery communicates with charger to analyze Battery and charge according to its unique condition



18V LXT Standard Charger - DC18SD
- Charges 14.4V - 18V LXT and Ni-MH Slide Style Batteries
- Charges 18V LXT Battery (6.0Ah) BL1860B in 130 minutes
- Digital Power Display indicates condition of Battery and current charge level (-80%, +80%, 100%)



18V LXT Automotive Charger - DC18SE
- Charges 7.2V - 18V Ni-Cad, Ni-MH and LXT Slide Style Batteries
- Plugs into standard 12V / 24V DC Automotive outlets
- Charges 18V LXT Battery (6.0Ah) in 130 minutes
- Use Adapter ADP04 (Part No. #193949-2) to charge pod / stick Batteries



12V max CXT Li-Ion Rapid Charger - DC10SB
- Charges 12V max CXT Li-Ion Battery (2.0Ah) BL1021B in 30 minutes
- Charges 12V max CXT Li-Ion Battery (4.0Ah) BL1041B in 60 minutes
- Optimum charging system utilizes 3 active controls (current, voltage & temperature) to maximize battery life



12V max CXT Li-Ion Standard Charger - DC10WD
- Charges 12V max CXT Li-Ion Battery (2.0Ah) BL1021B in 70 minutes
- Charges 12V max CXT Li-Ion Battery (4.0Ah) BL1041B in 130 minutes
- LED digital power display indicates condition of battery and current charge level (<80%, >80%)

BATTERY CHARGER KITS & ADAPTERS

Description	Contents	Part No.
New 40V max XGT Dual-Port Rapid Charger Kit (8.0Ah x2)	Includes: BL4080F 40V max XGT Battery (8.0Ah x2) (BL4080F) & Dual-Port Rapid Charger DC40RB	T-04101
New 40V max XGT Dual-Port Rapid Charger Kit (4.0Ah)	Includes: BL4040 40V max XGT Battery (4.0Ah) (BL4040) & Dual-Port Rapid Charger DC40RB	T-04335
40V max XGT Rapid Charger Kit (5.0Ah)	Includes: BL4050F 40V max XGT Battery (5.0Ah) (BL4050F) & Rapid Charger DC40RA	T-04357
40V max XGT Rapid Charger Kit (4.0Ah)	Includes: BL4040 40V max XGT Battery (4.0Ah) (BL4040), Rapid Charger DC40RA & LXT Battery Adapter ADP10	T-04064
New 40V max XGT Fast Charger Kit (4.0Ah)	Includes: BL4040 40V max XGT Battery (4.0Ah) (BL4040) & Fast Charger DC40RC	T-05935
40V max XGT Rapid Charger Kit (2.5Ah)	Includes: BL4025 40V max XGT Battery (2.5Ah) (BL4025), Rapid Charger DC40RA & LXT Battery Adapter ADP10	T-04070
New 40V XGT Fast Charger Kit (2.5Ah)	Includes: BL4025 40V max XGT Battery (2.5Ah) (BL4025) & Fast Charger DC40RC	T-05929
18V LXT Dual-Port Rapid Charger Kit (5.0Ah x2)	Includes: BL1850B 18V LXT Battery (5.0Ah x2) (196675-2) & Dual-Port Rapid Charger DC18RD	Y-00359
18V LXT Rapid Charger Kit (5.0Ah)	Includes: BL1850B 18V LXT Battery (5.0Ah) (196675-2) & Rapid Charger DC18RC	Y-00309
18V LXT Dual-Port Rapid Charger Kit (4.0Ah x2)	Includes: BL1840B 18V LXT Battery (4.0Ah x2) (196401-9) & Dual-Port Rapid Charger DC18RD	Y-00315
18V LXT Rapid Charger Kit (4.0Ah)	Includes: BL1840B 18V LXT Battery (4.0Ah) (196401-9) & Rapid Charger DC18RC	Y-00284
12V max CXT Li-Ion Charger Kit (4.0Ah x2)	Includes: BL1041B 12V max CXT Li-Ion Battery (4.0Ah x2) (197416-9) & Battery Charger DC10WB with Interlocking Plastic Case	191L73-7
Battery Charger Adapter ADP03	Refreshing Adapter for DC14SA, DC18RC and DC24SA for Makstar Batteries	193681-8
Battery Charger Adapter ADP04	Adapts DC18RC and DC18SE to charge pod style Batteries	193949-2
Battery Adapter BCV01	Adapts 36V (18Vx2) LXT tools to accept two 18V (3.0Ah) LXT Batteries. Belt / Shoulder Style.	195512-7
Battery Adapter BCV03	Adapts 36V (18Vx2) LXT tools to accept 18V (3.0Ah) or (4.0Ah) Batteries. Direct Connect Style.	196810-2
Battery Adapter BAP182	Belt and/or shoulder adapter for 36V (18Vx2) LXT tools	197578-3



T-04335

BATTERY CHARGER REFERENCE CHART

Charger Type	64V	XGT	LXT	Ni-MH	Ni-Cad	Voltage (V)	Description	Model No.	Part No.
Makstar Charger	-	-	Yes	Yes	Yes	7.2V - 24V	Adaptor ADP04 #193949-2 required to charge all Pod / Stick style Batteries	DC24SC	DC24SC
Rapid Charger	-	Yes	Yes	-	-	40V max XGT	Adapter ADP10 required to charge 18V LXT Slide Style Batteries	DC40RA	DC40RA
	-	-	Yes	-	-	36V	-	DC36RA	DC36RA
	-	-	Yes	Yes	Yes	7.2V - 18V	Adaptor ADP04 #193949-2 required to charge all Pod / Stick Style Batteries	DC18RC	DC18RC
New Fast Charger	-	Yes	Yes	-	-	40V max XGT	Adapter ADP10 required to charge 18V LXT Slide Style Batteries	DC40RC	DC40RC
Dual-Port Rapid Charger	-	Yes	Yes	-	-	40V max XGT	Adapter ADP10 required to charge 18V LXT Slide Style Batteries	DC40RB	DC40RB
	-	-	Yes	Yes	Yes	7.2V - 18V	Adapter ADP04 #193949-2 required to charge all Pod / Stick style Batteries	DC18RD	DC18RD
	-	-	Yes	-	-	12V - 18V	Only for Slide-On Type Batteries. Adapters cannot be used with this charger.	DC18RE	DC18RE
4-Port Multi Charger	-	-	Yes	-	-	14.4V - 18V	-	DC18SF	DC18SF
Standard Charger	-	-	Yes	Yes	-	7.2V - 18V	Only for Slide-On Type Batteries. Adaptoes cannot be used with this charger.	DC18SD	DC18SD
	Yes	-	-	-	-	64V	Only for 64V Batteries	DC64WA	DC64WA
Automotive Charger (plugs into 12V Automotive outlets)	-	-	Yes	Yes	Yes	7.2V - 18V	Adapter ADP04 #193949-2 required to charge all Pod / Stick style Batteries	DC18SE	DC18SE
Standard Pod / Stick Charger	-	-	-	Yes	Yes	7.2V - 18V	-	DC1804	DC1804
Li-Ion Pod / Stick Charger	-	-	Yes	-	-	7.2V - 12V	-	DC10WB	DC10WB
Li-Ion Slide Charger	-	-	Yes	-	-	12V max CXT	-	DC10SB	DC10SB
	-	-	Yes	-	-			DC10WD	DC10WD
Built-In Charger	-	-	-	-	Yes	7.2V	-	DC7020	113051-5

BATTERY AND CHARGER TIME REFERENCE CHART (MINUTES)

Voltage	Cell Type	Ah	Style	DC64WA	DC40RA	DC40RB	DC40RC	DC36RA	DC24SC	DC18RC	DC18RD	DC18RE	DC18WC	DC18SF	DC18SD	DC1804	DC18SE	DC10SB	DC10WD	DC10WB	DC07SA	Model No.	Part No.
64V	Li-Ion	10.0	Slide-On	300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BL64100*	
		4.0	Slide-On	120	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BL6440*	
40V max	Li-Ion	8.0	Slide-On	-	**76**	**76**	**N/A**	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BL4080F*	
		5.0	Slide-On	-	**50**	**50**	**85**	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BL4050F*	
		4.0	Slide-On	-	**45**	**45**	**67**	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BL4040*	
		2.5	Slide-On	-	**28**	**28**	**38**	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BL4025*	
36V	LXT	2.6	Pod	-	-	-	-	22	-	-	-	-	-	-	-	-	-	-	-	-	-	BL3626	194874-0
24V	Ni-MH	3.3	Slide-On	-	-	-	-	-	50	-	-	-	-	-	-	-	-	-	-	-	-	BH2433	193740-8
		2.0	Slide-On	-	-	-	-	-	30	-	-	-	-	-	-	-	-	-	-	-	-	BH2420	193737-7
18V	LXT	6.0	Slide-On	-	**40**	**40**	**85**	-	-	**55**	**55**	**55**	160	130	130	-	130	-	-	-	-	BL1860B*	197424-0
		5.0	Slide-On	-	**35**	**35**	**70**	-	-	**45**	**45**	**45**	135	110	110	-	110	-	-	-	-	BL1850B*	196675-2
		4.0	Slide-On	-	**29**	**29**	**58**	-	45	**36**	**36**	**36**	110	90	90	-	90	-	-	-	-	BL1840B*	196401-9
		3.0	Slide-On	-	**22**	**22**	**42**	-	35	**22**	**22**	**22**	80	60	60	-	60	-	-	-	-	BL1830B*	194205-3
		1.5	Slide-On	-	**15**	**15**	**22**	-	20	**15**	**15**	**15**	40	30	30	-	30	-	-	-	-	BL1815N	196235-0
	Ni-MH	3.0	Pod	-	-	-	-	-	40	70	-	70	-	-	-	70	100	-	-	-	-	1835	193140-2
		2.6	Pod	-	-	-	-	-	35	60	-	60	-	-	-	60	85	-	-	-	-	1834	193159-1
14.4V	Li-Ion	3.0	Slide-On	-	-	-	-	-	30	22	22	22	-	60	60	-	60	-	-	-	-	BL1430B*	194066-1
		Compact	Slide-On	-	-	-	-	-	20	15	15	15	-	30	30	-	30	-	-	-	-	BL1415NA*	196987-3
	Ni-MH	3.0	Pod	-	-	-	-	-	40	70	-	70	-	-	-	70	100	-	-	-	-	1435	193139-7
		2.6	Pod	-	-	-	-	-	35	60	-	60	-	-	-	60	85	-	-	-	-	1434	193158-3
12V	Li-Ion	4.0	Slide-On	-	-	-	-	-	-	-	-	60	-	-	-	-	-	60	130	-	-	BL1041B*	197416-9
		2.0	Slide-On	-	-	-	-	-	-	-	-	30	-	-	-	-	-	30	70	-	-	BL1021B*	197414-3
		1.5	Slide-On	-	-	-	-	-	-	-	-	22	-	-	-	-	-	22	50	-	-	BL1016*	197412-3**
		1.3	Pod	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	50	-	BL1014	195332-9
	Ni-MH	3.3	Slide-On	-	-	-	-	-	30	22	22	22	-	-	70	-	70	-	-	-	-	BH1233C	193930-3
		2.6	Pod	-	-	-	-	-	35	60		60	-	-	-	60	*85	-	-	-	-	1234	193157-5
		2.0	Slide-On	-	-	-	-	-	20	15	15	15	-	-	40	-	40	-	-	-	-	BH1220C	193928-0
10.8V	Li-Ion	1.3	Pod	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	50	-	BL1013	195332-9
9.6V	Ni-MH	3.3	Slide-On	-	-	-	-	-	30	30	30	30	-	-	70	-	70	-	-	-	-	BH9033A	193536-7
		2.6	Pod	-	-	-	-	-	35	60	-	60	-	-	-	60	85	-	-	-	-	9134	193156-7
		2.0	Slide-On	-	-	-	-	-	20	20	20	20	-	-	40	-	40	-	-	-	-	BH9020A	193531-7
7.2V	Li-Ion	1.5	Stick	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	35	35	BL0715	198001-1

*** Charge Level Indicator** **** Available for Warranty replacement only**

BATTERY QUICK REFERENCE CHART

Voltage	Cell Type	Ah	Style	Model No.	Part No.	Twin Pack Part No.	Bulk Pack Part No.
64V	Li-Ion	10.0	Slide-On	BL64100*		-	-
		4.0	Slide-On	BL6440*		-	-
40V max	Li-Ion	8.0	Slide-On	BL4080F*		BL4080F-2	-
		5.0	Slide-On	BL4050F*		-	-
		4.0	Slide-On	BL4040*		BL4040-2	-
		2.5	Slide-On	BL4025*		BL4025-2	-
36V	LXT	2.6	Slide-On	BL3626	194874-0	-	-
24V	Ni-MH	3.3	Slide-On	BH2433	193740-8	-	-
		2.0	Slide-On	BH2420	193737-7	-	-
18V	LXT	6.0	Slide-On	BL1860B*	197424-0	197429-0	-
		5.0	Slide-On	BL1850B*	196675-2	196681-7	197198-3 (10 pack)
		4.0	Slide-On	BL1840B*	196401-9	196406-9	196891-6 (10 pack)
		3.0	Slide-On	BL1830B*	194205-3	194230-4	-
		1.5	Slide-On	BL1815N	196235-0	196851-8	196890-8 (10 pack)
	Ni-MH	3.0	Pod	1835	193140-2	-	-
		2.6	Pod	1834	193159-1	-	-
14.4V	Li-Ion	3.0	Slide-On	BL1430B*	194066-1	194397-8	-
		Compact	Slide-On	BL1415NA*	196987-3	-	-
	Ni-MH	3.0	Pod	1435	193139-7	-	-
		2.6	Pod	1434	193158-3	-	-
12V	Li-Ion	4.0	Slide-On	BL1041B*	197416-9	-	-
		2.0	Slide-On	BL1021B*	197414-3	-	-
		1.3	Pod	BL1014	195332-9	-	-
	Ni-MH	3.3	Slide-On	BH1233C	193930-3	-	-
		2.6	Pod	1234	193157-5	-	-
		2.0	Slide-On	BH1220C	193928-0	-	-
10.8V	Li-Ion	1.3	Pod	BL1013	195332-9	-	-
9.6V	Ni-MH	3.3	Slide-On	BH9033A	193536-7	-	-
		2.6	Pod	9134	193156-7	-	-
		2.0	Slide-On	BH9020A	193531-7	-	-
7.2V	Li-Ion	1.5	Stick	BL7015	198001-1	-	-

*** Charge Level Indicator**

18V LXT BATTERY ADAPTER FOR XGT CHARGERS - ADP10



- Adapts 18V LXT Batteries to 40V max XGT Battery Charger DC40RA & DC40RB (batteries not included)
- Charges an 18V LXT 5.0Ah Battery in only 40 minutes
- XGT Rapid Charger's digital display indicates Battery charge level (charger not included)
- The digital communication within XGT protects against overload, over-discharge and overheating

DC40RA Charge Times:
- 18V LXT 6.0Ah BL1860B Battery in just 50 minutes
- 18V LXT 5.0Ah BL1850B Battery in just 40 minutes
- 18V LXT 4.0Ah BL1840B Battery in just 29 minutes
- 18V LXT 3.0Ah BL1830B Battery in just 22 minutes

36V (18Vx2) LXT BATTERY ADAPTER - 197578-3



- Belt and / or shoulder adapter for Makita 36V (18Vx2) LXT tools
- Belt slots enable operator to securely thread belt through adapter
- Optional shoulder strap available (part no. 166070-0)
- Dual LED charge level indicators display approximate remaining Battery power
- Heavy duty 5' power cord enables maximum reach
- For models: DHR263, DHR264, DHS711, DUB361, DUB362, DUH651, DUC302, DUR364

LXT BATTERY ACCESSORIES

Description	Features & Benefits / For Model(s) No.	Part No.
LXT Battery Protector	Shock Absorbing Frame for LXT Batteries BL1430, BL1830B, BL1840B, BL1850B	194649-7
LXT Battery Cover	Dust Protection Cover for LXT Batteries BL1021B, BL1041B	456128-6
	Dust Protection Cover for LXT Batteries BL1415, BL1430, BL1815N, BL1830B, BL1840B, BL1850B, BL1860B	450128-8
	Dust and Impact Protection TPU Softshell Case for LXT Batteries BL1830B, BL1840B, BL1850B, BL1860B. Protects work-piece from scuff marks from the Battery.	422807-8
	Dust Protection Cover for LXT Battery BL3626	451153-2

12V max CXT ADAPTER / AA BATTERY PACK - ADP09



- Adapts 8 AA Batteries to be used as a power source for compatible CXT Cordless Laser Levels (AA Batteries not included)
- Use 8 AA Batteries (zinc-carbon / alkaline / Ni-MH)
- Compatible ONLY with CXT Cordless Laser Levels: SK106GDZ, SK106DZ, SK105GDZ, SK105DZ

LXT POWER SOURCE ADAPTERS

Model	Description
	**40V max XGT USB Power Adapter - ADP001G** • Dual USB ports enable convenient charging of two mobile devices on the jobsite • Type A USB socket offers DC 5 V / 2.4 A maximum output • On / Off switch activates and deactivates USB output • Powered by all Makita 40V max XGT Li-Ion batteries • Compact size achieved by removing belt clip for increased concealability and portability
	**18V LXT Power Source Adapter - ADP05** • Features 2 x USB ports to enable convenient charging of mobile devices on the jobsite • Belt clip allows power source adapter to be easily carried by user • Accepts Makita 18V LXT Compact, 3.0, 4.0 and 5.0Ah batteries • Max. 2.1A output per USB port (4.2A total)
	**12V max CXT Power Source Adapter - ADP06** • USB port enables convenient charging of mobile devices on the jobsite • Type A USB socket offers DC 5 V / 2.1 A maximum output • On / Off switch activates and deactivates USB output • Powered by All Makita Slide 12V Li-Ion batteries • Integrated belt clip and carrying strap
	**12V max CXT Power Source Adapter - ADP08** • USB port enables convenient charging of mobile devices on the jobsite • Type A USB socket offers DC 5 V / 2.1 A maximum output • On / Off switch activates and deactivates USB output • Powered by All Makita Slide 12V Li-Ion batteries • Compact version of ADP06 achieved by removing belt clip for increased concealability and portability


makita
1200Wh
36v
40v max

CONNECTX™

COMMERCIAL OUTPUT



HIGHER CAPACITY
Delivers 1,200 Watt Hours of Output

LONGER RUN TIME
Ideal for all day work

ULTIMATE COMPATIBILITY
Powers ConnectX, 40V max XGT and 36V (18Vx2) LXT systems

DURABLE DESIGN
IPX4-rated weather-resistant construction

HIGHER CAPACITY. NO GAS.

PROVIDES THE RUN TIME NEEDED FOR ALL DAY WORK

ConnectX is a run-time and power solution for use with ConnectX products, as well as XGT and LXT tools and equipment when used with an adaptor. It accelerates the transition to Battery power with a Backpack Power Supply which packs a high-capacity Battery for all-day work and performance without the hassles of gas or cords.



PDC1500A01
ConnectX 1,500 Wh PORTABLE BACKPACK POWER SUPPLY

PDC1200A01
ConnectX 1,200 Wh PORTABLE BACKPACK POWER SUPPLY

CONNECTX™
DIRECT CONNECT



XGT
40V max ADAPTER



LXT
36V (18Vx2) ADAPTER



POWER CONVERTER

ConnectX/XGT/LXT/AC





Used With CONNECTX Portable Backpack Power Supplies

NEW



Ideal as an emergency power source or for outdoor leisure activities

BAC01

Power Converter

Can be used with PDC01, PDC1200 or PDC1500 Portable Backpack Power Supplies

- Turns DC power into AC power suitable for powering electric tools and appliances
- Equipped with multiple outlets including two AC outlets, two Type-A USB ports, two Type-C USB ports and one 12V DC port
- Onboard display indicates with LED lights the 7 wattage outputs (200, 400, 600, 800, 1,000, 1,200 and 1,400 watts)
- The 1,400W LED light will flash when AC power outlets alone reaches 1,450 watts or total power output reaches 1,500 watts
- A built-in audible buzzer warns the user when the unit stops supplying power output due to overload, high temperature, low battery capacity or other malfunctions
- AC power output 1,400W (continuous output) and 2,800W (maximum output) - 50/60Hz (switchable frequency)
- AC power with pure sine wave enables the use of delicate electronic devices
- AC power is compatible with battery chargers, small home appliances and electronic devices such as computers
- Compatible with the Makita MAKPAC system

BAC01 Includes: Tool Only. Portable Backpack Power Supplies, Batteries and Battery Chargers Sold Separately.

Battery Voltage	**36V**
Inverter Capacity W(VA):	Cont. Rating Output: 1,400
	Maximum Output: 2,800
AC Output Voltage	120V
AC Output	w/Pure Sine Wave,
	Frequency: 50/60 Hz Switchable, 2 AC Outlets
USB Outlets:	2 Type-A (5V/2.4A) USB Output Ports
	2 Type-C (USB-PD 30W) USB Output Ports
DC Output	One 12V/10A Outlet Socket
Cont. Run Time (Approx.) w/Fully Charged Power Supply:	
	56 Minutes* w/PDC1200 / 20 Minutes** w/PDC01
Warning Buzzer	
	Yes (Battery Capacity/High Temperature/Overload)
Overload Protection	Yes
Protection Against Electric Shock	Double Insulation
Weight:	16.1 lbs (7.3 kg) BAC01 Only
	28.2 lbs (12.8 kg) w/PDC01 w/Four BL1860B Batteries
	35.7 lbs (16.2 kg) w/PDC1200

***when discharging at a rate of 1,000W (VA)**

****when loaded w/four BL1860B Batteries and discharging at a rate of 750W (VA)**

PORTABLE BACKPACK POWER SUPPLIES

ConnectX/XGT/LXT





CONNECTX XGT 40V | 80V max 18V

NEW

PDC1500A01

ConnectX 1,500 Wh Portable Backpack Power Supply

High capacity 43.5 Ah / 1,500 Wh Battery Backpack for maximum power and continuous run time

Use with Makita 40V max XGT, 36V (18Vx2) LXT or direct connect industrial, commercial & outdoor power equipment products

- Quick release harness straps for simple attachement to ConnectX Lawn Mower LM001CZ and Backpack Blower UB002CZ
- Use with 36V (18Vx2) LXT Battery Adapter (191J51-5) or 40V max XGT Battery Adapter (191N62-4)

PDC1500A01 Includes: Charger (DC4001), Shoulder Harness (1913P9-4)

Battery Capacities	**43.55 Ah**
Battery Energy Capacities	1,567.8 Wh
Power Cord Length:	Battery 3.9 ft (1.2 m)
	Adapter 2.0 ft (0.6 m)
Dimensions (L x W x H)	14-1/2" x 12-1/4" x 5-1/8"
	(36.9 cm x 31.2 cm x 13.1 cm)
Net Weight:	Battery 24.0 lbs (10.9 kg)
	Harness 4.4 lbs (2.0 kg)



CONNECTX XGT 40V | 80V max 18V

PDC1200A02

ConnectX 1,200 Wh Portable Backpack Power Supply

High capacity 33.5 Ah / 1,200 Wh Battery Backpack for maximum power and continuous run time

Use with Makita 40V max XGT, 36V (18Vx2) LXT or direct connect industrial, commercial & outdoor power equipment products

- Provides up to 6X the run time when used with 36V (18Vx2) LXT products (with optional 18Vx2 LXT Battery Adapter 191J51-5)
- Provides up to 13X the run time when used with 40V max XGT products (with optional 40V max XGT Battery Adapter, 191N62-4)

PDC1200A02 Includes: Charger (DC4001), Shoulder Harness (127668-8)

Battery Capacities	**33.5 Ah**
Battery Energy Capacities	1,206 Wh
Power Cord Length:	Battery 3.6 ft (1.1 m)
	Adapter 2.0 ft (0.6 m)
Dimensions (L x W x H)	14-1/2" x 10-1/4" x 5-1/2"
	(36.9 cm x 26.1 cm x 13.9 cm)
Net Weight:	Battery 19.4 lbs (8.8 kg)
	Harness 3.5 lbs (1.6 kg)

PORTABLE POWER PACK

ConnectX/XGT/LXT





CONNECTX XGT 40V | 80V max 18V

PDC01 / PDC01X2

18V LXT Portable Power Pack

Provides up to 2X run time with 36V (18Vx2) LXT or 4X run time with 18V LXT products

Accepts up to 4 Makita 18V LXT Batteries for use with Makita 36V (18Vx2) LXT / 18V LXT power tools

- Provides up to 2X the run time when used with 36V (18Vx2) LXT products (with included adapter)
- Provides up to 4X the run time when used with 18V LXT products (with optional 18V Battery Adapter, 191J50-7)
- Padded harness with quick release shoulder and waist straps for operator comfort
- Battery box can be detached from the harness for use as a stationary power supply

PDC01 Includes: Adapter for 36V (18Vx2) Battery (191J51-5), Shoulder Harness (127347-8)

PDC01X2 Also Includes: BL1850B 18V LXT Battery (5.0Ah x2) (196675-2), Dual Port Rapid Charger (DC18RD)

Battery Capacities	Up to Four 18V LXT Batteries
Power Cord Length	5.6 ft (1.7 m)
Dimensions (L x W x H)	15-3/4" x 10-5/8" x 5-7/8" (40 cm x 27 cm x 14.9 cm)
Net Weight	12.4 lb (5.6 kg)

ConnectX OUTDOOR POWER EQUIPMENT

ConnectX





CONNECTX BL MOTOR

LM001CZ

ConnectX 21" Self-Propelled Commercial Lawn Mower w/XPT

Suitable for lawns up to 6,900 square meters (approx. 74,270 square feet) with PDC1200A02

- Heavy duty durable steel deck for harsh work environments

LM001CZ Includes: Tool Only. Batteries and Charger Sold Separately. Rod 6 (327589-6), Side Discharge Mouth (459887-1), Socket Wrench 17 (782210-8), Socket Wrench 13 (782212-4), Mulching Plug Assembly (127516-1)

Battery Capacities:

	ConnectX Portable Backpack Power Supply (PDC1200A02) 18V LXT Portable Power Pack (PDC01)
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed:	
Normal Mode	2,800 RPM
Soft No-Load Mode	2,300 / 2,800 RPM
Noise Reduction Mode	2,300 RPM
Dimensions (L x W x H)	67-1/2" x 23-1/4" x 43" (172 cm x 59 cm x 110 cm)
Net Weight	90.6 lbs (41.2 kg)



CONNECTX BL MOTOR

UR201CZ

ConnectX 17" Line Trimmer w/XPT, AFT & ADT

Powered by connecting to Makita's 18V LXT Portable Power Pack PDC01 or Makita's ConnectX 1,200Wh Portable Backpack Power Supply PDC1200A02 (both sold separately)

- 1.0 kW motor with power equivelant to a 30cc gas motor
- 3 speed options (Low: 4,600 RPM, Medium: 5,500 RPM, High: 7,000 RPM) for power management
- 17" cutting swath for increased productivity

UR201CZ Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (191R00-0), Protective Guard (191B54-1), Harness (197243-4), Box Wrench 17 (782238-6), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

Battery Capacities:

	ConnectX Portable Backpack Power Supply (PDC1200A02) 18V LXT Portable Power Pack (PDC01)
No Load Speed	4,600 / 5,500 / 7,000 RPM
Cutting Width	17" (43 cm)
Overall Length	70-1/2" (179.5 cm)
Net Weight	10.4 lbs (4.7 kg)



CONNECTX BL MOTOR

UB002CZ

ConnectX 671 CFM Backpack Blower w/XPT

Power and performance equivalent to 50cc engine Backpack Blower

- Use with Makita PDC1200A02 Portable Backpack Power Supply ONLY
- Cruise control lever allows operator to lock the variable speed trigger at the required power level
- Battery fuel gauge with 3 LED indicators allows operator to easily monitor current power level

UB002CZ Includes: Tool Only. Batteries and Charger Sold Separately. End Nozzle 82 (413G70-6), Flexible Pipe (413G69-1), Swivel Pipe (162B56-4), Shoulder Harness R (161510-3), Shoulder Harness L (161509-8), Band A (162B59-8), Band B (162B60-3)

Battery Capacities	ConnectX Portable Backpack Power Supply (PDC1200A02)
Maximum Air Volume	0 - 671 CFM (0 - 19 m³/min)
Maximum Air Velocity	0 - 160 MPH (0 - 71.7 m/sec)
No Load Speed	0 - 22,000 RPM
Overall Length	54" (136.8 cm)
Net Weight	15.8 lbs (7.1 kg)



CONNECTX BL MOTOR

UB001CZ

ConnectX 622 CFM Blower w/XPT

Powered by connecting to Makita's 18V LXT Portable Power Pack PDC01 or Makita's ConnectX 1,200Wh Portable Backpack Power Supply PDC1200A02 (both sold separately)

- Torque boost mode delivers extra power when required from 530 CFM (112 MPH) to 622 CFM (157 MPH)
- Cruise control lever allows you to lock the variable speed trigger to a desired power level
- Integrated 3-stage telescopic nozzle up to 4"
- IPX4 rated for maximum weather and water resistance
- Downward facing nozzle tip for optimum operator positioning

UB001CZ Includes: Tool Only. Batteries and Charger Sold Separately. Shoulder Harness (191J48-4), End Nozzle 80 (412758-3)

Battery Capacities:

ConnectX Portable Backpack Power Supply (PDC1200A02)	18V LXT Portable Power Pack (PDC01)
Maximum Air Volume	622 CFM (17.6 m³/min)
Maximum Air Velocity	157 MPH (70 m/sec)
No Load Speed	24,000 RPM
Overall Length	41-3/4" (106 cm)
Net Weight	5.7 lbs (2.6 kg)

ConnectX CONCRETE VIBRATORS

ConnectX





CONNECTX NEW

VR001CZ

ConnectX 1-11/16" x 4.9 ft. Concrete Vibrator

Discover the groundbreaking VR001C, VR002C, VR003C, and VR004C models, all powered by an unstoppable 36V high-power drive system. Seamlessly pair them with the renowned Makita portable power pack models PDC01 and PDC1200A02

- ConnectX is engineered for extended, non-stop operation while maintaining an impressively lightweight tool body
- Our high-efficiency motor concrete vibrators integrate motors into the head, ensuring minimal maintenance and uninterrupted vibration efficiency

VR001CZ Includes: Tool Only. Batteries and Charger Sold Separately.

Battery Capacities:

ConnectX Portable Backpack Power Supply (PDC1200A02)	18V LXT Portable Power Pack (PDC01)
Vibrations Per Minute	12,000 VPM
Vibrator Diameter	ø1-11/16" (ø43 mm)
Shaft Length	4.9 ft (1.5 m)
Net Weight	8.0 lbs (3.6 kg)



CONNECTX NEW

VR002CZ

ConnectX 1-11/16" x 9.8 ft. Concrete Vibrator

Discover the groundbreaking VR001C, VR002C, VR003C, and VR004C models, all powered by an unstoppable 36V high-power drive system. Seamlessly pair them with the renowned Makita portable power pack models PDC01 and PDC1200A02

- ConnectX is engineered for extended, non-stop operation while maintaining an impressively lightweight tool body
- Our high-efficiency motor concrete vibrators integrate motors into the head, ensuring minimal maintenance and uninterrupted vibration efficiency

VR002CZ Includes: Tool Only. Batteries and Charger Sold Separately.

Battery Capacities:

ConnectX Portable Backpack Power Supply (PDC1200A02)	18V LXT Portable Power Pack (PDC01))
Vibrations Per Minute	12,000 VPM
Vibrator Diameter	ø1-11/16" (ø43 mm)
Shaft Length	9.8 ft (3.0 m)
Net Weight	10.4 lbs (4.7 kg)



CONNECTX NEW

VR003CZ

ConnectX 2" x 4.9 ft. Concrete Vibrator

Discover the groundbreaking VR001C, VR002C, VR003C, and VR004C models, all powered by an unstoppable 36V high-power drive system. Seamlessly pair them with the renowned Makita portable power pack models PDC01 and PDC1200A02

- ConnectX is engineered for extended, non-stop operation while maintaining an impressively lightweight tool body
- Our high-efficiency motor concrete vibrators integrate motors into the head, ensuring minimal maintenance and uninterrupted vibration efficiency

VR003CZ Includes: Tool Only. Batteries and Charger Sold Separately.

Battery Capacities:

ConnectX Portable Backpack Power Supply (PDC1200A02)	18V LXT Portable Power Pack (PDC01)
Vibrations Per Minute	12,000 VPM
Vibrator Diameter	ø2" (ø52 mm)
Shaft Length	4.9 ft (1.5 m)
Net Weight	9.8 lbs (4.4 kg)



CONNECTX NEW

VR004CZ

ConnectX 2" x 9.8 ft. Concrete Vibrator

Discover the groundbreaking VR001C, VR002C, VR003C, and VR004C models, all powered by an unstoppable 36V high-power drive system. Seamlessly pair them with the renowned Makita portable power pack models PDC01 and PDC1200A02

- ConnectX is engineered for extended, non-stop operation while maintaining an impressively lightweight tool body
- Our high-efficiency motor concrete vibrators integrate motors into the head, ensuring minimal maintenance and uninterrupted vibration efficiency

VR004CZ Includes: Tool Only. Batteries and Charger Sold Separately.

Battery Capacities:

ConnectX Portable Backpack Power Supply (PDC1200A02)	18V LXT Portable Power Pack (PDC01)
Vibrations Per Minute	12,000 VPM
Vibrator Diameter	ø2" (ø52 mm)
Shaft Length	9.8 ft (3.0 m)
Net Weight	12.2 lbs (5.5 kg)


24405
DANGER
makita
makita

LAWN MOWERS

XGT/LXT





64V max Li-ion BL MOTOR NEW

LM004JB101

64V max Li-Ion 21" Self-Propelled Lawn Mower w/XPT

Suitable for lawns up to 3,800 square meters (40,900 square feet) on Push Drive & up to 2,800 square meters (30,140 square feet) on Self-Propelled

- Commercial-grade 21" steel deck
- 3-in-1 capability (mulching, rear bagging, rear discharge)

LM004JB101 Includes: BL64100 64V max Li-Ion Battery(10.0Ah) (BL64100), Charger (DC64WA), Battery Cover (413A28-9), Blade Set (191V96-5), Rod 6 (327589-6), Discharge Chute (413L57-8), Mulching Plug (413L55-2), Socket Wrench 17 (782210-8)

Battery Capacities	64V max Li-Ion
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed:	
Normal Mode	2,800 RPM
Soft No-Load Mode	2,300 - 2,800 RPM
Noise Reduction Mode	2,300 RPM
Dimensions (L x W x H)	71-1/4" x 23-1/2" x 42-1/2" (181 cm x 59.5 cm x 108 cm)
Net Weight	76.3 lbs (34.6 kg)



64V max Li-ion BL MOTOR

LM002JM101

64V max Li-Ion 21" Lawn Mower w/XPT

Suitable for lawns up to 1,600 square meters (approx. 17,220 square feet)

- Large lightweight plastic deck with 21" cutting width ensures the job is completed with less passes
- 3-in-1 capability enables mulching, rear bagging or rear discharge

LM002JM101 Includes: BL6440 64V max Li-Ion Battery (4.0Ah) (BL6440), Charger (DC64WA) Battery Cover (413A28-9), Blade Set (191V96-5), Rod 6 (327589-6), Mulching Plug (413945-7), Socket Wrench 17 (782210-8)

Battery Capacities	64V max Li-Ion
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed:	
Normal Mode	2,800 RPM
Soft No-Load Mode	2,300 / 2,800 RPM
Noise Reduction Mode	2,300 RPM
Dimensions (L x W x H)	71" x 23" x 43" (180 cm x 58.5 cm x 109 cm)
Net Weight	61.3 lbs (27.8 kg)



XGT 40V | 80V max BL MOTOR NEW

LM002GZ / LM002GT201

40V max XGT 21" Self-Propelled Lawn Mower w/XPT

Suitable for lawns up to 3,400 square meters (36,600 square feet)

Electric brake, soft start, variable speed

LM002GZ Includes: Tool Only. Batteries and Charger Sold Separately. Blade Set (191V96-5), Rod 6 (327589-6), Discharge Chute (413L57-8), Socket Wrench 17 (782210-8), Mulching Plug (413L55-2)

LM002GT201 Also Includes: BL4050F 40V max XGT Battery (5.0Ah x2) (BL4050F), Rapid Charger (DC40RC)

Battery Capacities	40V max XGT
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed:	
Normal Mode	2,800 RPM
Soft No-Load Mode	2,300 / 2,800 RPM
Noise Reduction Mode	2,300 RPM
Dimensions (L x W x H)	71-1/4" x 23-1/2"x 42-1/2" (181 cm x 59.5 cm x 108 cm)
Net Weight	67.7 lbs (30.7 kg)



18V + 18V 36V BL MOTOR NEW

DLM533Z

36V (18Vx2) LXT 21" Self-Propelled Lawn Mower w/XPT & ADT

Suitable for lawns up to 2,300 square meters (approx. 24,800 square feet)

- Commercial grade aluminum deck with 21" cutting width ensures the job is completed with fewer passes
- Adjustable self-propelled speeds with on / off switch provides operator comfort and reduces fatigue
- 3-in-1 capability enables mulching, rear bagging or rear discharge

DLM533Z Includes: Tool Only. Batteries and Charger Sold Separately. Blade Set (191D52-7), Rod 6 (327589-6), Socket Wrench 17 (782210-8), Socket Wrench 13 (782212-4), Mulching Plug Assembly (127550-1)

Battery Capacities	Two 18V LXT
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed	2,300 / 2800 RPM
Dimensions (L x W x H)	68-1/2" x 23-1/4" x 43-1/4" (174 cm x 59 cm x 110 cm)
Net Weight	101 lbs (45.8 kg)



18V + 18V 36V BL MOTOR

DLM536Z / DLM536PT4

36V (18Vx2) LXT 21" Self-Propelled Lawn Mower w/XPT

Suitable for lawns up to 2,300 square meters (approx. 24,800 square feet)

- Large steel deck with 21" cutting width ensures the job is completed with fewer passes

DLM536Z Includes: Tool Only. Batteries and Charger Sold Separately. Rod 6 (327589-6), Side Discharge Mouth (459887-1), Socket Wrench 13 (782212-4), Socket Wrench 17 (782210-8), Mulching Plug Assembly (127516-1)

DLM536PT4 Also Includes: BL1850B 18V LXT Battery (5.0Ah x4) (196675-2), Dual Port Rapid Charger (DC18RD)

Battery Capacities	Two 18V LXT
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed:	
Normal Mode	2,800 RPM
Energy-Saving Mode	2,300 RPM
Dimensions (L x W x H)	67-1/2" x 23-1/4" x 43" (171.5 cm x 59 cm x 109.5 cm)
Net Weight	91.3 lbs (41.4 kg)



18V + 18V 36V BL MOTOR

DLM530Z / DLM530PT2

36V (18Vx2) LXT 21" Lawn Mower w/XPT

Suitable for lawns up to 2,300 square meters (approx. 24,800 square feet)

- Large steel deck with 21" cutting width ensures the job is completed with fewer passes
- 3-in-1 capability enables mulching, rear bagging or side discharge

DLM530Z Includes: Tool Only. Batteries and Charger Sold Separately. Blade Set (191D52-7), Rod 6 (327589-6), Side Discharge Mouth (459887-1), Socket Wrench 17 (782210-8), Socket Wrench 13 (782212-4), Mulching Plug Assembly (127516-1)

DLM530PT2 Also Includes: BL1850B 18V LXT Battery (5.0Ah x2) (196675-2), Dual Port Rapid Charger (DC18RD)

Battery Capacities	Two 18V LXT
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed	2,300 RPM
Dimensions (L x W x H)	67-1/2" x 23-1/4" x 43" (171.5 cm x 59 cm x 119.5 cm)
Net Weight	76.8 lbs (34.8 kg)



18V + 18V 36V BL MOTOR NEW

DLM532Z

36V (18Vx2) LXT 21" Self-Propelled Lawn Mower w/XPT

Suitable for lawns up to 2,300 square meters (approx. 24,800 square feet)

- Large steel deck with 21" cutting width ensures the job is completed with fewer passes
- Adjustable self-propelled speeds with on / off switch provides operator comfort and reduces fatigue
- 3-in-1 capability enables mulching, rear bagging or side discharge

DLM532Z Includes: Tool Only. Batteries and Charger Sold Separately. Blade Set (191D52-7), Rod 6 (327589-6), Side Discharge Mouth (459887-1), Socket Wrench 17 (782210-8), Socket Wrench 13 (782212-4), Mulching Plug Assembly (127516-1)

Battery Capacities	Two 18V LXT
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed	2,300 RPM
Dimensions (L x W x H)	67-1/2" x 23-1/4"x 43" (171.5 cm x 59 cm x 119.5 cm)
Net Weight	84.5 lbs (38.3 kg)



18V + 18V 36V

DLM539Z / DLM539CT2

36V (18Vx2) LXT 21" Self-Propelled Lawn Mower w/XPT

Suitable for lawns up to 800 square meters (approx. 8,600 square feet)

- Large plastic deck with 21" cutting width ensures the job is completed with fewer passes
- 3-in-1 capability enables mulching, rear bagging or rear discharge

DLM539Z Includes: Tool Only. Batteries and Charger Sold Separately. Blade Set (191V96-5), Rod 6 (327589-6), Mulching Plug (413945-7), Socket Wrench 17 (782210-8)

DLM539CT2 Also Includes: BL1850B 18V LXT Battery (5.0Ah x2) (196675-2), Dual Port Charger (DC18SH)

Battery Capacities	Two 18V LXT
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed	3,000 RPM
Dimensions (L x W x H)	73-1/2" x 22-3/4" x 41" (187 cm x 58 cm x 104 cm)
Net Weight	64.7 lbs (29.3 kg)



18V + 18V 36V

DLM538Z

36V (18Vx2) LXT 21" Lawn Mower w/XPT

Suitable for lawns up to 800 square meters (approx. 8,600 square feet)

- Large plastic deck with 21" cutting width ensures the job is completed with fewer passes
- 3-in-1 capability enables mulching, rear bagging or rear discharge
- Grass level indicator shows operator when clipping bag is full

DLM538Z Includes: Tool Only. Batteries and Charger Sold Separately. Blade Set (191V96-5), Rod 6 (327589-6), Mulching Plug (413945-7), Socket Wrench 17 (782210-8)

Battery Capacities	Two 18V LXT
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed	3,000 RPM
Dimensions (L x W x H)	73-1/2" x 22-3/4" x 41" (187 cm x 58 cm x 104 cm)
Net Weight	58.9 lbs (26.7 kg)



18V + 18V 36V BL MOTOR NEW

DLM463Z

36V (18Vx2) LXT 18" Lawn Mower w/XPT

Suitable for lawns up to 800 square meters (approx. 8,600 square feet)

Soft start, Variable Speed, Constant Speed Control

- Makita-built Brushless Motor delivers up to 3,300 RPM
- 3-in-1 design allows for cutting, collecting and mulching
- Allows for bagging or mulching for added convenience

DLM463Z Includes: Tool Only. Batteries and Charger Sold Separately. Blade Set (199367-2), Socket Wrench 17 (782210-8), Mulching Plug Box (671 660 001)

Battery Capacities	Two 18V LXT
Cutting Width	18" (46 cm)
Range of Height	13/16" - 2-15/16" (2 - 7.5 cm)
Step	10 Steps
Grass Box Capacity	45 L
No Load Speed:	
Normal Mode	3,300 RPM
Energy-Saving Mode	2,500 RPM
Dimensions (L x W x H)	66-1/8" x 21" x 49-3/4" (168 cm x 53.2 cm x 126.5 cm)
Net Weight	58.9 lbs (26.7 kg)



18V + 18V 36V BL MOTOR

DLM460Z

36V (18Vx2) LXT 18" Lawn Mower w/XPT

Suitable for lawns up to 678 square meters (approx. 7,300 square feet)

Perfect for large lawns providing mulching and rear bagging capabilities

- Heavy duty durable steel deck provides 18" cut
- Mulching and rear bagging capabilities
- Quiet mode reduces noise by providing constant speed control at 2,500 RPM

DLM460Z Includes: Tool Only. Batteries and Charger Sold Separately. Blade Set (199367-2), Socket Wrench 17 (782210-8), Mulching Plug Box (671 660 001)

Battery Capacities	Two 18V LXT
Cutting Width	18" (46 cm)
Range of Height	13/16" - 2-15/16" (2 - 7.5 cm)
Step	10 Steps
Grass Box Capacity	60 L
No Load Speed	2,500 RPM
Dimensions (L x W x H)	66-1/8" x 21" x 49-3/4" (168 cm x 53.2 cm x 126.5 cm)
Net Weight	57.8 lbs (26.2 kg)



18V + 18V = 36V

DLM432Z / DLM432CT2

36V (18Vx2) LXT 17" Lawn Mower w/XPT

Suitable for lawns up to 560 square meters (approx. 6,027 square feet)

Lightweight plastic cutting deck

- 17" cutting width provides compact cutting solution for medium size lawns
- Design enables rear bagging or mulching capability with optional mulching plug set (part no. 191D46-2)

DLM432Z Includes: Tool Only. Batteries and Charger Sold Separately. Blade Set (191D43-8), Offset Wrench 13 (782210-8)

DLM432CT2 Also Includes: BL1850B 18V LXT Battery (5.0Ah x2) (196675-2), Dual Port Charger (DC18SH)

Battery Capacities	Two 18V LXT
Cutting Width	17" (43 cm)
Range of Height	13/16" - 2-15/16" (2 - 7.5 cm)
Step	13 Steps
Grass Box Capacity	50 L
No Load Speed	3,600 RPM
Dimensions (L x W x H)	55-1/2" x 17-3/4" x 39-1/2" (141 cm x 45 cm x 100.5 cm)
Net Weight	34.9 lbs (15.8 kg)



18V + 18V = 36V

DLM382Z / DLM382CM2

36V (18Vx2) LXT 15" Lawn Mower w/XPT

Suitable for lawns up to 560 square meters (approx. 6,000 square feet)

Lightweight plastic cutting deck

- 15" cutting width provides compact cutting solution for medium size lawns
- Design enables rear bagging or mulching capability with optional mulching plug set (part no. 191D46-2)

DLM382Z Includes: Tool Only. Batteries and Charger Sold Separately. Blade Set (191D41-2), Offset Wrench 13 (782016-4)

DLM382CM2 Also Includes: BL1840B 18V LXT Battery (4.0Ah x2) (196401-9), Dual Port Charger (DC18SH)

Battery Capacities	Two 18V LXT
Cutting Width	15" (38 cm)
Range of Height	13/16" - 2-15/16" (2 - 7.5 cm)
Step	13 Steps
Grass Box Capacity	40 L
No Load Speed	3,700 RPM
Dimensions (L x W x H)	55-1/2" x 17-3/4" x 39-1/2" (141 cm x 45 cm x 100.5 cm)
Net Weight	33.6 lbs (15.2 kg)



18V

NEW DLM330Z / DLM330M001

18V LXT 13" Lawn Mower w/XPT

Suitable for lawns up to 270 square meters (approx. 2,900 square feet)

- Compact 13" plastic deck ideal for detailed landscaping and small gardens
- 13" cutting width for small spaces
- 3-in-1 design allows for cutting, collecting and mulching
- Allows for bagging or mulching for added convenience

DLM330Z Includes: Tool Only. Batteries and Charger Sold Separately. Blade Set (GB00000042), Wrench 13 (GB00000134)


DLM330M001 Also Includes: BL1840B 18V LXT Battery (4.0Ah) (196401-9), Standard Charger

Battery Capacities	18V LXT
Cutting Width	13" (33 cm)
Range of Height	13/16" - 2-15/16" (2 - 7.5 cm)
Step	8 Steps
Grass Box Capacity	30 L
No Load Speed	4,300 RPM
Dimensions (L x W x H)	55-3/4" x 14-3/4" x 40-1/4" (141.5 cm x 37.5 cm x 102 cm)
Net Weight	28.0 lbs (12.7 kg)

SPLIT-SHAFT POWER UNITS

XGT/LXT





See page 22 of this catalogue for Makita's complete lineup of

SPLIT-SHAFT POWER UNIT ATTACHMENTS



XGT 40V | 80V max BL MOTOR

UX01GZ02

40V max XGT 16-1/2" Split Shaft Line Trimmer w/XPT & AFT

Power unit is part of the Makita split shaft multi tool system

Tool-less release system for quick disconnect of line trimmer

- Use with up to 13 different attachments, including pole saws, hedge trimmers, blowers and more
- Smaller protector guard increases cutting area visibility
- Straight shaft style provides greater reach compared to a curved shaft
- 3-speed options (Low: 5,700 RPM, Medium: 8,200 RPM, High: 9,700 RPM) for active power management

UX01GZ02 Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (191R00-0), Shoulder Harness (127759-5), Hex Wrench 4 (783202-0), Box Wrench 17 (782238-6), Accessory Bag (831304-7), Line Trimmer Attachment (EM405MP)

Battery Capacities	40V max XGT
No Load Speed:	0 - 9,700 / 0 - 8,200 / 0 - 5,700 RPM
Overall Length	39-1/2" (100.1 cm)
Net Weight	10.7 lbs (4.81 kg)



XGT 40V | 80V max BL MOTOR

UX01GZ

40V max XGT Split Shaft Power Unit w/XPT & AFT

Power unit is part of the Makita split shaft multi tool system

Tool-less release system for quick disconnect of attachments

- Use with up to 13 different attachments, including pole saws, hedge trimmers, blowers and more
- 3-speed options (Low: 5,700 RPM, Medium: 8,200 RPM, High: 9,700 RPM) for active power management
- IPX4 rated for maximum weather and water resistance
- Variable 3-speed push-button control enables operator to adjust speed based on different attachments or applications
- Reverse mode for clearing entangled debris from the cutting head

UX01GZ Includes: Tool Only. Batteries and Charger Sold Separately. Shoulder Harness (127759-5), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

Battery Capacities	40V max XGT
No Load Speed:	0 - 9,700 / 0 - 8,200 / 0 - 5,700 RPM
Overall Length	39-1/2" (100.1 cm)
Net Weight	8.6 lbs (3.9 kg)



18V + 18V 36V BL MOTOR

DUX60ZM5X / DUX60PGM5X / DUX60PTM5X

36V (18Vx2) LXT 16-1/2" Split Shaft Line Trimmer w/XPT & AFT

Power unit is compatible with Makita split shaft attachments

Tool-less release system for quick disconnect of line trimmer

- Smaller protector guard increases cutting area visibility
- Straight shaft style provides greater reach compared to a curved shaft
- Reverse mode for clearing entangled debris from the cutting head

DUX60ZM5X Includes: Tool Only. Batteries and Charger Sold Separately. Line Trimmer (Straight Shaft) Attachment - Small Guard (EM405MP), Shoulder Harness (127508-0), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

DUX60PGM5X Also Includes: BL1860B 18V LXT Battery (6.0Ah x2) (197424-0), Dual Port Rapid Charger (DC18RD)

DUX60PTM5X Also Includes: BL1850B 18V LXT Battery (5.0Ah x2) (196675-2), Dual Port Rapid Charger (DC18RD)

Battery Capacities	Two 18V LXT
No Load Speed:	0 - 9,700 / 0 - 8,200 / 0 - 5,700 RPM
Overall Length	39-3/4" (101.1 cm)
Net Weight	12.6 lbs (5.7 kg)



18V + 18V 36V BL MOTOR

DUX60Z

36V (18Vx2) LXT Split Shaft Power Unit w/XPT & AFT

The versatility of a split shaft multi attachment power head in cordless

Perfect for the person who wants only one power unit and several options to expand

- High power brushless motor allows for heavy work loads
- High / Medium / Low 3-speed selection and variable speed control by trigger
- Variable speed control allows the user to match speed to application
- Multi-tool system consisting of power head and several versatile optional attachments is ideal for a wide range of applications
- Electric brake for maximum productivity and increased operator safety

DUX60Z Includes: Tool Only. Batteries and Charger Sold Separately. Shoulder Harness (127508-0), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

Battery Capacities	Two 18V LXT
No Load Speed:	0 - 9,700 / 0 - 8,200 / 0 - 5,700 RPM
Overall Length	39-3/4" (101.1 cm)
Net Weight	9.8 lbs (4.4 kg)



18V BL MOTOR

DUX18RMX12

18V LXT Split-Shaft Pole Chainsaw w/XPT & AFT

The perfect tool to tackle all of your property maintenance tasks in one tool

Variable 2-speed, electric brake, constant speed control

- Use with up to 13 different attachments, including line trimmers, pole saws, hedge trimmers, blowers and more
- Variable 2-speed push-button control with variable speed trigger enables operator to adjust speed based on different attachments or applications
- Soft start feature gradually increases speed to eliminate start up shock

DUX18RMX12 Includes: BL1840B 18V LXT Battery (4.0Ah x2) (196401-9), Rapid Charger (DC18RC), Battery Cover (450128-8), Shoulder Harness (127508-0), Hex Wrench 4 (783202-0), Accessory Bag (831304-7), Pole Chain Saw Attachment (EY402MP)

Battery Capacities	18V LXT
No Load Speed:	0 - 9,700 / 0 - 6,800 RPM
Overall Length	38-1/2" (97.7 cm)
Net Weight	6.3 lbs (7.3 kg)



18V BL MOTOR

DUX18ZX2 / DUX18RMEX2

18V LXT 13" Split Shaft Line Trimmer w/XPT & AFT

The perfect tool to tackle all of your property maintenance tasks in one tool

Variable 2-speed, electric brake, constant speed control

- Use with up to 13 different attachments, including line trimmers, pole saws, hedge trimmers, blowers and more
- Variable 2-speed push-button control with variable speed trigger enables operator to adjust speed based on different attachments or applications

DUX18ZX2 Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (191R00-0), Shoulder Harness (127508-0), Hex Wrench 4 (783202-0), Box Wrench 17 (782238-6), Accessory Bag (831304-7), Trimmer Attachment (EM409MP)

DUX18RMEX2 Also Includes: BL1840B 18V LXT Battery (4.0Ah x2) (196401-9), Rapid Charger (DC18RC)

Battery Capacities	18V LXT
No Load Speed:	0 - 9,700 / 0 - 6,800 RPM
Overall Length	38-1/2" (97.7 cm)
Net Weight	6.3 lbs (7.3 kg)



18V BL MOTOR

DUX18Z

18V LXT Split Shaft Power Unit w/XPT & AFT

The perfect tool to tackle all of your property maintenance tasks in one tool

Variable 2-speed, electric brake, constant speed control

- Use with up to 13 different attachments, including line trimmers, pole saws, hedge trimmers, blowers and more
- Variable 2-speed push-button control with variable speed trigger enables operator to adjust speed based on different attachments or applications
- Soft start feature gradually increases speed to eliminate start up shock
- Constant speed control maintains constant speed under heavy load

DUX18Z Includes: Tool Only. Batteries and Charger Sold Separately. Shoulder Harness (127508-0), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

Battery Capacities	18V LXT
No Load Speed:	0 - 9,700 / 0 - 6,800 RPM
Overall Length	38-1/2" (97.7 cm)
Net Weight	5.3 lbs (2.4 kg)

SPLIT-SHAFT POWER UNIT ATTACHMENTS



Line Trimmer (Straight Shaft) Attachment w/Large Guard - EM401MP / EM400MP

Straight shaft style preferred by professional end users.

EM401MP Includes Parts For Brush Cutter. Blade Sold Separately.

Cutting Width	16-1/2" (42 cm)
Spindle Size / Thread	M10, Left Handed
Overall Length	34-1/2" (87.6 cm)
Net Weight	2.2 lbs (1.0 kg)



Line Trimmer (Straight Shaft) Attachment w/Small Guard - EM405MP

Straight shaft style preferred by professional end users due to longer reach.

Cutting Width	16-1/2" (42 cm)
Spindle Size / Thread	M10, Left Handed
Overall Length	34-1/2" (87.6 cm)
Net Weight	2.8 lbs (1.3 kg)



Line Trimmer (Straight Shaft) Attachment w/Small Guard - EM409MP

Straight shaft style preferred by professional end users due to longer reach.

Cutting Width	13" (33 cm)
Spindle Size / Thread	M10, Left Handed
Overall Length	36-1/4" (92 cm)
Net Weight	2.7 lbs (1.2 kg)



Extension Shaft Attachment - LE400MP

Enables operator to achieve added reach when used with Pole Hedge Trimmer Attachment or Pole Chain Saw Attachment.

Overall Length	45" (114.3 cm)
Shaft Length	42-1/2" (107.9 cm)
Net Weight	2.5 lbs (1.13 kg)



Articulating Hedge Trimmer Attachment - EN401MP

Ideal for trimming hard to reach areas of hedges and bushes. 135° cutting radius for maximum versatility of operation.

Cutting Length	20" (50.8 cm)
Cutting Radius	135° (90° / 45°)
Shaft Length	59" (150 cm)
Net Weight	5.4 lbs (2.4 kg)



Straight Hedge Trimmer Attachment - EN410MP

Compact and lightweight design ideal for trimming hedges and shrubs.

Cutting Length	19-1/4" (49 cm)
Shaft Length	43-1/2" (110,4 cm)
Net Weight	4.5 lbs (2.0 kg)



NEW Ground Trimmer Attachment - EN424MP

T-shape structure enables user to trim grass simply by pushing the blade forward without swinging it right and left.

Effective Cutting Length	13" (33 cm)
Tooth Thickness	1/16" (0.2 cm)
Tooth Spacing	1-1/8" (2.8 cm)
Overall Length	32-1/4" (82 cm)
Net Weight	5.1 lbs (2.3 kg)



NEW Articulating Pole Hedge Trimmer Attachment - EN402MP

The head angle adjustable in 13 stages between 90° up and 90° down, making it suitable for trimming hard to reach angles precisely

Effective Cutting Length	19-3/4" (50 cm)
Maximum Branch Diameter	13/16" (2 cm)
Overall Length	57" (144.4 cm)
Net Weight	5.3 lbs (2.4 kg)



NEW Articulating Ground Trimmer Attachment - EN422MP

Effortlessly tackles trimming tasks, offering an incredible 135° blade adjustment angle.

Cutting Length	9-7/8" (25 cm)
Cutting Radius	135° (90° / 45°)
Overall Length	47-1/2" (120.8 cm)
Net Weight	4.9 lbs (2.2 kg)



Pole Chainsaw Attachment - EY402MP

Ideal for pruning branches in tall trees or in hard to reach areas. Integrated branch hook helps remove cut branches from trees.

Guide Bar Length	10" (25 cm)
Chain Gauge	0.043"
Chain Pitch	3/8"
Oil Tank Capacity	160 ml
Overall Length	45-1/2" (115.9 cm)
Net Weight	4.2 lbs (1.9 kg)



Cultivator Attachment - KR401MP

Ideal for cultivating small garden beds and between existing rows of vegetables or flowers.

Outer Blade Diameter	8-5/8" (22 cm)
Cultivating Width	8-5/8" (22 cm)
Overall Length	38" (96.5 cm)
Net Weight	6.5 lbs (2.9 kg)



Edger Attachment - EE400MP

Quickly and easily cuts through turf to define edge of garden beds, sidewalks, driveways and more.

Blade Diameter	8" (20.3 cm)
Overall Length	35-1/2" (90.1 cm)
Net Weight	5.4 lbs (2.4 kg)



NEW Pump Attachment - PF400MP

Maximum suction height of 13 m and flow of 135 L per minute enabling quick water pumping-up, draining or sprinkling. Low weight of just 1 kg for the pump attachment to help reduce fatigue.

Maximum Suction Height w/UX01G	
High / Medium / Low:	0-13.0 m / 0-10.0 m / 0-6.0 m (0-42.7 ft / 0-32.8 ft / 0-19.7 ft)
Maximum Flow w/UX01G	
High / Medium / Low:	135 L/mi / 115 L/mi / 80 L/mi
Overall Length	22-1/2" (57 cm)
Net Weight	2.2 lbs (1.0 kg)



579 CFM Blower Attachment - UB401MP

Use with optional Gutter Cleaning Attachment (part no. 191B03-8 and 191J13-3) for maximum vertical reach.

Maximum Air Velocity	146 MPH (65.3 m/s)
Maximum Air Volume	579 CFM (16.4 m^3/min)
No Load Speed (RPM)	9,450 RPM
Overall Length	35-1/4" (89.5 cm)
Net Weight	4.6 lbs (2.1 kg)



Power Brush Attachment - BR400MP

The power bristle brush attachment is an effective tool for removing debris from cracks and crevices of hard surfaces.

Brush Diameter	9-7/8" (25 cm)
Brush Width	23-5/8" (60 cm)
Overall Length	45" (114.5 cm)
Net Weight	13.9 lbs (6.3 kg)



Power Sweep Attachment - SW400MP

Power Sweep paddle attachment cleans up dirt along roads and sidewalks, sand in turf, as well as water and light snow.

Sweep Drum Diameter	10-3/8" (26.5 cm)
Sweep Drum Width	23-1/4" (59 cm)
Overall Length	45-1/2" (111.6 cm)
Net Weight	15.8 lbs (7.2 kg)

BRUSH CUTTERS

XGT





XGT 40V | 80V max BL MOTOR

UR012GZ01

80V (40Vx2) max XGT 10" Brush Cutter w/AFT & ADT

Power and performance equivalent to a 40cc engine Brush Cutter

Soft start, constant speed control, current limiter

- Variable 3-speed control allows operator to adjust cutting speed based on material or application
- Electronic current limiter prevents motor burnout caused by overloading
- Electric brake brings blade to a stop in 3-5 seconds for maximum operator safety
- Constant speed control maintains constant speed under heavy load

UR012GZ01 Includes: Tool Only. Batteries and Charger Sold Separately. Brush Cutter Blade 4T (B-14124), Tool Cover (456924-2), Shoulder Harness (122A37-4), Hex Wrench 4 (783202-0), Hex Wrench 5 (783217-7), Accessory Bag (831304-7), Wire Clamp (455588-9), Box Wrench 17 (782238-6)

Battery Capacities	Two 40V max XGT
No Load Speed:	0 - 3,500 / 0 - 5,000 / 0 - 6,400 RPM
Cutting Width	10" (25.5 cm)
Overall Length	70-1/2" (179 cm)
Net Weight	14.9 lbs (6.7 kg)



XGT 40V | 80V max BL MOTOR *NEW*

UR013GZ / UR013GT201

40V max XGT 10" Brush Cutter w/AFT

1.5 kW powerful Brushless motor produces power equivalent to 35cc gas models

Features a bike handle design for improved control

- 2 stage speed control with up to 6,700 RPM on high-torque mode for heavy-duty applications
- Variable speed control lever enables user to comfortably adjust and hold the desired speed based on job requirements
- Electric brake brings blade to a stop in 3-5 seconds for maximum operator safety

UR013GZ Includes: Tool Only. Batteries and Charger Sold Separately. 10" Star Blade (B-14124), Tool Cover (456924-2), Hex Wrench 5 (783217), Hex Wrench 4 (783202-0), Box Wrench 17 (782238-6), Shoulder Harness (122A37-4), Accessory Bag (831304-7)

UR013GT201 Also Includes: BL4050F 40V max XGT Battery (5.0Ah) (BL4050F), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
No Load Speed	0 - 6,700 RPM
Cutting Width	10" (25.5 cm)
Overall Length	73-1/2" (186.3 cm)
Net Weight	11.7 lbs (5.3 kg)



XGT 40V | 80V max BL MOTOR

UR006GZ01 / UR006GT101

40V max XGT 9" Brush Cutter w/AFT & ADT

Features a bike handle design for improved grip

- Equivalent to a 30cc gas model
- 3 speed options (Low: 4,600 RPM, Medium: 5,500 RPM, High: 7,000 RPM) for power management
- Reverse rotation function allows operator to quickly clear trimmer head of entangled grass and weeds
- New adjustable tool-less quick fastening offset bike handle for operator comfort

UR006GZ01 Includes: Tool Only. Batteries and Charger Sold Separately. 9" Star Blade (D-74859), Protective Guard (191B54-1), Shoulder Harness (122A37-4), Tool Cover (456924-2), Box Wrench 17 (782238-6), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

UR006GT101 Also Includes: BL4050F 40V max XGT Battery (5.0Ah x2) (BL4050F), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
No Load Speed:	0 - 4,600 / 0 - 5,500 / 0 - 7,000 RPM
Cutting Width	9" (23 cm) with 4 Tooth Blade
Overall Length	71-1/2" (181.5 cm)
Net Weight	10.8 lbs (4.8 kg)

LINE TRIMMERS

XGT/LXT/CXT





XGT 40V | 80V max BL MOTOR *NEW*

UR014GZ01 / UR014GT202

40V max XGT 17-3/4" Line Trimmer w/AFT

1.5 kW powerful Brushless motor produces power equivalent to 35cc gas model

- 2 stage speed control with up to 5,700 RPM on high-torque mode for heavy-duty applications
- Reverse rotation function allows user to select blade rotation direction based on job requirements
- Variable speed control lever enables user to comfortably adjust and hold the desired speed based on job requirements

UR014GZ01 Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (1911Y3-7), Protector (413N78-2), Shoulder Harness (127759-5), Socket Wrench 17 (782210-8), Hex Wrench 4 (783202-0), Hex Wrench 5 (783217-7), Accessory Bag (831304-7)

UR014GT202 Also Includes: BL4050F 40V max XGT Battery (5.0Ah x2) (BL4050F), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
No Load Speed	0 - 5,700 RPM
Cutting Width	17-3/4" (45 cm)
Overall Length	73" (185.7 cm)
Net Weight	10.6 lbs (4.8 kg)



XGT 40V | 80V max BL MOTOR

UR008GZ01 / UR008GT101

40V max XGT 17" Line Trimmer w/XPT, AFT & ADT

Heavy duty trimming power equivalent to a 30cc gas model

- Automatic Torque Drive Technology (ADT) mode automatically shifts from 4,000-6,000 RPM for extended run time or added power
- 3 speed options (Low: 4,000 RPM, Medium: 4,600 RPM, High: 6,000 RPM) for power management
- Reverse rotation function allows operator to quickly clear trimmer head of entangled grass and weeds

UR008GZ01 Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (191R00-0), Protective Guard (191B55-9), Shoulder Harness (127759-5), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

UR008GT101 Also Includes: BL4050F 40V max XGT Battery (5.0Ah) (BL4050F), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
No Load Speed:	0 - 4,000 / 0 - 4,600 / 0 - 6,000 RPM
Cutting Width	17" (43 cm)
Overall Length	71" (180.3 cm)
Net Weight	9.5 lbs (4.3 kg)



XGT 40V | 80V max BL MOTOR

UR002GZ

40V max XGT 15" Line Trimmer w/XPT, AFT & ADT

3-speed options (low: 3,500 RPM, medium: 5,300 RPM, high: 6,500 RPM) for power management

Features a bike handle design for improved control

- Direct drive outer-rotor BL motor provides high power and increased torque for demanding cutting applications
- Electronic 3-speed push-button control with variable speed trigger
- Reverse rotation function allows operator to quickly clear trimmer head of entangled grass and weeds
- Electric brake stops blade after the trigger is released for increased operator safety

UR002GZ Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (197296-3), Protective Guard (459504-3), Shoulder Harness (122906-3), Hex Wrench 5 (783217-7), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

Battery Capacities	40V max XGT
No Load Speed:	3,500 / 5,300 / 6,500 RPM
Cutting Width	15" (38 cm)
Overall Length	68-1/4" (176 cm)
Net Weight	8.7 lbs (3.9 kg)



XGT 40V | 80V max BL MOTOR

UR003GZ

40V max XGT 15" Line Trimmer w/XPT, AFT & ADT

3-speed options (low: 3,500 RPM, medium: 5,300 RPM, high: 6,500 RPM) for power management

- Direct drive outer-rotor BL motor provides high power and increased torque for demanding cutting applications
- Electronic 3-speed push-button control with variable speed trigger
- Reverse rotation function allows operator to quickly clear trimmer head of entangled grass and weeds
- Electric brake stops blade after the trigger is released for increased operator safety

UR003GZ Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (197296-3), Protective Guard (459504-3), Shoulder Harness (127508-0), Box Driver 16-17 (783013-3), Hex Wrench 4 (783202-0), Hex Wrench 5 (783217-7), Accessory Bag (831304-7)

Battery Capacities	40V max XGT
No Load Speed:	3,500 / 5,300 / 6,500 RPM
Cutting Width	15" (38 cm)
Overall Length	68-1/4" (176 cm)
Net Weight	7.6 lbs (3.4 kg)



18V + 18V 36V BL MOTOR

DUR369NZ

36V (18Vx2) LXT 17" Line Trimmer w/XPT, AFT & ADT

Our most powerful line trimmer equipped with a 1.0 kW motor

- 1.0 kW motor with power equivelant to a 30cc gas motor
- Automatic Torque Drive Technology (ADT) mode automatically shifts from 4,000-6,000 RPM for extended run time or added power
- 3 speed options (Low: 4,000 RPM, Medium: 4,600 RPM, High: 6,000 RPM) for power management
- 17" cutting swath for increased productivity
- Includes bump and feed trimmer head loaded with .080" twisted quiet line

DUR369NZ Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (191R00-0), Protective Guard (191B55-9), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

Battery Capacities	Two 18V LXT
No Load Speed:	4,000 / 4,600 / 6,000 RPM
Cutting Width	17" (43 cm)
Overall Length	72-1/2" (183.4 cm)
Net Weight	10.6 lbs (4.8 kg)



18V + 18V 36V BL MOTOR

DUR368AZ

36V (18Vx2) LXT 15" Line Trimmer w/XPT, AFT & ADT

3 speed options (Low: 3,500 RPM, Medium: 5,300 RPM, High: 6,500 RPM) for power management

Features a bike handle design for improved control

- Direct drive outer-rotor BL motor provides high power and increased torque for demanding cutting applications
- Includes bump and feed trimmer head loaded with 0.080" twisted quiet line
- Reverse rotation function allows operator to quickly clear trimmer head of entangled grass and weeds
- Steel drive shaft for less vibration and longer life

DUR368AZ Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (191R00-0), Protective Guard (459504-3), Shoulder Harness (122A37-4), Hex Wrench 4 (783202-0), Hex Wrench 5 (783217-7), Accessory Bag (831304-7)

Battery Capacities	Two 18V LXT
No Load Speed:	3,500 / 5,300 / 6,500 RPM
Cutting Width	15" (38 cm)
Overall Length	69-1/4" (175.8 cm)
Net Weight	7.5 lbs (3.4 kg)



18V + 18V 36V BL MOTOR

DUR368LZ / DUR368LPT2

36V (18Vx2) LXT 15" Line Trimmer w/XPT, AFT & ADT

3 speed options (Low: 3,500 RPM, Medium: 5,300 RPM, High: 6,500 RPM) for power management

- Direct drive outer-rotor BL motor provides high power and increased torque for demanding cutting applications
- Includes bump and feed trimmer head loaded with 0.080" twisted quiet line
- Reverse rotation function allows operator to quickly clear trimmer head of entangled grass and weeds
- Steel drive shaft for less vibration and longer life

DUR368LZ Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (191R00-0), Protective Guard (459504-3), Shoulder Harness (127508-0), Hex Wrench 4 (783202-0), Hex Wrench 5 (783217-7), Accessory Bag (831304-7)

DUR368LPT2 Also Includes: BL1850B 18V LXT Battery (5.0Ah x2) (196675-2), Dual Port Rapid Charger (DC18RD)

Battery Capacities	Two 18V LXT
No Load Speed:	3,500 / 5,300 / 6,500 RPM
Cutting Width	15" (38 cm)
Overall Length	69-1/4" (175.8 cm)
Net Weight	7.1 lbs (3.2 kg)



36V (18Vx2) BL MOTOR

DUR364LZ

36V (18Vx2) LXT 13-3/4" Line Trimmer w/XPT

Powerful trimming where low noise is a concern

- Electronic current limiter for overload protection
- Dual LED charge level indicators display approximate remaining Battery power
- Soft start feature for added motor protection
- Brushless motor with electronic 2 speed selection
- Reverse switch for easy removal of stuck grass clippings in the trimmer head

DUR364LZ Includes: Tool Only. Batteries and Charger Sold Separately. Bump and Feed Trimmer Head Assembly (197297-1), Hex Wrench 5 (783217-7), Hex Wrench 4 (783202-0), Accessory Bag (831304-7), Protector (455622-5)

Battery Capacities	Two 18V LXT
No Load Speed:	5,000 / 6,500 RPM
Cutting Width	13-3/4" (35 cm)
Overall Length	69" (175 cm)
Net Weight	7.3 lbs (3.3 kg)



18V BL MOTOR

DUR190LZX3

18V LXT 13" Line Trimmer w/XPT, AFT & ADT

Designed for use in residential and public spaces offering low noise levels

3-speed, reversible

- Includes bump and feed trimmer head with 0.080" twisted quiet line
- 3-speed options (Low: 3,500 RPM, Medium: 5,100 RPM, High: 6,000 RPM) for active power management
- Front mounted operator controls for easy access and quick adjustments
- Reverse mode for clearing entangled debris from the cutting head

DUR190LZX3 Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (191R00-0), Protective Guard (412580-8), Shoulder Harness (127508-0), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

Battery Capacities	18V LXT
No Load Speed:	3,500 / 5,100 / 6,000 RPM
Cutting Width	13" (33 cm)
Overall Length	70" (177.5 cm)
Net Weight	5.6 lbs (2.5 kg)



18V BL MOTOR

DUR191LZX3

18V LXT 13" 2 Piece Line Trimmer w/XPT, AFT & ADT

2pc quick release system shortens overall length from 70" to 39.5" for easy transportation

3-speed, reversible

- 2 pc line trimmer operates independently from Makita split shaft attachments
- Includes bump and feed trimmer head with 0.080" twisted quiet line
- 3-speed options (Low: 3,500 RPM, Medium: 5,100 RPM, High: 6,000 RPM) for active power management
- Tool-less release system for quick disconnect of line trimmer into 2 pcs

DUR191LZX3 Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (191R00-0), Protective Guard (412580-8), Shoulder Harness (127508-0), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

Battery Capacities	18V LXT
No Load Speed:	3,500 / 5,100 / 6,000 RPM
Cutting Width	13" (33 cm)
Overall Length	70" (177.5 cm)
Net Weight	6.2 lbs (2.8 kg)



18V BL MOTOR

DUR192LZX1 / DUR192LST1

18V LXT 13" Line Trimmer w/XPT

Lightweight and powerful with low noise level suitable for use in residential areas and public spaces

- Includes bump and feed trimmer head with 0.080" twisted quiet line
- 2-speed options (Low: 4,500 RPM, High: 6,000 RPM) for active power management
- Variable speed trigger for precise amount of power within each setting
- Electric brake for increased operator safety
- Soft start feature gradually increases speed to eliminate start up shock

DUR192LZX1 Includes: Tool Only. Batteries and Charger Sold Separately. Line Trimmer (Straight Shaft) Attachment - Small Guard (EM405MP), Shoulder Harness (127508-0), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

DUR192LST1 Also Includes: BL1850B 18V LXT Battery (5.0Ah) (196675-2), Standard Charger (DC18SD)

Battery Capacities	18V LXT
No Load Speed:	0 - 4,500 / 0 - 6,000 RPM
Cutting Width	13" (33 cm)
Overall Length	65-3/4" (167 cm)
Net Weight	5.1 lbs (2.3 kg)



18V BL MOTOR

DUR189Z

18V LXT 11-3/4" Line Trimmer w/XPT & ADT

Lightweight and powerful with low noise level suitable for use in residential areas and public spaces

- Telescoping curved shaft adjusts (60-1/2" - 64-1/2" length) for convenient operation in tight places
- Battery protection system provides over-discharge temperature and circuit protection for enhanced performance, and overall Battery life
- Front mounted operator controls for easy function changes during use
- Reverse switch for clearing entangled weeds and grass from cutting head

DUR189Z Includes: Tool Only. Batteries and Charger Sold Separately. Bump & Feed Trimmer Head (198972-2), Shoulder Harness (127508-0), Hex Wrench 4 (783202-0), Hex Wrench 5 (783217-7), Protective Guard (456651-1), Accessory Bag (831304-7)

Battery Capacities	18V LXT
No Load Speed:	4,000 / 5,000 / 6,000 RPM
Cutting Width	11-3/4" (30 cm)
Overall Length	63-1/2" (161 cm)
Net Weight	5.8 lbs (2.6 kg)



18V

DUR193Z / DUR193M001

18V LXT 10-1/4" Line Trimmer w/XPT

Well balanced design with fully adjustable features to suit any operator

- Adjustable trimmer head features 5 angled cutting positions (0°, 15°, 30°, 45°, 60°) for maximum versatility and ease of operation when trimming around obstacles
- Trimmer head rotates 180° to enable easy edge trimming
- Reduced weight for optimal balance and easy handling
- Telescopic shaft with lever release adjusts quickly and easily to suit any operator
- Lock-off safety lever prevents accidental start up

DUR193Z Includes: Tool Only. Batteries and Charger Sold Separately. Nylon Cutting Head (191Y39-5), Protective Guard (413F73-4), Shoulder Harness (127508-0)

DUR193M001 Also Includes: BL1840B 18V LXT Battery (4.0Ah) (196401-9), Standard Charger

Battery Capacities	18V LXT
No Load Speed	7,800 RPM
Cutting Width	10-1/4" (26 cm)
Overall Length	47-1/4" - 54-1/2"(119 cm - 138 cm)
Net Weight	4.2 lbs (1.9 kg)



12V max CXT

UR100DZX

12V max CXT Li-Ion 9" Nylon Blade Trimmer w/XPT

Well balanced design with adjustable features to suit any operator

- Adjustable front grip features 6 angled positions for maximum versatility and ease of operation when trimming on slopes or while using as an edger
- Telescopic shaft adjusts quickly and easily to suit any operator (33-1/2" to 47-1/4")
- Standard equipped with 9" nylon blade cutting head (optional nylon trimmer line head 10-1/4" available)
- Lock-off safety lever prevents accidental start up

UR100DZX Includes: Tool Only. Batteries and Charger Sold Separately. Plastic Blade (198847-5), Spare Blade Set (198851-4), Protective Guard (135950-1), Shoulder Harness (125516-5), Hex Wrench 4 (783202-0), Accessory Bag (831304-7)

Battery Capacities	12V max CXT Li-Ion
No Load Speed	10,000 RPM
Cutting Width	9" (23 cm)
Overall Length	46-3/4" (118 cm)
Net Weight	4.3 lbs (1.73 kg)

DETHATCHER / SCARIFIER

XGT





XGT 40V | 80V max BL MOTOR

New

UV001GZ

40V max XGT 15" Dethatcher / Scarifier w/XPT

Covers up to 5,500 square feet (510 square meters) with two 8.0Ah batteries


- Thatching tines for dethatching or vertical cutter for lawn roots has a working width of 15" in a single pass
- Depth control dial allows the operator to precisely set the working height from 0.5 cm high to 1.2 cm deep for optimum ground contact
- Automated battery switching system seamlessly switches to the second battery, when the active battery is depleted

UV001GZ Includes: Tool Only. Batteries and Charger Sold Separately. Vertical Cutter (1913J5-0), Thatching Blade (1913J7-6), Socket Wrench (782223-9)

Battery Capacities	40V max XGT
Working Width	15" (38 cm)
Working Depth	+3/16" to -15/32" (+0.5 cm to -1.2 cm)
Grass Box Capacity	50 L
No Load Speed	3,200 RPM
Dimensions (L x W x H)	48-3/4" x 26-3/4" x 45-1/2" (124 cm x 68 cm x 115.5 cm)
Net Weight	44.1 lbs (20.0 kg)

HEDGE TRIMMERS

XGT / LXT / GAS

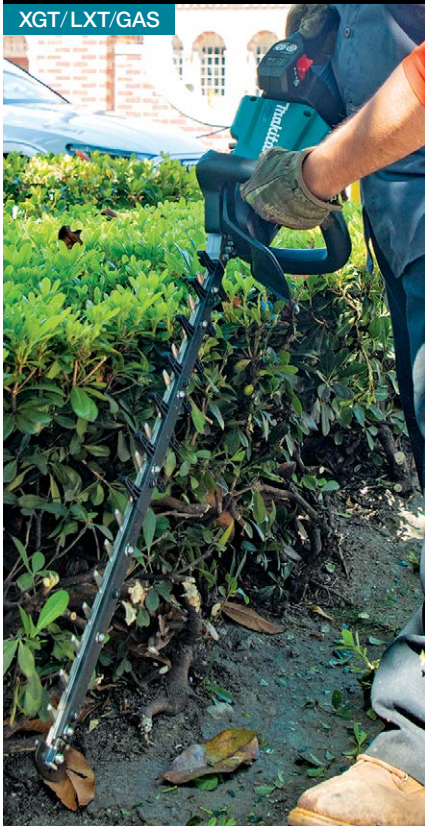



XGT 40V | 80V max BL MOTOR

UH005GZ

40V max XGT 30" Hedge Trimmer

Features sharp curved edge blade for trimming thin branches up to 15/16"

3-speed, reversible, electric brake, constant speed control

- Sharp curved edge blade features inclined/curved tooth to easily catch and hold branches with reduced friction resistance for maximum energy efficiency
- 3-speed range enables operator to adjust cutting speed based on materials or application
- Use with optional chip receiver (191R52-1) for easy leaf, twig and debris collection
- 5 position rotating rear handle

UH005GZ Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Set (191R54-7), Blade Cover (412912-9)

Battery Capacities	40V max XGT
Strokes Per Minute (min^{-1}):	2,000 / 3,600 / 5,000 SPM
Cutting Length	30" (75 cm)
Maximum Cutting Thickness	15/16" (23.5 mm)
Overall Length	49-3/4" (126.3 cm)
Net Weight	8.4 lbs (3.8 kg)



XGT 40V | 80V max BL MOTOR

UH004GZ

40V max XGT 24" Hedge Trimmer

Features sharp curved edge blade for trimming thin branches up to 15/16"

3-speed, reversible, electric brake, constant speed control

- Sharp curved edge blade features inclined/curved tooth to easily catch and hold branches with reduced friction resistance for maximum energy efficiency
- 3-speed range enables operator to adjust cutting speed based on materials or application
- Use with optional chip receiver (191R51-3) for easy leaf, twig and debris collection
- 5 position rotating rear handle

UH004GZ Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Set (191R53-9), Blade Cover (412911-1)

Battery Capacities	40V max XGT
Strokes Per Minute (min^{-1}):	2,000 / 3,600 / 5,000 SPM
Cutting Length	24" (60 cm)
Maximum Cutting Thickness	15/16" (23.5 mm)
Overall Length	44" (112 cm)
Net Weight	7.9 lbs (3.6 kg)



XGT 40V | 80V max BL MOTOR

UH006GZ

40V max XGT 24" Hedge Trimmer

Features sharp edge blade for rough cutting of thick branches up to 1"

3-speed, reversible, electric brake, constant speed control

- Sharp edge blade features inclined/curved tooth to easily catch and hold branches
- 3-speed range enables operator to adjust cutting speed based on materials or application
- Use with optional chip receiver (191R51-3) for easy leaf, twig and debris collection
- 5 position rotating rear handle
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety

UH006GZ Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Set (191R55-5), Blade Cover (412911-1)

Battery Capacities	40V max XGT
Strokes Per Minute (min^{-1}):	2,000 / 3,000 / 4,000 SPM
Cutting Length	24" (60 cm)
Maximum Cutting Thickness	1" (25 mm)
Overall Length	44-1/4" (112.3 cm)
Net Weight	8.1 lbs (3.7 kg)



XGT 40V | 80V max BL MOTOR

UH008GZ

40V max XGT 24" Hedge Trimmer

Features standard blade for trimming thin branches up to 27-32"

3-speed, reversible, electric brake, constant speed control

- Standard blade with dual cutting action cuts quickly with shearing effect
- 3-speed range enables operator to adjust cutting speed based on materials or application
- Use with optional chip receiver (191R51-3) for easy leaf, twig and debris collection
- 5 position rotating rear handle
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety

UH008GZ Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Set (191R55-5), Blade Cover (412911-1)

Battery Capacities	40V max XGT
Strokes Per Minute (min^{-1}):	2,000 / 3,600 / 5,000 SPM
Cutting Length	24" (60 cm)
Maximum Cutting Thickness	7/8" (21.5 mm)
Overall Length	44" (112 cm)
Net Weight	7.9 lbs (3.6 kg)



18V + 18V 36V

DUH651Z

36V (18Vx2) LXT 25-1/2" Hedge Trimmer w/XPT

Reduced noise and emissions versus competitive gas mode

Dual blade action

- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Battery capacity warning light indicates approximate remaining Battery power
- 5 position rotating rear handle with positive stops at 0º, 45º and 90º enables optimal positioning when cutting vertical or angled hedges
- Variable speed dial enables operator to adjust cutting speed based on materials or application

DUH651Z Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Assembly Set (196689-1), Blade Cover (450490-1)

Battery Capacities	Two 18V LXT
Strokes Per Minute (min^{-1}):	1,000 - 1,800 SPM
Cutting Length	25-1/2" (65 cm)
Maximum Cutting Thickness	11/16" (18 mm)
Overall Length	48-1/2" (123 cm)
Net Weight	8.9 lbs (4.0 kg)



18V LITHIUM-ION BL MOTOR

DUN600LZ

18V LXT 23-5/8" Fixed Head Pole Hedge Trimmer w/XPT

Made for those higher hedges when only straight cutting is desired

- High speed & power to get the task done quickly
- 3 speed settings to vary easily according to the cutting conditions
- Reverse function to help free the blade in case it becomes jammed
- Optimum curved blades with 3 sharpened edges are designed to easily catch and hold twigs
- Curved blades reduce friction to help prevent power loss
- Lightweight design for less operator fatigue
- Electric brake function for added safety

DUN600LZ Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Assembly (191C13-1), Blade Cover (458414-1), Hex Wrench 4 (783202-0)

Battery Capacities	18V LXT
Strokes Per Minute (min^{-1}):	2,000 / 3,600 / 4,400 SPM
Cutting Length	23-5/8" (60 cm)
Overall Length	80-1/2" (205 cm)
Net Weight	7.5 lbs (3.4 kg)



18V LITHIUM-ION BL MOTOR

DUN500WZ

18V LXT 19-3/4" Adjustable Head Pole Hedge Trimmer w/XPT

Made for those higher hedges when multi angle cutting is desired

Cutting head has 6 angle settings plus can be folded flat for transport and storage

- High speed & power to get the task done quickly
- 3 speed settings to vary easily according to the cutting conditions
- Reverse function to help free the blade in case it becomes jammed
- Optimum curved blades with 3 sharpened edges are designed to easily catch and hold twigs
- Curved blades reduce friction to help prevent power loss

DUN500WZ Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Assembly (191C14-9), Blade Cover (458413-3)

Battery Capacities	18V LXT
Strokes Per Minute (min^{-1}):	2,000 / 3,600 / 4,400 SPM
Cutting Length	19-3/4" (50 cm)
Overall Length	83-1/4" (211.5 cm)
Net Weight	8.0 lbs (3.6 kg)



18V LITHIUM-ION BL MOTOR

DUN461WZ / DUN461WSF

18V LXT 18-1/8" Telescopic Pole Hedge Trimmer w/XPT

Telescopic design provides up to 99" of reach

- Tool-less locking lever allows operator to easily adjust extension length with no additional tools
- Hedge trimmer head can be adjusted every 15° to match the application
- Battery guard prevents accidental damage to Battery
- Slide type front grip is easily adjusted for operator comfort for maximum work efficiency in different working postures

DUN461WZ Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Set (191P00-8), Blade Cover (413720-1)

DUN461WSF Also Includes: BL1830B 18V LXT Battery (3.0Ah) (194205-3), Standard Charger (DC18SD)

Battery Capacities	18V LXT
Strokes Per Minute (min^{-1})	3,600 SPM
Cutting Length	18-1/8" (46 cm)
Overall Length	99" (251 cm)
Net Weight	5.8 lbs (2.6 kg)



18V BL MOTOR

DUH751Z / DUH751RTE

18V LXT 30" Hedge Trimmer w/XPT

5 position rotating rear handle with positive stops at 0º, 45º and 90º

Dual action double-sided shear blade for precision cutting

- 3-speed push button control with variable trigger for precise amount of power within each setting
- Anti-vibration design (five cushions within the housing) for operator comfort
- Two stage safety switch system prevents accidental start up

DUH751Z Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Set (191R54-7), Blade Cover (412912-9)

DUH751RTE Also Includes: BL1850B 18V LXT Battery (5.0Ah x2) (196675-2), Rapid Charger (DC18RC)

Battery Capacities	18V LXT
Strokes Per Minute (min^{-1}):	
	0 - 2,000 / 0 - 3,600 / 0 - 4,400 SPM
Cutting Length	29-1/2" (75 cm)
Maximum Cutting Thickness	15/16" (23.5 mm)
Overall Length	49-1/2" (126.1 cm)
Net Weight	8.4 lbs (3.8 kg)



18V BL MOTOR *NEW*

DUH606Z / DUH606RT

18V LXT 24" Hedge Trimmer w/XPT

Excellent combination of smooth and efficient trimming with high maneuverability

Constant speed control, electric brake, anti-restart

- 24" dual action double-sided shear blade provides optimal performance
- Constant speed control maintains constant speed under heavy load
- Constant speed control maintains constant speed under heavy load
- Anti-vibration structure limits operator exposure to vibration

DUH606Z Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade (1910H9-0), Blade Cover (413L92-6)

DUH606RT Also Includes: BL1850B 18V LXT Battery (5.0Ah) (196675-2), Rapid Charger (DC18RC)

Battery Capacities	18V LXT
Strokes Per Minute (min^{-1})	4,000 SPM
Cutting Length	24" (60 cm)
Maximum Cutting Thickness	13/16" (2 cm)
Overall Length	38" (96.5 cm)
Net Weight	5.1 lbs (2.3 kg)



18V BL MOTOR

DUH602Z / DUH602RTE

18V LXT 24" Hedge Trimmer w/XPT

Reduced noise and emissions versus competitive gas models

Dual blade action

- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Battery capacity warning light indicates approximate remaining Battery power
- 5 position rotating rear handle with positive stops at 0º, 45º and 90º enables optimal positioning when cutting vertical or angled hedges

DUH602Z Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Assembly Set (191R57-1), Blade Cover (459121-9)

DUH602RTE Also Includes: BL1850B 18V LXT Battery (5.0Ah x2) (196675-2), Rapid Charger (DC18RC)

Battery Capacities	18V LXT
Strokes Per Minute (min^{-1}):	
	0 - 2,000 / 0 - 3,600 / 0 - 4,400 SPM
Cutting Length	24" (60 cm)
Maximum Cutting Thickness	7/8" (21.5 mm)
Overall Length	43-3/4" (111.3 cm)
Net Weight	7.8 lbs (3.5 kg)



18V *NEW*

DUH607Z

18V LXT 24" Hedge Trimmer w/XPT

Compact and light weight design for smooth and efficient trimming with high maneuverability

- Hedge Trimmer delivers up to 2,700 SPM for efficient cutting
- 24" dual action double-sided shear blade provides optimal performance
- Lightweight aluminum guide bar reduces operator strain and fatigue
- Anti-vibration structure limits exposure to vibration
- Equipped with battery protection circuit to protect against overloading, over-discharging and over-heating
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety

DUH607Z Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade (1911J2-4), Blade Cover (413L92-6)

Battery Capacities	18V LXT
Strokes Per Minute (min^{-1})	2,700 SPM
Cutting Length	24" (60 cm)
Maximum Cutting Thickness	9/16" (15 mm)
Overall Length	38-1/2" (97.6 cm)
Net Weight	5.3 lbs (2.4 kg)



18V

DUH523Z

18V LXT 22" Hedge Trimmer

Designed for maximum versatility and ease of operation

Dual blade action

- Battery Protection system provides over-discharge, temperature and current protection for enhanced performance, Battery cycle life and overall Battery life
- Anti-vibration structure features five cushions linking handle and motor sections for significantly reduced vibration transmission to operator
- Non-electrolyzed nickel plated blades reduce staining and rusting
- Tool-less blade changing system enables simple and easy blade changes

DUH523Z Includes: Tool Only. Batteries and Charger Sold Separately. Blade Cover (453723-3), Shear Blade Complete Set (195846-8)

Battery Capacities	18V LXT
Strokes Per Minute (min^{-1})	1,350 SPM
Cutting Length	22" (56 cm)
Maximum Cutting Thickness	15/32" (12 mm)
Overall Length	38" (96 cm)
Net Weight	6.0 lbs (2.7 kg)



18V *NEW*

DUM111SYX

18V LXT 4" Hedge Trimmer w/Grass Shear Attachment

2-in-1 quick blade change from Hedge Trimmer to Grass Shear

Dual blade action cuts quickly with shearing effect for both hedge trimmer and grass shear

- Tool-less blade changing system enables simple and easy blade changes
- Left and right hand lock off button for operator safety

DUM111SYX Includes: BL1815N 18V LXT Battery (1.5Ah) (196235-0), Standard Charger (DC18SD), Battery Cover (450128-8), Shear Blade Set (191N23-4), Shear Blade Set (191N24-2), Blade Cover (413885-9), Blade Cover (195274-7), Storage Cover (413429-5)

Battery Capacities	18V LXT
No Load Speed	2,500 SPM
Cutting Width	4" (20 cm)
Grass Shear	4-5/16" (11 cm)
Hedge Trimmer	7-7/8" (20 cm)
Depth Adjustment	5/8" / 13/16" / 1"
	(1.5 cm / 2 cm / 2.5 cm)
Overall Length	11-3/4" (300 mm)
Net Weight	3.1 lbs (1.4 kg)



MM4

EN5950SH

25.4cc 4-Stroke 23" Short Shaft Pole Hedge Trimmer

Short shaft style ideal for vertical cutting of tall hedges and shrubs

Complies with CARB Tier 3, EPA Phase 2, EU Stage 2 emissions requirements

- Multi-position engine lubrication system allows Makita 4-Stroke Pole Hedge Trimmers to be operated at any angle for maximum versatility
- Fixed hedge trimmer head ideal for use in vertical cutting applications

EN5950SH Includes: Hedge Trimmer Head Assy (135704-6), Box Driver 10-16 (782233-6), Hex Wrench 4 (783223-2), Starter Rope (444023-2), Spark Plug (168534-0), Oil Set, Accessory Bag (831304-7)

Displacement	25.4cc
Maximum Engine Power	0.77 Kw / 1.1 HP
Cutting Length	23" (59 cm)
Carburetor	Diaphragm Type
Fuel Tank Capacity	0.6 L
Overall Length	70" (178 cm)
Net Weight	13.2 lbs (6.0 kg)



EH6000W

22.2cc 2-Stroke 23" Hedge Trimmer

5 Position adjustable rear handle for vertical or angle trimming

- 23-1/8" cutting length with 3 edge tooth design and high anti-abrasion coated surface for stain free long lasting operation
- Double sided stainless steel blades for extended life, clean trimming and cutting on both sides of blade
- Extended 50 hour long life gear case lubrication system offers minimal service maintenance by circulating grease in the gear housing

EH6000W Includes: Two Shear Blades (725184-0), Blade Cover (454278-1), End Cover Set (196969-5), Box Driver 10-16 (782233-6), Hex Wrench 4 (783223-2), Starter Rope (444028-2), Spark Plug (0650109950)

Displacement	22.2cc
Maximum Engine Power	0.68 kW / 0.91 HP
Cutting Length	23" (59 cm)
Carburetor	Diaphragm Type
Fuel / Oil Mixture	50:1
Fuel Tank Capacity	400 ml
Overall Length	44" (111 cm)
Net Weight	11.0 lbs (5.0 kg)



EH5000W

22.2cc 2-Stroke 19" Hedge Trimmer

5 Position adjustable rear handle for vertical or angle trimming

- 19" cutting length with 3 edge tooth design and high anti-abrasion coated surface for stain free long lasting operation
- Double sided stainless steel blades for extended life, clean trimming and cutting on both sides of blade
- Extended 50 hour long life gear case lubrication system offers minimal service maintenance by circulating grease in the gear housing

EH5000W Includes: Two Shear Blades, Blade Cover (454279-9), End Cover Set (196969-5), Box Driver 10-16 (782233-6), Hex Wrench 4 (783223-2), Starter Rope (444028-2), Spark Plug (0650109950)

Displacement	22.2cc
Maximum Engine Power	0.68 kW / 0.91 HP
Cutting Length	19" (48.3 cm)
Carburetor	Diaphragm Type
Fuel / Oil Mixture	50:1
Fuel Tank Capacity	400 ml
Overall Length	40" (101 cm)
Net Weight	10.5 lbs (4.8 kg)

MATERIAL MOVERS

LXT





18V x 2 = 36V BL MOTOR NEW

DCU602Z

36V (18Vx2) LXT Material Mover w/XL Bucket & Electric Dump

Holds (4) 18V LXT batteries but operates using (2) 18V Batteries at a time

- Electric dump feature with 661 lbs (300 kg) maximum load capacity
- 100-minute runtime and up to 7.2km range using four BL1860B 18V LXT (6.0Ah) batteries

DCU602Z Includes: Tool Only. Batteries and Charger Sold Separately.

Battery Capacities	Two Batteries or Four Batteries in parallel
Maximum Speed:	
Forward	1.5 / 3.5 / 5.0 km/h
Reverse	1.0 km/h
Minimum Turning Radius	
(Outer diameter when turning with front wheel as axis)	45-1/4" (115 cm)
Maximum Climbing Capacity	12°
Maximum Load Capacity:	
On Flat Ground	661.4 lbs (300 kg)
On Slope (3 ° - 12 °)	397 lbs (180 kg)
Overall Dimensions (L x W x H)	58-1/4" x 28-3/4" x 38-1/4" (148 cm x 73 cm x 82 cm)
Net Weight	318.2 lbs (144.3 kg)



18V x 2 = 36V BL MOTOR NEW

DCU601Z

36V (18Vx2) LXT Material Mover w/Flatbed & Electric Lift

Holds (4) 18V LXT batteries but operates using (2) 18V Batteries at a time

- Electric lift feature reduces workload featuring 40-1/4" (102 cm) max lift height and 661 lbs (300 kg) max load capacity
- 100-minute runtime and up to 7.2km range using four BL1860B 18V LXT (6.0Ah) batteries

DCU601Z Includes: Tool Only. Batteries and Charger Sold Separately.

Battery Capacities	Two Batteries or Four Batteries in parallel
Maximum Speed:	
Forward	1.5 / 3.5 / 5.0 km/h
Reverse	1.0 km/h
Minimum Turning Radius	
(Outer diameter when turning with front wheel as axis)	45-1/4" (115 cm)
Maximum Climbing Capacity	12°
Maximum Load Capacity:	
On Flat Ground	661.4 lbs (300 kg)
On Slope (3 ° - 12 °)	397 lbs (180 kg)
Overall Dimensions (L x W x H)	55" x 28-3/4" x 38-1/4" (140 cm x 73 cm x 82 cm)
Net Weight	316 lbs (143.3 kg)



NEW

DCU605Z

36V (18Vx2) LXT Material Mover w/XL Flat Bucket & Drain Cap

Holds (4) 18V LXT batteries but operates using (2) 18V Batteries at a time

- Experience the convenience of a large flat bucket with an expansive heaped capacity of 295L and a generous liquid capacity of 250L
- 100-minute runtime and up to 7.4km range using four BL1860B 18V LXT (6.0Ah) batteries

DCU605Z Includes: Tool Only. Batteries and Charger Sold Separately.

Battery Capacities	Two Batteries or Four Batteries in parallel
Maximum Speed:	
Forward	1.5 / 3.5 / 5.0 km/h
Reverse	1.0 km/h
Minimum Turning Radius	
(Outer diameter when turning with front wheel as axis)	45-1/4" (115 cm)
Maximum Climbing Capacity	12°
Maximum Load Capacity:	
On Flat Ground	661.4 lbs (300 kg)
On Slope (3 ° - 12 °)	396.8 lbs (180 kg)
Overall Dimensions (L x W x H)	56-5/8" x 28-3/4" x 40-1/2" (144 cm x 73 cm x 103 cm)
Net Weight	230.9 lbs (104.7 kg)



NEW

DCU604Z

36V (18Vx2) LXT Material Mover w/XL Flatbed Tray & Manual Dump

Holds (4) 18V LXT batteries but operates using (2) 18V Batteries at a time

- Elevate productivity with a telescopic loading platform boasting a robust 300 kg (661 lbs) max load capacity and easy-to-use dump function
- 100-minute runtime and up to 7.4km range using four BL1860B 18V LXT (6.0Ah) batteries

DCU604Z Includes: Tool Only. Batteries and Charger Sold Separately.

Battery Capacities	Two Batteries or Four Batteries in parallel
Maximum Speed:	
Forward	1.5 / 3.5 / 5.0 km/h
Reverse	1.0 km/h
Minimum Turning Radius	
(Outer diameter when turning with front wheel as axis)	45-1/4" (115 cm)
Maximum Climbing Capacity	12°
Maximum Load Capacity:	
On Flat Ground	661.4 lbs (300 kg)
On Slope (3 ° - 12 °)	396.8 lbs (180 kg)
Overall Dimensions (L x W x H)	63" x 42-1/2" x 40-1/2" (160 cm x 108 cm x 103 cm)
Net Weight	261.7 lbs (118.7 kg)



DCU180ZX2

18V LXT Material Mover w/Bucket & XPT

Holds (2) 18V LXT batteries but operates using (1) 18V LXT Battery at a time

Power-assisted Wheelbarrow is a convenient solution for material transport on job sites

- 2-speed with max. speed up to 2.5 MPH on a 12º incline
- Interchangeable steel tube flat bed or steel bucket (flat bed optional)

DCU180ZX2 Includes: Tool Only. Batteries and Charger Sold Separately. Support Foot (2 Ea. 144675-6), Key (643890-4), Wrench 13 (2 Ea. 781006-4), Bucket (198494-2)

Battery Capacities	One Battery or Two Batteries in parallel
Maximum Speed:	
Forward, High / Low	0 - 3.5 km/h / 0 - 1.5 km/h
Reverse	0 - 1.0 km/h
Minimum Turning Radius	
(Outer diameter when turning with front wheel as axis)	110 cm
Maximum Climbing Capacity	12°
Maximum Load Capacity	287 lbs (130 kg)
Overall Dimensions (L x W x H)	51-1/2" x 31-1/8" x 35-1/2" (131 cm x 79 cm x 90 cm)
Net Weight	86 lbs (39 kg)



DCU180ZX1

18V LXT Material Mover w/Flatbed Tray & XPT

Holds (2) 18V LXT batteries but operates using (1) 18V LXT Battery at a time

Power-assisted Flatbed Tray is a convenient solution for material transport on job sites

- 2-speed with max. speed up to 2.5 MPH on a 12º incline
- Interchangeable steel tube flat bed or steel bucket (steel bucket optional)

DCU180ZX1 Includes: Tool Only. Batteries and Charger Sold Separately. Support Foot (2 Ea. 144675-6), Key (643890-4), Wrench 13 (2 Ea. 781006-4), Flatbed Tray (199116-7)

Battery Capacities	One Battery or Two Batteries in parallel
Maximum Speed:	
Forward, High / Low	0 - 3.5 km/h / 0 - 1.5 km/h
Reverse	0 - 1.0 km/h
Minimum Turning Radius	
(Outer diameter when turning with front wheel as axis)	110 cm
Maximum Climbing Capacity	12°
Maximum Load Capacity	287 lbs (130 kg)
Overall Dimensions (L x W x H)	61-1/2" x 41-3/4" x 35-1/2" (156 cm x 106 cm x 90 cm)
Net Weight	97.5 lbs (44.2 kg)

GRASS SHEARS

LXT/CXT





DUM604Z

18V LXT 6" Grass Shear

Compact design for added versatility

Dual blade action

- Dual blade action cuts quickly with shearing effect
- Grass catcher enables quick and easy depth adjustment
- Tool-less blade changing system enables simple and easy blade changes
- Left and right hand lock off button for operator safety
- Optional Hedge trimmer blade kit for converting tool to use as a precise hedge trimmer

DUM604Z Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Assembly (195267-4), Blade Cover (452055-5), Grass Catcher (457426-1)

Battery Capacities	18V LXT
No Load Speed	2,500 SPM
Cutting Width	6" (16 cm)
Depth Adjustment	5/8" / 13/16" / 1" (1.5 cm / 2 cm / 2.5 cm)
Overall Length	13-7/8" (35.3 cm)
Net Weight	2.5 lbs (1.1 kg)



12V max LITHIUM-ION CXT

UM600DZ

12V max CXT Li-Ion 6" Grass Shear

Compact design for added versatility

Dual blade action

- Dual blade action cuts quickly with shearing effect
- Non-electrolyzed nickel plated blades reduce staining and rusting
- Grass catcher enables quick and easy depth adjustment
- Tool-less blade changing system enables simple and easy blade changes
- Left and right hand lock off button for operator safety
- Optional Hedge Trimmer blade kit: for converting this model into model UH201DZ cordless Hedge Trimmer

UM600DZ Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Assembly (195176-7), Blade Cover (452055-5), Grass Catcher (457426-1)

Battery Capacities	12V max CXT Li-Ion
No Load Speed	2,500 SPM
Cutting Width	6-5/16" (16 cm)
Depth Adjustment	5/8" / 13/16" / 1" (1.5 cm / 2 cm / 2.5 cm)
Overall Length	13-5/8" (34.7 cm)
Net Weight	2.5 lbs (1.1 kg)



12V max LITHIUM-ION

MU01Z

12V max Li-Ion 6" Grass Shear

Compact design for added versatility

Dual blade action

- Dual blade action cuts quickly with shearing effect
- Non-electrolyzed nickel plated blades reduce staining and rusting
- Wire toboggan style base frame enables quick and easy depth adjustment
- Battery capacity warning light indicates low Battery capacity
- Tool-less blade changing system enables simple and easy blade changes

MU01Z Includes: Tool Only. Batteries and Charger Sold Separately. Shear Blade Assembly (195176-7), Base Frame (325896-1), Change Lever (451813-6), Blade Cover (452055-5)

Battery Capacities	12V max (1.3Ah) Li-Ion
No Load Speed	1,250 SPM
Cutting Width	6" (16 cm)
Depth Adjustment	3/8" / 9/16" / 1" (1 cm / 1.5 cm / 2.5 cm)
Overall Length	11-1/2" (29.2 cm)
Net Weight	2.0 lbs (0.9 kg)

BLOWERS

XGT/LXT/CXT/AC/GAS





XGT 40V | 80V max BL MOTOR

UB001GZ / UB001GM101

40V max XGT 565 CFM Blower

Up to 565 CFM at 143 MPH in boost mode

- Variable speed control by dial with cruise control trigger for optimal air volume and velocity with reduced operator strain and fatigue
- Boost mode provides added force for blowing heavy or wet materials
- 3-stage telescopic long nozzle

UB001GZ Includes: Tool Only. Batteries and Charger Sold Separately. Front Nozzle (413367-1), End Nozzle 80 (412758-3), Extension Nozzle (183P97-1), Flat Nozzle (197889-6), Adapter Pipe (191L96-5), Shoulder Harness (166094-6)

UB001GM101 Also Includes: BL4040 40V max XGT Battery (4.0Ah) (BL4040), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
Maximum Air Volume	0 - 565 CFM (0 - 16.0 m³/min)
Maximum Air Velocity	0 - 143 MPH (64.0 m/sec)
No Load Speed:	
Boost Mode	0 - 22,000 RPM
Cruise Control Mode	0 - 20,000 RPM
Overall Length	33-1/2" - 37-1/2" (85 - 95 cm)
Net Weight	5.67 lbs (2.5 kg



18V + 18V 36V BL MOTOR

DUB362Z / DUB362PT2

36V (18Vx2) LXT 473 CFM Blower w/XPT

Amazing 120 MPH and 473 CFM operation

Quiet and powerful blowing operation where noise levels are a concern

- 6-stage air volume / velocity settings by dial with variable speed control by trigger
- The trigger also has a lock on function, with button operable from either side of handle
- 3-stage telescopic long nozzle with adjustment range of 4" (10 cm)

DUB362Z Includes: Tool Only. Batteries and Charger Sold Separately. Front Nozzle (455914-2), Long Nozzle (183R02-0)

DUB362PT2 Also Includes: BL1850B 18V LXT Battery (5.0Ah x2) (196675-2), Dual Port Rapid Charger (DC18RD)

Battery Capacities	Two 18V LXT
Maximum Air Volume	473 CFM (13.4 m³/min)
Maximum Air Velocity	120 MPH (54 m/sec)
No Load Speed	22,000 RPM
Overall Length	32-3/4", 34-3/4", 36-5/8" (83 cm, 88 cm, 93 cm)
Net Weight	6.0 lbs (2.7 kg)



18V + 18V 36V BL MOTOR

DUB363ZV / NEW DUB363PG2V

36V (18Vx2) LXT 473 CFM Blower w/Vacuum Kit & XPT

Our most powerful 3-in-1 handheld Blower

Amazing 120 MPH and 473 CFM operation

Quiet and powerful blowing & vacuuming with mulching operation

- 3-tools-in-1: vacuum, mulcher and blower for convenient clean-up
- Commercial design for heavy duty applications

DUB363ZV Includes: Tool Only. Batteries and Charger Sold Separately. Vacuum Kit (191P37-5), Hex Wrench 4 (783202-0)

DUB363PG2V Also Includes: BL1860B 18V LXT Battery (6.0Ah x2) (197424-0), Dual Port Rapid Charger (DC18RD)

Battery Capacities	Two 18V LXT
Maximum Air Volume	473 CFM (13.4 m³/min)
Maximum Air Velocity	145 MPH (65 m/sec)
No Load Speed:	0 - 7,850 RPM
Overall Length:	
w/Long Nozzle	28-3/4", 31", 33" (73.7 cm, 78.6 cm, 83.6 cm)
w/Vacuum Nozzle	55" (139.6 cm)
Net Weight	11.7 lbs (5.3 kg)



36V (18Vx2)

DUB361Z

36V (18Vx2) LXT 155 CFM Blower w/XPT

More power from Makita's 36V (18Vx2) LXT Battery platform

- Optimal performance in extreme conditions
- Battery capacity warning light indicates ideal time to recharge Battery

DUB361Z Includes: Tool Only. Batteries and Charger Sold Separately. Shoulder Harness (166095-4), Long Nozzle (452123-4)

Battery Capacities	Two 18V LXT
Maximum Air Volume:	
High	155 CFM (4.4 m³/min)
Low	92 CFM (2.6 m³/min)
Maximum Air Velocity:	
High	208 MPH (93 m/sec)
Low	128 MPH (57 m/sec)
No Load Speed:	
High	17,000 RPM
Low	10,000 RPM
Overall Length	35-5/8" (90 cm)
Net Weight	4.2 lbs (1.9 kg)



18V BL MOTOR

DUB184Z / NEW DUB184RT

18V LXT 459 CFM Blower w/XPT

Our most powerful 18V Cordless Blower yet

Amazing 116 MPH and 459 CFM operation

Quiet, lightweight and powerful blowing operation where noise levels are a concern

- Variable speed control by trigger and cruise control lever
- The trigger also has a lock on function, with button operable from either side of handle
- Best grip to frame angle provides optimum nozzle to ground angle for efficient sweeping operation
- Lightweight & compact for single handed operation

DUB184Z Includes: Tool Only. Batteries and Charger Sold Separately. Front Nozzle (459701-1), Hex Wrench 4 (783202-0)

DUB184RT Also Includes: BL1850B 18V LXT Battery (5.0Ah) (196675-2), Rapid Charger (DC18RC)

Battery Capacities	18V LXT
Maximum Air Volume	459 CFM (13 m³/min)
Maximum Air Velocity	116 MPH (52 m/sec)
No Load Speed	0 - 18,000 RPM
Overall Length	32-1/2" (82.5 cm)
Net Weight	4.7 lbs (2.1 kg)



18V

DUB185Z

18V LXT 113 CFM Blower

Variable 3-speed

- Increased max. air volume, air speed and sealed suction for improved performance and efficiency
- High / medium / low speed settings with variable speed trigger allows operator to use the precise amount of air for the application
- Converts quickly and easily to a vacuum using vacuum bag part no. 123241-2
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation
- Use with Long Garden Nozzle 191G09-6 for easy operation while standing

DUB185Z Includes: Tool Only. Batteries and Charger Sold Separately. Nozzle Assembly (123245-4)

Battery Capacities	18V LXT
Maximum Air Volume	113 CFM (3.2 m³/min)
Maximum Air Velocity	219 MPH (98 m/sec)
Maximum Air Pressure	5.8 kpa (5 cm H^2O)
No Load Speed	0 - 18,000 RPM
Overall Length	20-3/8" (51.7 cm)
Net Weight	2.9 lbs (1.3 kg)



12V max CXT

UB100DZ

12V max CXT Li-Ion 92 CFM Blower

Incredible 167 MPH velocity and 92 CFM air volume

Lightweight and compact design for easy handling

- Large air outlet for increased air flow output and velocity
- Variable 3-speed trigger for precise amount of air flow within each setting
- Converts quickly and easily to a vacuum using vacuum bag (123241-2)
- Anti-static element protects the user from an electric shock
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation

UB100DZ Includes: Tool Only. Batteries and Charger Sold Separately. Nozzle Assembly (123245-4)

Battery Capacities	12V max CXT Li-Ion
Maximum Air Volume	92 CFM (2.6 m³/min)
Maximum Air Velocity	168 MPH (75 m/sec)
No Load Speed	0 - 15,800 RPM
Overall Length	19-7/8" (50.5 cm)
Net Weight	2.7 lbs (1.2 kg)



12V max CXT

UB101DZ

12V max CXT Li-Ion 92 CFM Blower w/Long Nozzle

Unique extended nozzle design for optimum operation

Lightweight and compact design for easy handling

- Large air outlet for increased air flow output and velocity
- Variable 3-speed trigger for precise amount of air flow within each setting
- Extended nozzle design directs air flow angle for blowing / sweeping debris on driveways and more
- Anti-static element protects the user from an electric shock

UB101DZ Includes: Tool Only. Batteries and Charger Sold Separately. Garden Nozzle (191G09-6)

Battery Capacities	12V max CXT Li-Ion
Maximum Air Volume	92 CFM (2.6 m³/min)
Maximum Air Velocity	125 MPH (56 m/sec)
No Load Speed	0 - 15,800 RPM
Overall Length	33-1/2" (84.9 cm)
Net Weight	2.8 lbs (1.3 kg)



UB1103

6.8 A Blower

Anti-Static Design

- Double sided impeller and enlarged blower outlet provides increased air volume for maximum performance and efficiency
- Self standing design allows tool to stand upright for use in stationary applications
- Top and rear handle design enables comfortable positioning for optimal jobsite maneuverability
- Converts quickly and easily between blower and vacuum modes
- Variable speed trigger and dial enables operator to adjust blower or suction speed based on the material or application

UB1103 Includes: Nozzle Assembly (123245-4), Dust Bag Assembly (123241-2)

Maximum Air Volume	145 CFM (4.1 m³/min)
Maximum Air Velocity	203 MPH (91 m/sec)
No Load Speed	0 - 16,000 RPM
AMPS (120V)	6.8 A
Overall Length	18 -7/8" (47.9 cm)
Net Weight	4.3 lbs (2.0 kg)



MM4

BHX2500CA

24.5cc 4-Stroke 356 CFM Blower

Air speed 145 MPH, maximum air volume 356 CFM

Improved fuel tank coating is EPA Phase II and CARB III compliant

- Exceeds Government Clean Air Emission Ratings
- 4-Stroke, for low noise and low emission
- Quick-start - low compression engine for easy starting
- Auto decompression for easy starting
- Easy access to spark plug and air filter

BHX2500CA Includes: Long Nozzle (125729-8), Round End Nozzle (455558-8), Tool Kit (194717-6), Starter Rope (444019-3), Spark Plug (0650109950)

Displacement	24.5cc
Maximum Air Flow	145 MPH
Maximum Air Volume (End Of Nozzle)	356 CFM
Carburetor	All Position Diaphragm Type
Fuel / Oil Mixture	Not Required
Power Rating	0.81 kW / 1.1 HP
Tank Capacity	520 ml
Overall Length	13-3/4" (35 cm)
Dry Weight	9.9 lbs (4.5 kg)

PRESSURE WASHER

XGT





XGT 40V | 80V max BL MOTOR NEW

HW001GZ

40V max XGT Pressure Washer

3 operating modes - low 435 psi, medium 798 psi, high 1,233 psi when pumped from a reservoir with maximum output up to 1,668 psi when connected to city water supply

- Water can be pumped from a reservoir with a maximum suction height of 3.2 ft. using the included suction hose & filter

UV001GZ Includes: Tool Only. Batteries and Charger Sold Separately. Hose (1910R1-6), Strainer (1910R2-4), Trigger Gun (197842-2), Cycle Jet Nozzle (197824-4), High Pressure Hose (126766-5), Absorption Connector (122F22-7), Cleaner Pin (197879-9), Vario Spray Lance (1912Y6-7)

Battery Capacities	40V max XGT
Maximum Flow Rate	1.85 GPM
Water Flow Rate:	Mode 3: 1.45 GPM
	Mode 2: 1.11 GPM / Mode 1: 0.79 GPM
Maximum Permissible Pressure	1,668 PSI
Working Pressure:	Mode 3: 1,233 PSI
	Mode 2: 798 PSI / Mode 1: 435 PSI
Maximum Feed Temperature	40 °C (104 °F)
Maximum Suction Height	39-3/8" (1.0 m)
Dimensions (L x W x H)	13-1/2" x 15-1/8" x 20-1/2"
	(34.4 cm x 38.3 cm x 52 cm)
Net Weight	21.2 lbs (9.6 kg)

SPRAYERS

LXT/CXT





18V

DUS158Z / DUS158RF

18V LXT 4.0 Gal. (15.0 L) Backpack Sprayer w/XPT

Maximum cordless spraying maneuverability

- Curved tank design with padded harness and ventilated back pad rests comfortably against operator
- I-shaped double-headed nozzle with adjustable rate of flow for narrow spraying or herbicide nozzle for wide angle spraying

DUS158Z Includes: Tool Only. Batteries and Charger Sold Separately. Backpack Shoulder Harness (PR00000319), Measuring Cup (PR00000317)

DUS158RF Also Includes: BL1830B 18V LXT Battery (3.0Ah) (194205-3), Rapid Charger (DC18RC)

Battery Capacities	18V LXT
Tank Capacity	15 L
Hose Length	1.7 m (67")
Maximum Working Pressure	0.5 Mpa
Spray Wand Length	23-5/8" (0.6 m)
Nozzle Mounting Thread	G 1/4"
Dimensions (L x W x H)	12-1/2" x 9-3/8" x 20-3/8"
	(31.7 cm x 23.7 cm x 51.7 cm)
Net Weight	12.2 lbs (5.5 kg)



18V

DUS108Z

18V LXT 2.6 Gal. (10 L) Backpack Sprayer w/XPT

Maximum cordless spraying maneuverability

- Curved tank design with padded harness and ventilated back pad rests comfortably against operator
- I-shaped double-headed nozzle with adjustable rate of flow for narrow spraying or herbicide nozzle for wide angle spraying
- Large paddle switch with lock-on button for easy continuous spraying

DUS108Z Includes: Tool Only. Batteries and Charger Sold Separately. Backpack Shoulder Harness (PR00000319), Measuring Cup (PR00000317)

Battery Capacities	18V LXT
Tank Capacity	10 L
Hose Length	1.7 m (67")
Maximum Working Pressure	0.5 Mpa
Spray Wand Length	23-5/8" (0.6 m)
Nozzle Mounting Thread	G 1/4"
Dimensions (L x W x H)	12-1/2" x 9-3/8" x 17-1/4"
	(31.7 cm x 23.7 cm x 43.7 cm)
Net Weight	11.5 lbs (5.2 kg)



18V LXT

DUS054Z / DUS054RF

18V LXT 1.3 Gal. (5 L) Sprayer w/XPT

Adjustable rate of flow, telescopic wand, lock-on feature

- Curved tank design rests comfortable against operator when carried over the shoulder
- Telescopic spray wand adjusts between 19" and 27" overall length
- H-shaped double-headed nozzle with adjustable rate of flow for narrow or wide angle spraying

DUS054Z Includes: Tool Only. Batteries and Charger Sold Separately. Strap (PR00000128)

DUS054RF Also Includes: BL1830B 18V LXT Battery (3.0Ah) (194205-3), Rapid Charger (DC18RC)

Battery Capacities	18V LXT
Tank Capacity	5 L
Hose Length	1.7 m (67")
Maximum Working Pressure	0.3 Mpa
Spray Wand Length	19-3/4" - 27-1/2" (0.5 - 0.7 m)
Nozzle Mounting Thread	G 1/4"
Dimensions (L x W x H)	13-1/2" x 7-1/8" x 14-1/2" (34.3 cm x 18.2 cm x 36.8 cm)
Net Weight	6.2 lbs (2.8 kg)



12V max CXT

US053DZ

12V max CXT Li-Ion 1.3 Gal. (5 L) Sprayer w/XPT

Adjustable rate of flow, telescopic wand, lock-on feature

- Curved tank design rests comfortable against operator when carried over the shoulder
- Telescopic spray wand adjusts between 19" and 27" overall length
- H-shaped double-headed nozzle with adjustable rate of flow for narrow or wide angle spraying

US053DZ Includes: Tool Only. Batteries and Charger Sold Separately. Strap (PR00000128)

Battery Capacities	12V max CXT Li-Ion
Tank Capacity	5 L
Hose Length	1.7 m (67")
Maximum Working Pressure	0.3 Mpa
Spray Wand Length	19-3/4" - 27-1/2" (0.5 - 0.7 m)
Nozzle Mounting Thread	G 1/4"
Dimensions (L x W x H)	13-1/2" x 7-1/8" x 13-1/2" (34.3 cm x 18.2 cm x 34.3 cm)
Net Weight	5.1 lbs (2.3 kg)

MIST BLOWER

XGT





XGT 40V | 80V max

NEW

PM001GZ / PM001GL201

40V max XGT 15 L Backpack Mist Blower

Maximum spray distance of 15 m / 49.2 ft and an adjustable dial, making it the perfect choice for a wide range of misting operations

- Boasts a large 15L tank that minimizes the need for frequent refills
- If two batteries are installed and one battery in use has run out of power, the battery system automatically switches to use to the other one

PM001GZ Includes: Tool Only. Batteries and Charger Sold Separately. Nozzle (327C46-2), Flexible Pipe (413M50-8), Swivel Pipe (162B56-4), Shoulder Harness R (162C47-1), Shoulder Harness L (162C46-3), Band B (162B60-3), Diffusion Cover (453506-1), Wrench 13 (781006-4)

PM001GL201 Also Includes: BL4080 40V max XGT Battery (8.0Ah x2) (BL4040), Dual Port Rapid Charger (DC40RB)

Battery Capacities	40V max XGT
No Load Speed	25,000 RPM
Blowing Force	15.0 N
Maximum Air Flow	143 MPH
Maximum Air Volume	505 CFM (14.3 m³/min)
Tank Capacity	15 L
Overall Length	12-5/8" (32 cm)
Net Weight	26.3 lbs (11.9 kg)

EARTH AUGERS

XGT/LXT





XGT 40V | 80V max BL MOTOR

DG001GZ05 / DG001GM105

40V max XGT 1/2" Earth Auger w/XPT & ADT

AC power - Cordless versatility

Variable 2-speed, reversible, soft start

- Includes earth auger handle attachment with bracing bar and bit adapters for use with Makita earth auger drill bits
- Torque limiter stops bit rotation if bit jams for increased operator safety and tool protection

DG001GZ05 Includes: Tool Only. Batteries and Charger Sold Separately. 1/2" Drill Chuck (763250-5), Chuck Key (763251-3), D-Style Front Handle (458431-1), Adapter A (327684-2), Adapter D (327687-6), Earth Auger Handle (191P11-3)

DG001GM105 Also Includes: BL4040 40V max XGT Battery (4.0Ah) (BL4040), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
Drilling Capacities:	
For Sandy Soil	7-7/8" (20 cm)
For Clay Soil	5-7/8" (15 cm)
No Load Speed	0 - 400 / 0 - 1,500 RPM
Overall Length	33-1/4" (84.2 cm)
Net Weight	14.4 lbs (6.5 kg)



NEW

DDA460PTZ1

36V (18Vx2) LXT 1/2" Earth Auger w/XPT & ADT

Experience high performance digging with Makita 36V (18Vx2) Earth Auger for even and consistent holes

- Brushless motor delivers power of a 36 cc gas Earth Auger for drill holes up to 8" wide
- Seamlessly adapts to a powerful angle drill, unlocking dual functionality with a single tool
- Torque limiter stops bit rotation if bit jams for increased operator safety and tool protectio

DDA460PTZ1 Includes: BL1850B 18V LXT Battery (5.0Ah x2) (196675-2), Dual Port Rapid Charger (DC18RD), 1/2" Drill Chuck (763250-5), Chuck Key (763251-3), Straight Side Handle (122A18-8), D-Style Front Handle (458431-1), Hex Wrench 6 (783204-6), Earth Auger Handle (191P11-3), Adapter A (327684-2), Adapter D (327687-6), Tool Bag w/Wheels (831269-3)

Battery Capacities	Two 18V LXT
Drilling Capacities:	
For Sandy Soil	7-7/8" (20 cm)
For Clay Soil	5-7/8" (15 cm)
No Load Speed	0 - 350 / 0 - 1,400 RPM
Overall Length	24-1/4" (538 mm)
Net Weight	11.3 lbs (5.1 kg)

CHAINSAWS

XGT/LXT/AC





UC012GZ

40V max XGT 16" Rear Handle Chainsaw

Power equivalent to a 42cc Gasoline Chainsaw

Captive bar nuts

- Low noise level at only 104 dB(A) with zero emissions for operator comfort and reduced environmental impact
- Automatic chain oiler maintains optimal bar/chain lubrication during operation with no adjustments required
- Chain oil view window enables operator to easily check oil level
- Captive nuts: prevent loss of nut when removing

UC012GZ Includes: Tool Only. Batteries and Charger Sold Separately. 16" Chain (191T92-1), 16" Guide Bar (191T88-2), Chain Cover (419242-9), Spike Bumper (347925-0), Wrench 13-16 (782023-7), Oil Supply (199897-3)

Battery Capacities	40V max XGT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	0.325" / 43G
Chain Speed	0 - 5,020 FPM (0 - 1,530 m/min)
Overall Length	17-1/2" (44.5 cm)
Net Weight	9.9 lbs (4.5 kg)



UC016GZ / UC016GT101

40V max XGT 16" Rear Handle Chainsaw

Power equivalent to a 42cc Gasoline Chainsaw

Tool-less chain tension adjustment

- Low noise level at only 104 dB(A) with zero emissions for operator comfort and reduced environmental impact
- Automatic chain oiler maintains optimal bar/chain lubrication during operation with no adjustments required
- Tool-less bar mounting and chain tension adjustment for quick and easy set up and adjustment on the jobsite

UC016GZ Includes: Tool Only. Batteries and Charger Sold Separately. 16" Chain (191T92-1), 16" Guide Bar (191T88-2), Chain Cover (419242-9), Spike Bumper (347925-0), Wrench 13-16 (782023-7), Oil Supply (199897-3)

UC016GT101 Also Includes: BL4050F 40V max XGT Battery (5.0Ah) (BL4050F), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	0.325" / 43G
Chain Speed	0 - 5,020 FPM (0 - 1,530 m/min)
Overall Length	17-1/2" (44.5 cm)
Net Weight	9.9 lbs (4.5 kg)



UC005GZ / UC005GM101

40V max XGT 16" Top Handle Chainsaw

Fast, variable speed (0-4,880 feet per minute) equivalent to a 32cc Gasoline Chainsaw

Designed with the professional arborist in mind that requires a compact and powerful saw

- Variable speed control by trigger • Electric chain brake
- Kickback brake • Chain oil adjustment
- Captive nut: prevent loss of nut when removing

UC005GZ Includes: Tool Only. Batteries and Charger Sold Separately. 16" Chain (191H03-4), 16" Guide Bar (191G17-7), Chain Cover (419242-9), Spike Bumper (346809-9), Wrench 13-16 (782023-7), Oil Supply (199897-3)

UC005GM101 Also Includes: BL4040 40V max XGT Battery (4.0Ah) (BL4040), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 4,880 FPM (0-1,490 m/min)
Overall Length	10-1/2" (26.6 cm)
Net Weight	7.5 lbs (3.4 kg)



UC015GZ / UC015GT101

40V max XGT 14" Rear Handle Chainsaw

Power equivalent to a 42cc Gasoline Chainsaw

Tool-less chain tension adjustment

- Low noise level at only 104 dB(A) with zero emissions for operator comfort and reduced environmental impact
- Automatic chain oiler maintains optimal bar/chain lubrication during operation with no adjustments required
- Tool-less chain tension adjustment for quick and easy adjustment on the jobsite

UC015GZ Includes: Tool Only. Batteries and Charger Sold Separately. 14" Chain (191T91-3), 14" Guide Bar (191T87-4), Chain Cover (419288-5), Spike Bumper (347925-0), Wrench 13-16 (782023-7), Oil Supply (199897-3)

UC015GT101Also Includes: BL4050F 40V max XGT Battery (5.0Ah) (BL4050F), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
Guide Bar Length	14" (35 cm)
Chain Pitch / Gauge	0.325" / 43G
Chain Speed	0 - 5,020 FPM (0 - 1,530 m/min)
Overall Length	17-1/2" (44.5 cm)
Net Weight	9.9 lbs (4.5 kg)



XGT 40V | 80V max BL MOTOR

UC004GZ / UC004GM101

40V max XGT 14" Top Handle Chainsaw

Fast, variable speed (0-4,880 feet per minute) equivalent to a 32cc Gasoline Chainsaw

Designed with the professional arborist in mind that requires a compact and powerful saw

- Variable speed control by trigger • Electric chain brake
- Kickback brake • Chain oil adjustment
- Captive nut: prevent loss of nut when removing

UC004GZ Includes: Tool Only. Batteries and Charger Sold Separately. 14" Guide Bar (191H02-6), 14" Chain (191G16-9), Chain Cover (419288-5), Spike Bumper (346809-9), Wrench 13-16 (782023-7), Oil Supply (182229-1)

UC004GM101 Also Includes: BL4040 40V max XGT Battery (4.0Ah) (BL4040), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
Guide Bar Length	14" (35 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 4,880 FPM (0-1,490 m/min)
Overall Length	10-1/2" (26.6 cm)
Net Weight	7.5 lbs (3.4 kg)



XGT 40V | 80V max BL MOTOR

UC003GZ / UC003GM101

40V max XGT 12" Top Handle Chainsaw

Fast, variable speed (0-4,880 feet per minute) equivalent to a 32cc Gasoline Chainsaw

Designed with the professional arborist in mind that requires a compact and powerful saw

- Variable speed control by trigger • Electric chain brake
- Kickback brake • Chain oil adjustment
- Captive nut: prevent loss of nut when removing

UC003GZ Includes: Tool Only. Batteries and Charger Sold Separately. 12" Chain (191H01-8), 12" Guide Bar (191G15-1), Chain Cover (419288-5), Spike Bumper (346809-9), Wrench 13-16 (782023-7), Oil Supply (199897-3)

UC003GM101 Also Includes: BL4040 40V max XGT Battery (4.0Ah) (BL4040), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
Guide Bar Length	12" (30 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 4,880 FPM (0-1,490 m/min)
Overall Length	10-1/2" (26.6 cm)
Net Weight	7.5 lbs (3.4 kg)



18V + 18V 36V BL MOTOR

DUC400Z / *NEW* DUC400PT2

36V (18Vx2) LXT 16" Rear Handle Chainsaw w/XPT

Fast, variable speed (3,940 feet per minute) equivalent to a 30cc Gasoline Chainsaw

- Variable speed trigger switch (0 - 3,940 FPM) operates the same as a Gasoline Chainsaw
- Built-in LED on / off switch with auto power-off function; for extended Battery life
- Front hand guard chain brake for operator safety in case of accidental kickback
- Tool-less chain tension adjustment for quick and easy adjustment on the jobsite

DUC400Z Includes: Tool Only. Batteries and Charger Sold Separately. 16" Chain (191H03-4), 16" Guide Bar (191H03-4), Chain Cover (419242-9), Oil Supply (182229-1), Spike Bumper (347078-5)

DUC400PT2 Also Includes: BL1850B 18V LXT Battery (5.0Ah x2) (196675-2), Dual Port Rapid Charger (DC18RD)

Battery Capacities	Two 18V LXT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0-3,940 FPM (0-1 200 m/min)
Overall Length	32-1/4" (81.8 cm)
Net Weight	9.3 lbs (4.2 kg)



18V + 18V 36V BL MOTOR

DUC405Z

36V (18Vx2) LXT 16" Rear Handle Chainsaw w/XPT

Fast, variable speed (3,940 feet per minute) equivalent to a 30cc Gasoline Chainsaw

- Variable speed trigger switch (0 - 3,940 FPM) operates the same as a Gasoline Chainsaw
- Built-in LED on / off switch with auto power-off function; for extended Battery life
- Front hand guard chain brake for operator safety in case of accidental kickback
- Low noise level at only 87.7 dB(A) and zero emissions for operator comfort
- Captive nuts: prevent loss of nut when removing

DUC405Z Includes: Tool Only. Batteries and Charger Sold Separately. 16" Chain (191H03-4), 16" Guide Bar (191G17-7), Chain Cover (419242-9), Spike Bumper (347078-5), Box Wrench (782027-9), Oil Supply (182229-1)

Battery Capacities	Two 18V LXT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0-3,940 FPM (0-1 200 m/min)
Overall Length	31-1/2" (80 cm)
Net Weight	9.0 lbs (4.1 kg)



18V + 18V 36V BL MOTOR

DUC355Z

36V (18Vx2) LXT 14" Rear Handle Chainsaw w/XPT

Fast, variable speed (3,940 feet per minute) equivalent to a 30cc Gasoline Chainsaw

- Variable speed trigger switch (0 - 3,940 FPM) operates the same as a Gasoline Chainsaw
- Built-in LED on / off switch with auto power-off function; for extended Battery life
- Front hand guard chain brake for operator safety in case of accidental kickback
- Low noise level at only 87.7 dB(A) and zero emissions for operator comfort
- Captive nuts: prevent loss of nut when removing

DUC355Z Includes: Tool Only. Batteries and Charger Sold Separately. 14" Chain (191H02-6), 14" Guide Bar (191G16-9), Chain Cover (419288-5), Spike Bumper (347078-5), Box Wrench (782027-9), Oil Supply (182229-1)

Battery Capacities	Two 18V LXT
Guide Bar Length	14" (35 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0-3,940 FPM (0-1 200 m/min)
Overall Length	30" (76.2 cm)
Net Weight	8.9 lbs (4.0 kg)



18V + 18V 36V BL MOTOR

DUC356Z

36V (18Vx2) LXT 14" Top Handle Chainsaw w/XPT

Fast, variable speed (3,940 feet per minute) equivalent to a 30cc Gasoline Chainsaw

Designed with the professional arborist in mind that requires an even more powerful saw

- Torque boost mode powers through thick or hard branches
- Variable speed control by trigger
- Soft start for motor protection • Electric chain brake
- Kickback brake • Chain oil adjustment
- Captive nut: prevent loss of nut when removing

DUC356Z Includes: Tool Only. Batteries and Charger Sold Separately. 14" Chain (191H02-6), 14" Guide Bar (191G16-9), Chain Cover (419288-5), Spike Bumper (346809-9), Wrench 13-16 (782023-7), Oil Supply (182229-1)

Battery Capacities	Two 18V LXT
Guide Bar Length	14" (35 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 3,940 FPM (0-1 200 m/min)
Overall Length	24-1/8" (61.2 cm)
Net Weight	8.2 lbs (3.7 kg)



36V (18V x2) BL MOTOR

DUC306Z

36V (18Vx2) LXT 12" Top Handle Chainsaw w/XPT

Fast, variable speed (3,940 feet per minute) equivalent to a 30cc Gasoline Chainsaw

Designed with the professional arborist in mind that requires an even more powerful saw

- Torque boost mode powers through thick or hard branches
- Variable speed control by trigger
- Soft start for motor protection • Electric chain brake
- Kickback brake • Chain oil adjustment
- Captive nut: prevent loss of nut when removing

DUC306Z Includes: Tool Only. Batteries and Charger Sold Separately. 12" Chain (191G15-1), 12" Guide Bar (191H01-8), Chain Cover (419288-5), Spike Bumper (346809-9), Wrench 13-16 (782023-7), Oil Supply (182229-1)

Battery Capacities	Two 18V LXT
Guide Bar Length	12" (30 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 3,940 FPM (0-1 200 m/min)
Overall Length	21-7/8" (55.6 cm)
Net Weight	8.0 lbs (3.6 kg)



18V BL MOTOR

DUC407ZX2 / DUC407RTX2

18V LXT 16" Rear Handle Chainsaw w/XPT

Power and performance equivalent to engine chainsaws with cordless freedom and maneuverability

Electric brake

- Automatic chain oiler maintains optimal bar/chain lubrication during operation with no adjustments required
- Chain oil view window enables operator to easily check oil level
- Tool-less chain tension adjustment for quick and easy adjustment on the jobsite

DUC407ZX2 Includes: Tool Only. Batteries and Charger Sold Separately. 16" Chain (191H03-4), 16" Guide Bar (191G17-7), Chain Cover (413G21-9), Oil Supply (199897-3)

DUC407RTX2 Also Includes: BL1850B 18V LXT Battery (5.0Ah) (196675-2), Rapid Charger (DC18RC)

Battery Capacities	18V LXT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 1,520 FPM (0 - 460 m/min)
Overall Length	31-1/4" (79.4 cm)
Net Weight	8.0 lbs (3.6 kg)



18V BL MOTOR

DUC307ZX2 / DUC307RTX2

18V LXT 12" Rear Handle Chainsaw w/XPT

Power and performance equivalent to engine chainsaws with cordless freedom and maneuverability

Electric brake

- Automatic chain oiler maintains optimal bar/chain lubrication during operation with no adjustments required
- Chain oil view window enables operator to easily check oil level
- Tool-less chain tension adjustment for quick and easy adjustment on the jobsite

DUC307ZX2 Includes: Tool Only. Batteries and Charger Sold Separately. 12" Chain (191H01-8), 12" Guide Bar (191G15-1), Chain Cover (413G23-5), Oil Supply (199897-3)

DUC307RTX2 Also Includes: BL1850B 18V LXT Battery (5.0Ah) (196675-2), Rapid Charger (DC18RC)

Battery Capacities	18V LXT
Guide Bar Length	12" (30 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 1,520 FPM (0 - 460 m/min)
Overall Length	21-7/8" (55.6 cm)
Net Weight	8.0 lbs (3.6 kg)



18V BL MOTOR

DUC254Z

18V LXT 10" Top Handle Chainsaw w/XPT

Fast, variable speed (0-4,270 feet per minute) equivalent to a 22cc Gasoline Chainsaw

Designed with the professional arborist in mind

- Variable speed control by trigger
- Soft start for motor protection • Electric chain brake
- Kickback brake • Chain oil adjustment
- Oil capacity display window • Compact & lightweight
- Captive nut: prevent loss of nut when removing

DUC254Z Includes: Tool Only. Batteries and Charger Sold Separately. 10" Chain (191H00-0), 10" Guide Bar (161846-0), Chain Cover (458501-6), Wrench 13-16 (782023-7), Oil Supply (195093-1), Accessory Bag (831304-7)

Battery Capacities	18V LXT
Guide Bar Length	10" (25 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	4,880 FPM (1,490 m/min)
Overall Length	19" (48.2 cm)
Net Weight	5.8 lbs (2.6 kg)



UC4051A

14.5 A / 16" Electric Chainsaw

Soft start, electronic current limiter, electric brake

- Soft start feature gradually increases speed to eliminate start up shock
- Electronic current limiter prevents motor burnout due to overloading
- Electric brake for increased operator safety
- Automatic chain oiler maintains constant oil delivery regardless of temperature or oil viscosity
- Tool-less chain tension adjustment for quick and easy adjustment on the jobsite

UC4051A Includes: 16" Chain (191H12-3), 16" Guide Bar (191G25-8), Chain Cover (419242-9), Hook Complete (158024-1), Spike Bumper (345651-5)

Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	3/8" / .050"
Chain Speed	2,900 FPM
Oil Tank	200 ml
AMPS (120V)	14.5 A
Overall Length	19-7/8" (50.5 cm)
Net Weight	12.3 lbs (5.6 kg)



18V BL MOTOR

NEW

DUC150Z / DUC150M001

18V LXT 6" Pruning Saw w/XPT

Tool-less change and tension adjustment of saw chain

- Movable guard-covers the top of the guide bar and the guard opens as the branch is cut for added protection and convenience.
- Adjustable automatic chain oiling to ensure optimal lubrication for application
- Rear hand guard for additional safety
- Pruning Saw Holster available (1911R0-4)

DUC150Z Includes: Tool Only. Batteries and Charger Sold Separately. 6" Chain (1912E8-3), 6" Guide Bar (1912F1-4), Chain Cover (413T67-3), Oil Supply (199897-3), File Holder Set 5/32"

DUC150M001 Also Includes: BL1840B 18V LXT Battery (4.0Ah) (196401-9), Standard Charger (DC18WC)

Battery Capacities	18V LXT
Guide Bar Length	6" (15 cm)
Chain Pitch / Gauge	0.325" / 0.043"
Chain Speed	1,570 FPM (480 m/min)
Overall Length	16" (40.8 cm)
Net Weight	2.9 lbs (1.3 kg)

POLE CHAINSAWS

XGT/LXT



12V max CXT LITHIUM-ION | CXT | BL MOTOR

NEW

UC100DZ / UC100DWM

12V max CXT Li-Ion 4" Pruning Saw w/XPT

Cut up to 73 pcs of 50 mm cedar rod using a Makita CXT 2.0Ah Battery

- Tool-less change and tension adjustment of saw chain
- Movable guard-covers the top of the guide bar and the guard opens as the branch is cut for added protection and convenience.
- Adjustable automatic chain oiling to ensure optimal lubrication for application
- Pruning Saw Holster available (1911R0-4)

UC100DZ Includes: Tool Only. Batteries and Charger Sold Separately. 4" Chain (1910V6-4), 4" Guide Bar (1910W0-3), Chain Cover (413M40-1), Chain Edger (198457-8), Oil Supply (199897-3)

UC100DWM Also Includes: BL1041B 12V max Li-Ion Battery (4.0Ah) (197416-9), Standard Charger (DC10WD)

Battery Capacities	12V max CXT Li-Ion
Guide Bar Length	4" (10 cm)
Chain Pitch / Gauge	0.325" / 0.043"
Chain Speed	0 - 1,570 FPM (0-480 m/min)
Overall Length	13-3/4" (35 cm)
Net Weight	2.7 lbs (1.2 kg)



XGT 40V | 80V max | BL MOTOR

UA002GZ / UA002GM101

40V max XGT 9' – 13' Telescoping 10" Pole Chainsaw w/XPT & AFT

Excellent tool balance featuring lightweight cutting head for easy control and maneuverability

Telescoping functionality allows reach of 9' to 13'

- Can reach up to 13'
- Slim saw head allows accessibility in tight areas
- Captive bar nut prevents loss when removing sprocket cover for replacement of saw chain or guide bar

UA002GZ Includes: Tool Only. Batteries and Charger Sold Separately. 10" Chain (199075-5), 10" Guide Bar (161846-0), Guide Bar Case (458501-6), Shoulder Harness (191K37-5), Oil Supply (182229-1), Wrench 13-16 (782023-7), Hex Wrench 4 (783202-0)

UA002GM101 Also Includes: BL4040 40V max XGT Battery (4.0Ah) (BL4040), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
Chain Pitch / Gauge	3/8" / .0043"
Cutting Length	9-1/2" (24 cm)
Oil Tank Capacity	160 ml
Overall Length	99" (251.6 cm)
Net Weight	17.7 lbs (8.0 kg)



XGT 40V | 80V max | BL MOTOR

UA001GZ / UA001GM101

40V max XGT 8' / 10" Pole Chainsaw w/XPT & AFT

Excellent tool balance featuring lightweight cutting head for easy control and maneuverability

- Slim saw head allows accessibility in tight areas
- Integrated branch hook provides support for cutting or clearing branches
- Captive bar nut prevents loss when removing sprocket cover for replacement of saw chain or guide bar

UA001GZ Includes: Tool Only. Batteries and Charger Sold Separately. 10" Chain (199075-5), 10" Guide Bar (161846-0), Guide Bar Case (458501-6), Shoulder Harness (191K37-5), Oil Supply (182229-1), Wrench 13-16 (782023-7)

UA001GM101 Also Includes: BL4040 40V max XGT Battery (4.0Ah) (BL4040), Rapid Charger (DC40RA)

Battery Capacities	40V max XGT
Chain Pitch / Gauge	3/8" / .0043"
Cutting Length	9-1/2" (24 cm)
Oil Tank Capacity	160 ml
Overall Length	88" (223.8 cm)
Net Weight	11.7 lbs (5.3 kg)



18V + 18V 36V | BL MOTOR

DUA251Z

36V (18Vx2) LXT 9' – 13' Telescoping 10" Pole Chainsaw w/XPT & AFT

Excellent tool balance featuring lightweight cutting head for easy control and maneuverability

Telescopic pole extends your reach from 9' to 13'

- Torque boost mode delivers extra power to get through a tough cut
- Battery guard protects batteries from shocks, (e.g. fall damage, bumps, etc.) and acts as a secondary handle
- Integrated branch hook provides support for cutting or clearing branches
- Captive bar nut prevents loss when removing sprocket cover for replacement of saw chain or guide bar

DUA251Z Includes: Tool Only. Batteries and Charger Sold Separately. 10" Chain (199075-5), 10" Guide Bar (161846-0), Guide Bar Case (458501-6), Shoulder Harness (191K37-5), Oil Supply (182229-1), Wrench 13-16 (782023-7)

Battery Capacities	Two 18V LXT
Chain Pitch / Gauge	3/8" / 0.043"
Cutting Length	10" (25.5 cm)
Oil Tank Capacity	160 ml
Overall Length	88" (223.8 cm)
Net Weight	15.7 lbs (7.1 kg)



18V + 18V 36V | BL MOTOR

DUA250Z

36V (18Vx2) LXT 8' / 10" Pole Chainsaw w/XPT & AFT

Excellent tool balance featuring lightweight cutting head for easy control and maneuverability

- Torque boost mode delivers extra power to get through a tough cut
- Battery guard protects batteries from shocks, (e.g. fall damage, bumps, etc.) and acts as a secondary handle
- Integrated branch hook provides support for cutting or clearing branches
- Captive bar nut prevents loss when removing sprocket cover for replacement of saw chain or guide bar

DUA250Z Includes: Tool Only. Batteries and Charger Sold Separately. 10" Chain (199075-5), 10" Guide Bar (161846-0), Guide Bar Case (458501-6), Shoulder Harness (191K37-5), Oil Supply (182229-1), Wrench 13-16 (782023-7)

Battery Capacities	Two 18V LXT
Chain Pitch / Gauge	3/8" / 0.043"
Cutting Length	10" (25.5 cm)
Oil Tank Capacity	160 ml
Overall Length	88" (223.8 cm)
Net Weight	12.2 lbs (5.5 kg)

SPLIT SHAFT UNIT & ATTACHMENTS TOOL BAG - 195638-5



Split Shaft Power Unit sold separately



Specifically designed for Split Shaft Power Units and attachments

- Weather resistant durable nylon cordura construction
- External pockets for storage of accessories and more
- Dual and single inside pockets for maximum storage versatility
- Internal straps retain tool and accessories during transit
- Approximately 48" x 14" x 12" (120 cm x 35 cm x 12 cm)

BRUSH CUTTER & CLEARING BLADES

					Tool Model No.	EBH253U	EBH341U
					CC	24.5	33.5
					Arbor Size	1"	1"
Blade Model No.		Description	Diameter	Arbor Size	Teeth		
	B-14118	4-Point Blades	9"	1"	4 T	•	•
	385 224 140		10"	20 mm			
	B-14124			1"			•
	195298-3	3-Point Blade	9"	1"	3 T	•	•
	385 224 200	Eddy Blades	10"	20 mm	8 T		
	B-14168	Saw Blade	10"	1"	80 T		•

MAKITA TRIMMER LINE

Premium Co-Polymer Nylon
High Flexibility & Wear Resistant



Round T-03355



Ultra T-03595

Style	Diameter	Colour	Loop	1/2 Pound	1 Pound	3 Pound
 Round	0.065"		T-03327	T-03333	-	-
	0.080"		T-03349	T-03355	T-03361	-
	0.095"		T-03383	T-03399	T-03408	T-03414
	0.105"		-	T-03436	T-03442	T-03458
 Ultra	0.065"		T-03539	T-03545	-	-
	0.080"		T-03551	T-03567	T-03573	-
	0.095"		T-03589	T-03595	T-03604	T-03610
	0.105"		-	T-03626	T-03632	T-03648

LINE TRIMMER HEADS

Feed System	Spindle Direction	DUR181 LH	DUR187 LH	DUR189 RH	DUR365U LH	DUR368A LH	DUR368L LH	DUR369N LH	UR201C LH	UR002 LH	UR003 LH	UR008 LH	Part No.
 Bump Feed	M8x1.25 LH		•										198385-7
	-	•											195858-1
	M10x1.25 LH				•	•	•	•					197296-3
									•				198892-0
													195149-0
				•									191D89-4
	M8x1.25 RH												198972-2
	-									•	•		197286-3
	-											•	191R00-0

PROFESSIONAL LINE TRIMMER HEADS

Model	Description	Line Diameter	Line Trimmer Type	Trimmer Spindle Direction	Part No.
	Medium Swift Load Line Trimmer Head	0.080" - 0.105"	Curved Shaft	RH	T-03187
	Medium Swift Load Line Trimmer Head	0.080" - 0.105"	Straight Shaft	LH	T-03676
	Universal Swift Load Pro Line Trimmer Head	0.095" - 0.130"	Straight Shaft	Universal	T-03660
	Universal Quick Load Line Trimmer Head	0.080" - 0.130"	Straight or Curved Shaft	Universal	T-03682



BRUSH CUTTER & LINE TRIMMER SHOULDER STRAPS & HARNESSES

Description	For Model No.	Part No.
Shoulder Strap	DUR187LZ, DUR188LZ, DUR189Z, DUR364LZ, DUR365UZ, DUR368AZ, DUR368LZ, DUX60Z, EBH253L, EBH341L, EM2600L, ER2550LH, ER2600L, EX2650LH, UR100DZX	125516-5
Shoulder Harness	EBH253U, EBH341U	122906-3
	Fits All Makita Cordless & Gas Powered Line Trimmers and Brush Cutters	196129-9
	EM2650UH	123143-2

LUBRICATING MAINTENANCE GREASE

Model	Type	For Models	Contents	Part No.
	N 00	EBH253L, EBH253U, EBH341L, EBH341U, EM2600L, EM400MP EM401MP, ER2550LH ER2600L, ER400MP	80 g	199450-5
	SG 2	EN401MP, EN420MP EN4950H, EN5950SH	80 g	197439-7

4-STROKE ENGINE MAINTENANCE KITS

Model	For Engine No.	For Models	Contents	Part No.
	EH025 EH035	EBH253L, EBH253U EBH341L, EBH341U ER2550LH	Air Filter x2 Fuel Filter Spark Plug	197678-9
	EH026	EN4950H EN5950SH EX2650LH, EY2650H25H	Air Filter x 2 Fuel Filter Spark Plug	197680-2

HEDGE TRIMMER ACCESSORIES



Model	For Models	Blade Cover Part No.	Chip Receiver Part No.
	UH201DZ	195274-7	198402-3
	DUH651Z, UH5570 UH6570	450490-1	194681-1
	EN7350SH	451868-1	451866-5
	EH6000W	452327-8	-
	EN401MP, EN4950H	452328-6	-
	DUH523Z	453723-3	195050-9
	EH7500W	454277-3	-
	EN5950SH	454278-1	-
	EH5000W, EN410MP EN4951SH	454279-9	-
	EN420MP	457036-4	-



CORDLESS BLOWER GUTTER NOZZLE KIT - 191B03-8

- Use with Makita cordless blowers to easily reach and clean gutters or eavestrough of leaves and debris
- Up to 13' (4 m) maximum reach
- Includes: Extension Pipes (3), Nozzle Adapter (1), Rotatable Pipe (1), Metal Bands (2)
- Model DUB184 - Use with Adapter Pipe 191L13-5
- Model DUB362 or DUB363 - Use with Adapter Pipe 191J13-3
- Model UB400MP - Use with Adapter Pipe 191C15-7

CORDLESS GRASS SHEAR ACCESSORIES

Model	Description	For Model No. DUM604Z UM600DZ	For Model No. DUM168Z MU01Z
	Hedge Trimmer Blade	0.365 in	195178-3
	Chip Receiver	198402-3	195278-9
	Blade Cover	195274-7	
	Extension Handle	198486-1	

CORDLESS BLOWER ACCESSORIES

Model	Description	For Model No.	Part No.
	Original Long Blower Nozzle	DUB362	455915-0
	11" Extension Nozzle	DUB362	197888-8
	11" Flat Nozzle	DUB362	197889-6
	Original Long Blower Nozzle	DUB361	452123-4
	21" Long Curved Nozzle	DUB182 DUB183	TP00000199
	Extension Adapter Required for DUB184 to accept 11" Flat Nozzle or 11" Extension Nozzle	DUB184	191L13-5

18V LXT POWER-ASSISTED WHEELBARROW ACCESSORIES

For use with Makita Power-Assisted Wheelbarrow model DCU180Z



Flatbed Tray - 199116-7

- Easy four bolt installation and removal
- Side rails install in up or down position; large knob for easy adjustment
- Ideal for loading heavy duty bulky material such as bricks, concrete bags and more



Steel Bucket - 198494-2

- Easy four bolt installation and removal
- Heavy duty steel based bucket for tough workloads
- Ideal for transporting material on job sites

36V (18Vx2) LXT POWER-ASSISTED WHEELBARROW ACCESSORIES

For use with Makita Power-Assisted Wheelbarrow models DCU604Z & DCU605Z



NEW X-Large Flatbed Tray - 191B67-2

- Tube frame carrier with total load capacity of 300 kg (661 lbs)
- Variable-size loading platform with easy adjustment
- Ideal for flat loads including container boxes, logs, bagged material, etc.
- Steel frame carrier for long lasting performance



NEW X-Large Dump Bucket Set - 191B69-8

- Increase productivity with load capacity of 300 kg (661 lbs), heaped capacity of 200 L and full liquid capacity of 100 L
- Designed for increased efficiency in unloading with 90° swivel range when combined with dump base (191B63-0)
- Corrosion-resistant plastic bucket accepts wet loads
- Bucket shape designed for easy dumping of viscous loads such as mud, clay, etc.



NEW X-Large Flat Bucket Set - 1911B3-6

- Increase productivity with large capacity flat bucket with a heaped capacity of 295 L and full liquid capacity of 250 L
- Equipped with a capped nozzle for hassle free liquid drainage
- Corrosion-resistant plastic bucket accepts wet loads
- No screw on the inside allowing smooth unloading operation



NEW Dump Unit Set - 191B63-0

- Dump unit designed for increased efficiency in unloading with swivel range of up to 90°
- Works in combination with 191B67-2 to add dumping functionality to a Wheelbarrow

BLOWER ACCESSORIES FOR BHX2500CA

Model	Description	For Model No.	Part No.
	Straight Pipe #1	BHX2500CA	455462-1
	Pipe #3		454241-4
	Round End Pipe		450966-8
	Curved End Pipe		451753-8
	Elbow		453720-9
	Vacuum Assembly		197234-5
	Dust Bag		166139-0
	Tool Kit		194717-6

BLOWER ACCESSORIES FOR EB7660TH / EB5300TH

Model	Description	For Model No.	Part No.
	Long Pipe	EB7660TH EB5300TH	197723-0
	Short Pipe		196912-4
	End Nozzle		454896-5
	End Nozzle		455128-3
	Flat Nozzle		196911-6

BLOWER SHOULDER STRAPS & HARNESSES

Model	Description	For Model No.	Part No.
	Shoulder Strap	DUB361Z	166095-4
		DUB362Z	166094-6
	Shoulder Harness (Right)	EB5300TH	162506-7
		EB7650TH	161535-7
		EB7660TH	162502-5
		PM7650H	161510-3
	Shoulder Harness (Left)	EB5300TH	162505-9
		EB7650TH	166125-1
		EB7660TH	162501-7
		PM7650H	161509-8



EARTH AUGER HANDLE SET - 191P11-3

Model	Description
	• Extension handle for use with 1/2" Angle Drills (DG001G, DA001G & DDA460) to power Auger Drills • Auxiliary handle provides better torque control and enhanced maneuverability for easier drilling • Side bar assists with distributing reaction force while drilling larger holes • Securely attaches to tool with included attachments

EARTH AUGER DRILL BITS

Model	Type	Diameter	Replacement Blade Part No.	Replacement Retention Pin Part No.	7/16" Hex Shank Auger Bit Adapters	21-1/4" Extension Bar Part No.	Auger Handle Attachment Part No.	For Model(s)	Auger Part No.
	Earth Auger Drill Bits	4"	E-07668	E-07381	327687-6 (Makita Bit Adapter) 327684-2 (Stihl† Bit Adapter)	E-07375	191P11-3	DG001G DA001G DDA460	E-07347*
		6"	E-07674						E-07353*
		8"	E-07680						E-07369*
	Ice Auger Drill Bit	6"	E-12784	E-07381	N/A	E-07375	191P11-3		E-12778*

*Includes Retention Pin / †Stihl is a registered trademark of Andreas Stihl AG & Co. KG





CHAINSAW AND POLE SAW CHAIN / BAR REFERENCE CHART

Models	Bar Length	Gauge	Pitch	Chain Part No.	Chain Type	Bar Mount	Drive Link	Bar Part No.	Cover Part No.	File Size
CORDLESS / ELECTRIC CHAINSAWS										
DUC122	4-1/2" / 11.5 cm	0.050"	1/4"	191G95-7	25AP	N/A	42	158476-6	416311-7	5/32"
DUC254	10" / 25 cm	0.043"	3/8"	191H00-0	90PX	A041	39	191G14-3	452093-7	4.5 mm
DUC307	12" / 30 cm	0.043"	3/8"	191H01-8	90PX	A041	46	191G15-1	413G23-5	N/A
DUC407	16" / 40 cm	0.043"	3/8"	191H03-4	90PX	A041	56	191G17-7	413G21-9	N/A
DUC302, DUC306 DUC355, DUC405 DUC353, DUC400	12" / 30 cm	0.043"	3/8"	191H01-8	90PX	A041	46	191G15-1	419288-5	4.5 mm
DUC353, DUC355 DUC356, DUC400 DUC405	14" / 35 cm	0.043"	3/8"	191H02-6	90PX	A041	52	191G16-9	419288-5	4.5 mm
DUC353, DUC355 DUC400, DUC405	16" / 40 cm	0.043"	3/8"	191H03-4	90PX	A041	56	191G17-7	419242-9	4.5 mm
UC003	12" / 30 cm	0.043"	3/8"	191H01-8	90PX	A041	46	191G15-1	419288-5	4.5 mm
UC004	14" / 35 cm	0.043"	3/8"	191H02-6	90PX	A041	52	191G16-9	419288-5	4.5 mm
UC005	16" / 40 cm	0.043"	3/8"	191H03-4	90PX	A041	56	191G17-7	419242-9	4.5 mm
UC015	14" / 35 cm	0.043"	0.325"	191T91-3	80TXL	A041	59	191T87-4	419288-5	5/32"
UC012, UC016	16" / 40 cm	0.043"	0.325"	191T92-1	80TXL	A041	64	191T88-2	419242-9	5/32"
UC3530A, UC3551A	14" / 35 cm	0.050"	3/8"	191H11-5	91PX	A041	52	191G24-0	419288-5	5/32"
UC4030A, UC4051A	16" / 40 cm	0.050"	3/8"	191H12-3	91PX	A041	56	191G25-8	419242-9	5/32"
SPECIALTY CHAINSAWS										
EY2650H25H	10" / 25 cm	0.050"	3/8"	191H20-4	91PX	A218	39	191G11-9	452093-7	5/32"
EY401MP	10" / 25 cm	0.050"	3/8"	191H20-4	91PX	A218	39	191G11-9	452093-7	5/32"



CHAINSAW SAFETY EQUIPMENT



Forestry Safety Helmet - T-01703

- Complete head, face and hearing protection for forestry use
- Class C, E & G head protection
- Helmet - meets CE 0086 EN397:1995 & ANSI Z87.1-2003
- Face Shield - meets CE EN166 3B, EN1731 F & ANSI Z87.1
- Hearing Protection - meets ANSI S3.19



Brush Guard Visor - T-01638

- Hearing and face protection for forestry use
- Face Shield - Rated to CA EN 1731/S, EN 97 0194 standards
- Hearing protection offers 23 dB noise reduction rating (NRR)



Forestry Face Screen - FACE SHIELD

- Replacement face screen for use with forestry safety helmets
- Meets CE EN166 3B, EN1731 F & ANSI Z87.1 standards



CHAINSAW SAFETY PANTS

Description	Size	Model No.
• Certified to C/UL CAN/BNQ 1923-450-M91 Class A standards • Zippered fly • 2 front and 2 rear pockets • Zippered ankles with button tabs • Available in sizes: 28/30, 32/34, 36/38, 40/42 and 44/46	28/30	MSP28-30
	32/34	T-01650
	36/38	T-01666
	40/42	T-01672
	44/46	MSP44-46

CHAINSAW FILES & FILE SETS

File Sets include File, Handle & Guide

Model	Type	File Size	Part No.
	Round	5/32"	953 030 010
		3/16"	953 030 030
		7/32"	953 009 000

FILE SETS BULK 12 / PK

Model	Type	File Size	Part No.
	Round	5/32"	953 003 090
		11/64"	953 003 100
		3/16"	953 003 070
		7/32"	953 003 040

6" FILE HANDLE - 953 004 010



- File Handle for Makita Chainsaw Files
- Use with round or flat files to re-sharpen chainsaw chain

OILS & LUBRICANTS

Model	Qty.	Particulars	Item No.
	48	50:1 Synthetic 2 Cycle Oil (3.8 L / 1 Gallon Mix)	T-00745C-48
		50:1 Synthetic 2 Cycle Oil (9.5 L / 2.5 Gallon Mix)	T-00739C-48
	6	50:1 - 2 Cycle Oil (200 ml / 6.8 fl. Oz)	181114-A6P
	48		181114-ACS
	4	Heavy (Summer) Bar & Chain Oil (4 x 1 Gallon)	181116-ACS2
		Light (Winter) Bar & Chain Oil (4 x 1 Gallon)	181120-ACS2

18" RESCUE BAR & CHAIN KIT - 957 415 060





- For Chainsaw EA7300
- Solid tungsten carbide cutting teeth offer quick cutting ability in a variety of materials
- Cuts through wood, shingles, metal (steel, aluminum, copper & alloys up to 3/64" thick), aerated concrete blocks, car bodies, railway cars and more!
- Ideal for cutting access and ventilation holes or in place of hydraulic shears
- For use by rescue services, fire departments, contractors and more!
- Includes: Chain Bar, 18" Rescue Chain, Depth Limiter
- Replacement 18" Rescue Chain (957 696 064)

3 YEAR/ANS WARRANTY GARANTIE DE LITHIUM-ION

WARRANTY STATEMENT

MAKITA CANADA INC.

Limited one year general product warranty:
All Makita tools purchased in Canada from authorized dealers are warranted to be free of defects from workmanship and materials for a period of ONE YEAR from the date of original purchase.

Limited 3 year warranty for lithium-ion powered outdoor power equipment and limited 2 year warranty for gas powered outdoor power equipment:
All Makita lithium-ion powered outdoor power equipment (OPE) shall be warranted to be free of defects from workmanship and materials for a period of THREE YEARS from the date of original purchase. All Makita gas powered OPE tools shall be warranted to be free of defects from workmanship and materials for a period of TWO YEARS from the date of original purchase (excludes gas powered compressors). This warranty includes tools used in consumer, commercial or rental applications. Accessories included with OPE products have a ONE YEAR warranty.

Limited three year pneumatic nailer, lithium ion tool, battery and charger warranty:
All Makita lithium ion products, lithium ion batteries and lithium ion Battery chargers are warranted to be free of defects from workmanship and materials for a period of THREE YEARS from the date of original purchase. Exclusions are, but not limited to, flashlights, work lights, job site radios, speakers, jackets/vests, power source adapters and Battery adapters. Products excluded have a ONE YEAR warranty. All Makita pneumatic nailers and staplers are warranted to be free of defects from workmanship and materials for a period of THREE YEARS from the date of original purchase. Any accessories included with pneumatic nailing / stapling products have a ONE YEAR warranty. **NOTE:** The limited THREE YEAR warranty for Pneumatic nailers, staplers as well as **Lithium Ion** batteries and chargers applies only to products purchased **in Canada** after April 1, 2018.

Makita warranty terms, limitations and exclusions:
Should any problem develop during the specified warranty period shown above, return the complete product (freight prepaid) to one of Makita's Factory or Authorized Service Centres in Canada. If a qualified inspection shows the problem is caused by defective workmanship or material, Makita may choose to repair and / or replace the product in question. This warranty does not apply where:

- **Repairs to the product have been made or attempted by others.**
- **Repairs to the product are required because of normal wear and tear. Regarding pneumatic nailers / staplers the following wear items will be covered under the Limited One year general warranty: piston / driver assemblies, piston cushions / stoppers, driver blades, rubber o-rings, seals and air filters.**
- **The product has been abused, misused or improperly maintained.**
- **Alterations have been made to the product.**
- **Regarding lithium ion products and chargers; the use of non-Makita brand batteries will void all warranties for these products.**

In no event shall Makita be liable for any indirect, incidental or consequential damages from the sale or use of the product. This disclaimer applies both during and after the term of this warranty. Makita disclaims liability for any implied warranties, including implied warranties of merchantability and fitness for a specific purpose, after the applicable term of this warranty. This warranty provides for specific legal rights. The provisions contained in this warranty are not intended to limit, modify or take away from, disclaim or exclude any warranties set forth in any legislation. To the extent required by law, the provisions in any provincial or federal legislation with respect to warranties take precedence over the provisions of this warranty.
This warranty is subject to change without notice.

Makita Canada **Order Desk & Distribution Centres**

Western Canada
Phone: 604-272-3104
Toll Free Phone: 1 800-663-0909
Toll Free Fax: 1 800-667-7078
Email: orderdeskmcv@makita.ca

Central, Québec & Eastern Canada
BILINGUAL SERVICE
Phone: 905-571-2200
Toll Free Phone: 1 800-263-3734
Toll Free Fax: 1 800-565-0906
Email (English): orderdeskmct@makita.ca
Email (Français): orderdeskmcq@makita.ca

FACTORY SERVICE CENTRES
6 LOCATIONS FROM COAST TO COAST

RICHMOND / VANCOUVER
11771 Hammersmith Way
Richmond, BC. V7A 5H6
Phone: 604-272-3104
Toll Free: 1 800-663-0909

EDMONTON
11614 - 149 Street NW
Edmonton, AB. T5M 3R3
Phone: 780-455-6644
Toll Free: 1 888-455-6644

SASKATOON
206A - 2750 Faithful Avenue
Saskatoon, SK. S7K 6M6
Phone: 306-931-0111
Toll Free: 1 888-931-0111

WHITBY / TORONTO
1950 Forbes Street
Whitby, ON. L1N 7B7
Phone: 905-571-2200
Toll Free: 1 800-263-3734

MONTREAL / ST. LEONARD
6389 Boulevard Couture
St. Leonard, QC. H1P 3J5
Phone: 514-323-1223
Toll Free: 1 800 361-7049

QUÉBEC CITY / LES SAULES
500 Avenue St. Jean Baptiste
Suite 100, Québec, QC.
G2E 6H5
Phone: 418-871-5720
Toll Free: 1 800-663-5757



Makita Canada Head Office & Distribution Centre
Whitby, Ontario

makita.ca

Printed in Canada 2025