





# **RULE THE OUTDOORS**

## **NEW SOLUTIONS FOR THE LANDSCAPER**

Your world is changing. Increasing regulations across the nation are limiting the use and availability of gas power equipment. This will affect how you run your business – and Makita is here to help with more battery-powered commercial products to replace your gas equipment. Makita brings leading innovation to the cordless power equipment category, with big numbers to back it up: 100+ years of motor engineering, 90+ years in gas equipment, and 40+ years in cordless. There is no other company in the industry with this expansive engineering capability. Makita offers a complete system of outdoor power equipment with more gas-replacement solutions for mowing, trimming, cutting and clean-ups. With a constant focus on new technology and power management, Makita meets the demands of today and tomorrow. So how will you RULE THE OUTDOORS?



**ConnectX™  
PORTABLE  
POWER SUPPLY**

Pgs. 2-3

**CORDLESS  
LAWNMOWERS**

Pgs. 8-9

**CORDLESS  
POWER CUTTERS  
& ACCESSORIES**

Pg. 10

**CORDLESS  
WHEELBARROWS  
& ACCESSORIES**

Pg. 11

**CORDLESS  
SPLIT SHAFT  
POWER UNITS  
& ATTACHMENTS**

Pgs. 12-13

**CORDLESS  
BRUSH CUTTERS  
& ACCESSORIES**

Pgs. 14-15

**CORDLESS  
LINE TRIMMERS  
& ACCESSORIES**

Pgs. 14-15



**CORDLESS  
BLOWERS  
& ACCESSORIES**

Pgs. 16-17

**CORDLESS  
HEDGE TRIMMERS  
& SHEARS  
& ACCESSORIES**

Pgs. 18-20

**CORDLESS  
SPRAYERS**

Pg. 20

**CORDLESS  
EARTH AUGER  
& ACCESSORIES**

Pg. 21

**CORDLESS  
CHAINSAWS  
& ACCESSORIES**

Pgs. 22-25

**CORDLESS  
RECIPROCATING  
SAWS  
& ACCESSORIES**

Pgs. 26-27

**BATTERIES &  
CHARGERS**

Pgs. 28-29

# CONNECTX™

COMMERCIAL OUTPUT




## HIGHER CAPACITY

Delivers 1,200 Watt Hours of Output



## LONGER RUN TIME

Ideal for all day work



## ULTIMATE COMPATIBILITY

Powers ConnectX™, 40V max XGT and 36V (18Vx2) LXT systems




## DURABLE DESIGN

IPX4-rated weather-resistant construction

## HIGHER CAPACITY. NO GAS.

PROVIDES THE RUN TIME NEEDED FOR ALL DAY WORK

ConnectX™ is a run-time and power solution for use with ConnectX™ products, as well as XGT and LXT tools and equipment when used with an adaptor. It accelerates the transition to battery power with a Backpack Power Supply (PDC1200A02), which packs a high-capacity 1,200Wh battery for all-day work and performance without the hassles of gas or cords.

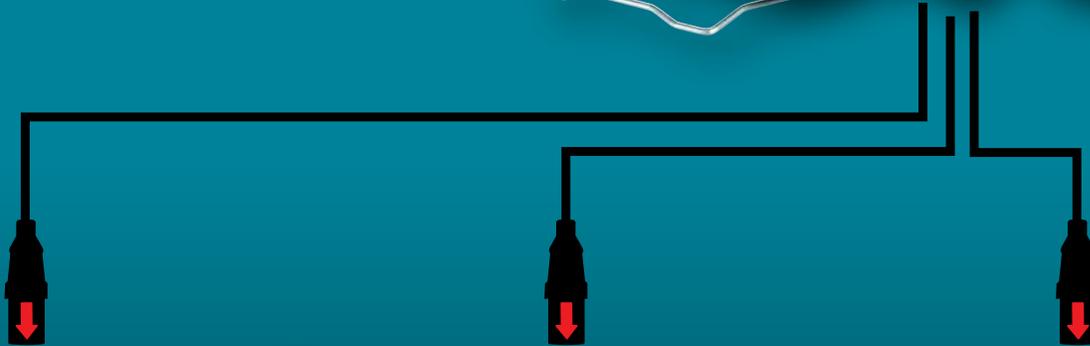

**CONNECTX™**  
DIRECT CONNECT



**XGT**  
40V max ADAPTER



**LXT**  
36V (18Vx2) ADAPTER





**CONNECTX™**

**XGT** 40V | 80V max. **36V** **18V**

**PDC1200A02**  
**ConnectX™ 1,200Wh Portable Backpack Power Supply**

- **High capacity 33.5Ah / 1,200Wh battery backpack for maximum power and continuous run time**
- Backpack utilizes integrated battery to provide long run time when used with 36V (18Vx2) LXT, 40V max XGT or Direct Connect power tools
- Provides up to 6X the run time when used with 36V (18Vx2) LXT products (with optional 36V (18Vx2) LXT Battery Adapter 191J51-5)
- Provides up to 13X the run time when used with 40V max XGT products (with optional 40V max XGT Battery Adapter, 191N62-4)
- Padded adjustable shoulder harness with quick release waist straps for operator comfort
- Battery box can be easily detached from the harness for use as a stationary power supply
- PDC1200A02 includes: Charger

Battery Capacity	33.5 Ah
Power Cord Length	5.6 ft (1.7 m)
Dimensions (L x W x H)	14-1/2" x 10-1/4" x 5-1/2" (36.9 cm x 26.1 cm x 13.9 cm)
Net Weight	22.9 lbs (10.4 kg)



PDC1200A02 Power Supply Sold Separately

**CONNECTX™**

**BL XPT**

**LM001CZ (Tool Only)**  
**ConnectX™ 21" Self-Propelled Commercial Lawn Mower**

- **Suitable for lawns up to 6,900 square meters (approx. 74,270 square feet) with PDC1200A02**
- Heavy duty durable steel deck can withstand harsh work environments
- IPX4 rated for maximum weather and water resistance
- Adjustable self-propelled speeds (2.5 - 5km/h) makes it easier to maneuver
- Powered by connecting to Makita's Portable Power Pack PDC01 or Makita's ConnectX™ 1,200Wh Portable Backpack Power Supply PDC1200A02 (Both Sold Separately)

Battery Capacities:	PDC01
	PDC1200A02
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed:	Normal Mode 2,800 RPM
	Soft No-Load Mode 2,300 / 2,800 RPM
	Noise Reduction Mode 2,300 RPM
Dimensions (L x W x H)	67-1/2" x 23-1/4" x 43" (171.5 cm x 59 cm x 109.5 cm)
Net Weight	90.85 lbs (41.21 kg)



**CONNECTX™**

**XGT** 40V | 80V max. **36V** **18V**

**PDC01X2**  
**PDC01 (Tool Only)**  
**Portable Power Pack**

- **Accepts up to four (4) Makita 18V LXT batteries for use with Makita 40V max XGT, 36V (18Vx2) LXT and 18V LXT power tools**
- 2x run time when used with 40V max XGT and 36V (18Vx2) LXT tools
- 4x run time when used with 18V LXT tools
- Detachable battery box can be used as a stationary power source for cordless mitre saws, chop saws and more
- Main power switch with auto-off function conserves battery power when not in use
- LED charge level indicators display approximate remaining battery power for each battery
- Padded harness with quick release shoulder and waist straps easily adjusts to comfortably fit any end user
- PDC01X2 includes: Two 18V LXT Batteries (5.0Ah) & Dual Port Rapid Charger

Battery Capacities	Up to Four 18V LXT Batteries
Power Cord Length	5.6 ft (1.7 m)
Dimensions (L x W x H)	15-3/4" x 10-5/8" x 5-7/8" (40 cm x 27 cm x 14.9 cm)
Net Weight	12.4lb (5.6 kg)



**CONNECTX™**

**BL XPT AFT ADT**

**UR201CZ (Tool Only)**  
**ConnectX™ 17" Line Trimmer (Loop Handle)**

- **1.0 kW motor with power equivalent to a 30cc gas motor**
- IPX4 water resistance rating
- 3 speed options (Low: 4,600 RPM, Medium: 5,500 RPM, High: 7,000 RPM) for power management
- 17" cutting swath for increased productivity
- Includes bump and feed trimmer head loaded with 0.080" twisted quiet line
- Powered by connecting to Makita's Portable Power Pack PDC01 or Makita's ConnectX™ 1,200Wh Portable Backpack Power Supply PDC1200A02 (Both Sold Separately)

Battery Capacities:	PDC01
	PDC1200A02
No Load Speed:	
Low	4,600 RPM
Medium	5,500 RPM
High	7,000 RPM
Cutting Width	17" (43 cm)
Overall Length	69" (175.4 cm)
Net Weight	7.3 lbs (3.3 kg)

**PDC1200A02**  
**PRODUCT FEATURES**



**PERFORMANCE**  
Delivers 1,200 Watt Hours of Output



**RUN TIME**  
Ideal for all day work; expected run times may vary by product, application, and workday amount



**COMPATIBILITY**  
Powers ConnectX™, 40V max XGT and 36V (18Vx2) LXT systems



**DESIGN**  
IPX4-rated weather-resistant construction

**BACKPACK POWER SUPPLY ADAPTERS**



**191N62-4**  
40V max XGT Adapter (Sold Separately)



**191J51-5**  
36V (18Vx2) LXT Adapter (Included with PDC01X2 and PDC01)



**191J50-7**  
18V LXT Adapter (Sold Separately)



**CONNECTX™**

**BL XPT**

**UB001CZ (Tool Only)**  
**ConnectX™ Turbo Blower**

- **Powerful performance delivers up to 622 CFM and 157 MPH of power**
- Torque boost mode delivers extra power when required from 530 CFM (112 MPH) to 622 CFM (157 MPH)
- Cruise control lever allows you to lock the variable speed trigger to a desired power level
- Integrated 3-stage telescopic nozzle up to 4"
- IPX4 rated for maximum weather and water resistance
- Powered by connecting to Makita's Portable Power Pack PDC01 or Makita's ConnectX™ 1,200Wh Portable Backpack Power Supply PDC1200A02 (Both Sold Separately)

Battery Capacities:	PDC01
	PDC1200A02
Maximum Air Volume	622 CFM (17.6 m³/min)
Maximum Air Velocity	157 MPH (70 m/sec)
No Load Speed	24,000 RPM
Overall Length	41-3/4" (106 cm)
Net Weight	5.7 lbs (2.6 kg)



PDC1200A02 Power Supply Sold Separately

**CONNECTX™**


**BL XPT**

**UB002CZ (Tool Only)**  
**ConnectX™ Backpack Blower**

- **Makita's first ConnectX™ Backpack Blower**
- Power and performance equivalent to 50cc engine Backpack Blower
- Cruise control lever allows operator to lock the variable speed trigger at the required power level
- Battery fuel gauge with 3 LED indicators allows operator to easily monitor current power level
- **Use ONLY with Makita's ConnectX™ 1,200Wh Portable Backpack Power Supply PDC1200A02 (Sold Separately)**

Battery Capacity:	PDC1200A02
Maximum Air Volume	0 - 671 CFM (0 - 19 m³/min)
Maximum Air Velocity	0 - 160 MPH (0 - 71.7 m/sec) - max
No Load Speed	0 - 22,000 RPM
Overall Length	54" (136.8 cm)
Net Weight	15.8 lbs (7.1 kg)

**NEW**

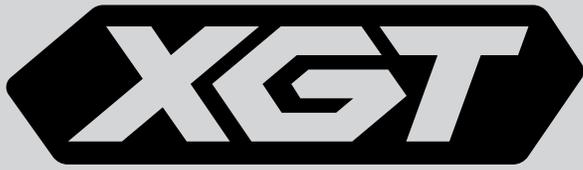

**40V | 80V max**

# A NEW SYSTEM OF EQUIPMENT & TOOLS

XGT is a 40V | 80V max system of cordless equipment and tools. XGT outpowers, outsmarts, and outlasts the rest. Through Makita's innovative engineering, the technology within the XGT system will create the equipment and tools of the future.

## 40V max




**100+**  
**PRODUCTS**  
**ONE SYSTEM**



# BEYOND LIMITS



**OUTPOWER**




**OUTSMART**




**OUTLAST**

**80V<sub>max</sub>**  
(40Vx2)

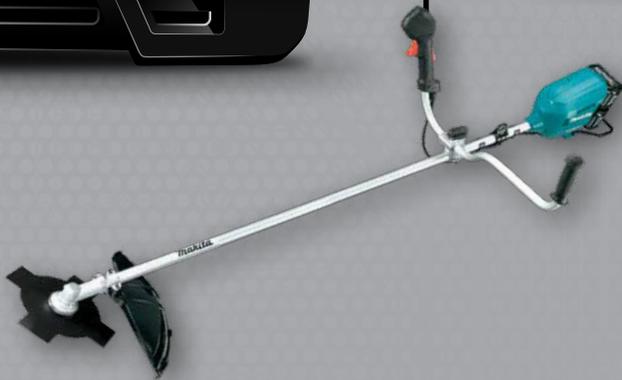

Learn more at [makita.ca](http://makita.ca) > XGT

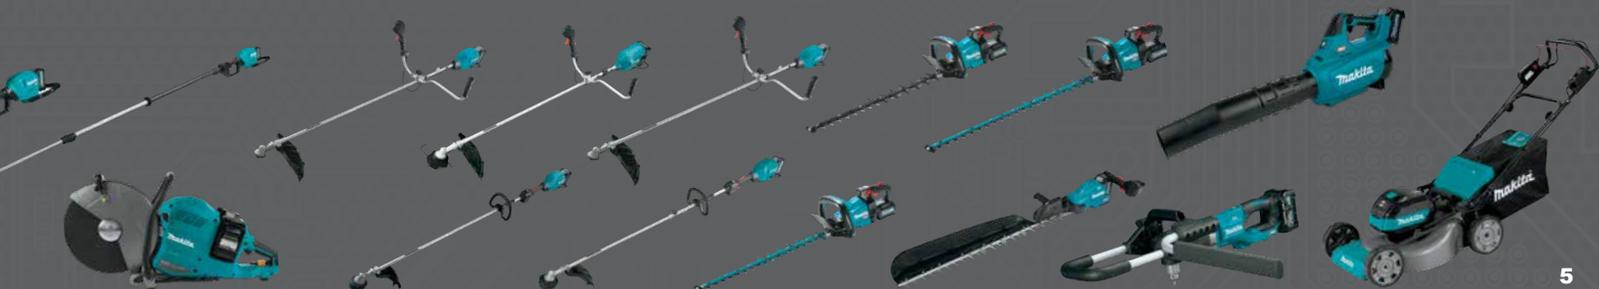

# LXT 18V | 36V

## ONE SYSTEM. ENDLESS POSSIBILITIES.

The LXT System is the world's largest compatible cordless tool system powered by 18V slide-style batteries. Makita's purpose-built motors, battery technology, and enhanced communications work together to deliver unmatched power, speed, and run time. Get maximum performance and efficiency with LXT Products for every trade.

# 18V



**320+**  
**PRODUCTS**  
**ONE SYSTEM**  
ENDLESS POSSIBILITIES



# MAXIMUM PERFORMANCE




LXT BATTERY

UP TO **50% MORE RUN TIME** <sup>1</sup>



RAPID CHARGING SYSTEM

UP TO **3X FASTER CHARGING** <sup>2</sup>



PURPOSE BUILT BRUSHLESS MOTOR

UP TO **50% LONGER MOTOR LIFE** <sup>3</sup>



STAR PROTECTION COMPUTER CONTROLS

**EFFICIENT POWER MANAGEMENT** <sup>4</sup>

<sup>1</sup> Vs. Makita 18V Ni-Cd Battery. <sup>2</sup> Vs Makita 18V Ni-Cd Charger. <sup>3</sup> Vs. Makita Cordless Motors with Brushes. <sup>4</sup> Protection against Overloading, Over-Discharging & Overheating.

## 36V (18Vx2)



Learn more at [makita.ca](http://makita.ca) > 18V LXT



LM001



**MAKITA**  
**CONNECTX™**  
run-time and  
power solution

**CONNECTX™**

LM001CZ (Tool Only)  
**ConnectX™**  
**21" Self-Propelled**  
**Commercial**  
**Lawn Mower**



**BL MOTOR XPT**

Battery Capacities:	Portable Power Pack (PDC01) ConnectX™ Portable Backpack Power Supply (PDC1200A02)
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed:	Normal Mode 2,800 RPM Soft No-Load Mode 2,300 / 2,800 RPM
	Noise Reduction Mode 2,300 RPM
Dimensions (L x W x H)	67-1/2" x 23-1/4" x 43" (171.5 cm x 59 cm x 109.5 cm)
Net Weight	90.85 lbs (41.21 kg)

- Suitable for lawns up to 6,900 square meters (approx. 74,270 square feet) with PDC1200A02
- Heavy duty durable steel deck can withstand harsh work environments
- IPX4 rated for maximum weather and water resistance
- Adjustable self-propelled speeds (2.5 - 5km/h) makes it easier to maneuver
- 3-in-1 capability enables mulching, rear bagging or side discharge
- Single lever adjustment for 10 cutting heights from 13/16" - 3-15/16"
- 9" Heavy-duty ball bearing wheels for less effort while mowing and extended durability
- 2-step safety handle with child lock key prevents accidental start ups
- Powered by connecting to Makita's Portable Power Pack PDC01 or Makita's ConnectX™ 1,200Wh Portable Backpack Power Supply PDC1200A02 (Both Sold Separately)

**64V Li-ion max**

LM002JM101  
**64V max Li-ion**  
**21" Lawn Mower**



**NEW**

**BL MOTOR XPT**

Battery Capacities	64V max Li-Ion
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed:	Normal Mode 2,800 RPM Soft No-Load Mode 2,300 / 2,800 RPM
	Noise Reduction Mode 2,300 RPM
Dimensions (L x W x H)	71" x 23" x 43" (180 cm x 58.5 cm x 109 cm)
Net Weight	61.3 lbs (27.8 kg)

- Suitable for lawns up to 1,600 square meters (approx. 17,220 square feet)
- Large lightweight plastic deck with 21" cutting width ensures the job is completed with less passes
- 3-in-1 capability enables mulching, rear bagging or rear discharge
- Grass level indicator shows operator when clipping bag is full
- Low noise mode adjusts to the condition of the grass being mowed for more efficient quieter operation and increased battery life
- LM002JM101 includes: One 64V max Li-Ion Battery (4.0Ah) & Charger

**18V + 18V → 36V**  
**LXT**

DLM536PT4  
DLM536Z (Tool Only)  
**36V (18Vx2) LXT**  
**21" Self-Propelled**  
**Lawn Mower**



**NEW**

**BL MOTOR XPT**

Battery Capacities	Two 18V LXT
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed:	Normal Mode 2,800 RPM Energy-Saving Mode 2,300 RPM
Dimensions (L x W x H)	67-1/2" x 23-1/4" x 43" (171.5 cm x 59 cm x 109.5 cm)
Net Weight	91.3 lbs (41.4 kg)

- Suitable for lawns up to 2,300 square meters (approx. 24,800 square feet)
- 36V (18Vx2) innovation accepts second set of 18V batteries with manual switch to provide twice the mowing capacity
- Large steel deck with 21" cutting width ensures the job is completed with fewer passes
- Adjustable self-propelled speeds with on/off switch provides operator comfort and reduces fatigue
- 3-in-1 capability enables mulching, rear bagging or side discharge
- DLM536PT4 includes: Four 18V LXT Batteries (5.0Ah) & Rapid Charger

**18V + 18V → 36V**  
**LXT**

DLM539CT2  
DLM539Z (Tool Only)  
**36V (18Vx2) LXT**  
**21" Self-Propelled**  
**Lawn Mower**



**XPT**

Battery Capacities	Two 18V LXT
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed	3,000 RPM
Dimensions (L x W x H)	73-1/2" x 22-3/4" x 41" (187 cm x 58 cm x 104 cm)
Net Weight	64.7 lbs (29.32 kg)

- Suitable for lawns up to 700 square meters (approx. 7,530 square feet)
- DC motor with 860 W of power designed to cut thick grass quickly and easily
- Large plastic deck with 21" cutting width ensures the job is completed with fewer passes
- Adjustable self-propelled speeds with on/off switch provides operator comfort and reduces fatigue
- 3-in-1 capability enables mulching, rear bagging or rear discharge
- Grass level indicator shows operator when clipping bag is full
- DLM539CT2 includes: Two 18V LXT Batteries (5.0Ah) & Dual Port Charger

**18v + 18v → 36v**  
**LXT**



DLM530PT2  
DLM530Z (Tool Only)  
**36V (18Vx2) LXT**  
**21" Lawn Mower**

**BL MOTOR XPT**

Battery Capacities	Two 18V LXT
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed	2,300 RPM
Dimensions (L x W x H)	67-1/2" x 23-1/4" x 43" (171.5 cm x 59 cm x 119.5 cm)
Net Weight	76.8 lbs (34.8 kg)

- Suitable for lawns up to 2,300 square meters (approx. 24,800 square feet)
- Brushless DC motor with 1.6 kW of power designed to cut thick grass quickly and easily
- Large steel deck with 21" cutting width ensures the job is completed with fewer passes
- 3-in-1 capability enables mulching, rear bagging or side discharge
- Grass level indicator shows operator when clipping bag is full
- Low noise mode adjusts to the condition of the grass being mowed for more efficient quieter operation and increased battery life.
- DLM530PT2 includes: Two 18V LXT Batteries (5.0Ah) & Dual Port Rapid Charger

**18v + 18v → 36v**  
**LXT**



DLM538CT2  
DLM538Z (Tool Only)  
**36V (18Vx2) LXT**  
**21" Lawn Mower**

**XPT**

Battery Capacities	Two 18V LXT
Cutting Width	21" (53.4 cm)
Range of Height	13/16" - 3-15/16" (2 - 10 cm)
Step	10 Steps
Grass Box Capacity	70 L
No Load Speed	3,000 RPM
Dimensions (L x W x H)	73-1/2" x 22-3/4" x 41" (187 cm x 58 cm x 104 cm)
Net Weight	58.9 lbs (26.7 kg)

- Suitable for lawns up to 800 square meters (approx. 8,600 square feet)
- DC motor with 860 W of power designed to cut thick grass quickly and easily
- Large plastic deck with 21" cutting width ensures the job is completed with fewer passes
- 3-in-1 capability enables mulching, rear bagging or rear discharge
- Grass level indicator shows operator when clipping bag is full
- 10 cutting heights for optimum grass length from 13/16" - 3-15/16" achieved with a single lever for adjustment
- DLM538CT2 includes: Two 18V LXT Batteries (5.0Ah) & Dual Port Charger

**18v + 18v → 36v**  
**LXT**



DLM460Z (Tool Only)  
**36V (18Vx2) LXT**  
**18" Lawn Mower**

**BL MOTOR XPT**

Battery Capacities	Two 18V LXT
Cutting Width	18" (46 cm)
Range of Height	13/16" - 2-15/16" (2 - 7.5 cm)
Step	10 Steps
Grass Box Capacity	60 L
No Load Speed	2,500 RPM
Dimensions (L x W x H)	66-1/8" x 21" x 49-3/4" (168 cm x 53.2 cm x 126.5 cm)
Net Weight	57.8 lbs (26.2 kg)

- Suitable for lawns up to 678 square meters (approx. 7,300 square feet)
- Brushless motor delivers 2,500 - 3,300 RPM for faster cutting
- Perfect for large lawns providing mulching and rear bagging capabilities
- Heavy duty durable steel deck provides 18" cut
- Mulching and rear bagging capabilities
- Powerful 36V (18Vx2) cutting performance while remaining environmentally friendly
- Quiet mode reduces noise by providing constant speed control at 2,500 RPM
- Cuts up to 7,300 square feet using two 5.0Ah batteries (batteries not included)

**18v + 18v → 36v**  
**LXT**



DLM432CT2  
DLM432Z (Tool Only)  
**36V (18Vx2) LXT**  
**17" Lawn Mower**

**XPT**

Battery Capacities	Two 18V LXT
Cutting Width	17" (43 cm)
Range of Height	13/16" - 2-15/16" (2 - 7.5 cm)
Step	13 Steps
Grass Box Capacity	50 L
No Load Speed	3,600 RPM
Dimensions (L x W x H)	55-1/2" x 17-3/4" x 39-1/2" (141 cm x 45 cm x 100.5 cm)
Net Weight	36.4 lbs (16.5 kg)

- Suitable for lawns up to 560 square meters (approx. 6,027 square feet)
- Lightweight plastic cutting deck offers operator easy handling
- Features rear bagging with mulching capabilities from optional mulching plug set (part no. 191D46-2)
- Single lever adjustment for 13 cutting heights from 13/16" - 3-15/16"
- Heavy-duty ball bearing wheels (front 5-1/2" and rear 6-5/16") for less effort while mowing and extended durability
- 17" cutting width provides a compact cutting solution for small size lawns
- Dual LED charge level indicators display approximate remaining battery power
- DLM432CT2 includes: Two 18V LXT Batteries (5.0Ah) & Dual Port Charger

**18v + 18v → 36v**  
**LXT**



DLM382CM2  
DLM382Z (Tool Only)  
**36V (18Vx2) LXT**  
**15" Lawn Mower**

**XPT**

Battery Capacities	Two 18V LXT
Cutting Width	15" (38 cm)
Range of Height	13/16" - 2-15/16" (2 - 7.5 cm)
Step	13 Steps
Grass Box Capacity	40 L
No Load Speed	3,700 RPM
Dimensions (L x W x H)	55-1/2" x 17-3/4" x 39-1/2" (141 cm x 45 cm x 100.5 cm)
Net Weight	36.4 lbs (16.5 kg)

- Suitable for lawns up to 560 square meters (approx. 6,000 square feet)
- Lightweight plastic cutting deck offers operator easy handling
- Features rear bagging with mulching capabilities from optional mulching plug set (part no. 191D46-2)
- Single lever adjustment for 13 cutting heights from 13/16" - 3-15/16"
- Heavy-duty ball bearing wheels (front 5-1/2" and rear 6-5/16") for less effort while mowing and extended durability
- 15" cutting width provides a compact cutting solution for small size lawns
- Dual LED charge level indicators display approximate remaining battery power
- DLM382CM2 includes: Two 18V LXT Batteries (4.0Ah) & Dual Port Charger

**18V LITHIUM-ION**  
**LXT**



DLM330M001  
**18V LXT**  
**13" Lawn Mower**

**XPT**

Battery Capacities	18V LXT
Cutting Width	13" (33 cm)
Range of Height	13/16" - 2-15/16" (2 - 7.5 cm)
Step	8 Steps
Grass Box Capacity	30 L
No Load Speed	4,300 RPM
Dimensions (L x W x H)	55-3/4" x 14-3/4" x 40-1/4" (141.5 cm x 37.5 cm x 102 cm)
Net Weight	28.0 lbs (12.7 kg)

- Suitable for lawns up to 270 square meters (approx. 2,900 square feet)
- Optimal for use in a home garden where the ability to turn in a small radius is required
- 3-in-1 - Cutting / Collecting / Mulching • Lock-off / Lock-on switch • Soft start
- Battery capacity warning lamp • Electric brake • Handle height adjustment (3 stages) • Foldable handle
- Compact storage of grass catcher allows for space saving vertical storage
- Mulching function (Mulching plug required) • Plastic cutting deck
- Rigid handle • Carrying handle • Easy to operate handle lock levers
- DLM330M001 includes: One 18V LXT Battery (4.0Ah) & Charger

**NEW**

CE001GL401 / CE001GZ02 (Tool Only)  
**40V max XGT 14" Power Cutter**

**BL MOTOR XPT AFT**

Battery Capacities	Two 40V max XGT
Blade Diameter	14" (35 cm)
Arbor	1" (2.5 cm)
Maximum Cutting Depth	5" (12.7 cm)
No Load Speed	5,300 RPM
Overall Length	31" (78.6 cm)
Net Weight	22.8 lbs (10.3 kg)

**XGT** 40V | 80V max

**NEW**



- **Makita's first 14" Cordless Power Cutter**
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Electronic current limiter protects motor from accidental overload
- High no load cutting speed for fast and efficient cutting in a wide range of materials
- Anti-restart feature prevents accidental startup for operator safety
- Anti-vibration housing with integrated spring and drive unit prevents vibration transmission to front and rear handles
- CE001GL401 includes: Four 40V max XGT Batteries (8.0Ah) & Dual Port Rapid Charger

Use CE001 and DCE090 with optional **Pressurized Water Tank** (part no. 988 394 610) for 100% cordless concrete cutting (sold separately)



DCE090ZX1 (Tool Only)  
**36V (18Vx2) LXT 9" Power Cutter**

**BL MOTOR XPT AFT ADT**

Battery Capacities	Two 18V LXT
Blade Diameter	9" (23 cm)
Arbor	7/8" (2.2 cm)
Maximum Cutting Depth	3-1/2" (8.8 cm)
No Load Speed	6,600 RPM
Overall Length	21-3/4" (55.4 cm)
Net Weight	10.9 lbs (4.9 kg)

18V + 18V → 36V  
**LXT**



- **Deepest cut depth in class ZERO emissions**
- **NO fuel mixing - LOWER noise - LOWER vibration**
- LED job light illuminates cutting area
- Soft start feature gradually increases speed to eliminate start up shock
- Electronic current limiter prevents motor burnout caused by overloading
- Electric brake stops blade 2-4 seconds after the trigger is released for increased operator safety
- Battery cover protects batteries from water damage in wet cutting applications
- Lock-off button prevents accidental startup

**OPTIMUM Diamond Blades with Segmented Rim**

- **Segmented Rim for quick cutting. Ideal for general purpose use in concrete, tile, brick and stone.**
- Optimum Bond Matrix provides the optimal balance between wear, fracture and exposure in order to maximize the cutting ability of the diamond content



E-16748

Blade Diameter	Arbor	Rim Type	Wet / Dry	Material Type	Application	Maximum RPM	Part No.
14"	20 mm 1"	Segmented	Wet / Dry	Medium	Reinforced Concrete, Block, Brick, Masonry	5,500	E-16748
				Hard	Granite, Ceramic, Stone, Fire Brick		E-02646
				Medium	Cured Concrete, Block, Brick, Masonry	5,400	E-01719 (1 / Pk) B-69646 (3 / Pk)
				Medium & Soft	Concrete & Asphalt		E-02652
				Medium & Soft	Concrete & Asphalt		B-69674
12"	20 mm 1"	Segmented	Wet / Dry	Soft	Brick, Sandstone, Concrete Block	6,300	E-02587
				Medium	Cured Concrete, Block, Brick, Masonry		E-02521
9"	7/8"	Segmented	Wet / Dry	Medium & Soft	Concrete & Asphalt	6,650	B-69668
				Medium	Cured Concrete, Block, Brick, Masonry		E-02973



E-16748

**Abrasive Wheels**

Wheel Diameter	Arbor	Thickness	Wet / Dry	Application	Maximum RPM	Part No.
14"	1"	5/32"	Dry	Steel & Ferrous Metals	5,500	724416-2
			Wet / Dry	Concrete, Stone, Masonry & Asphalt		721712-9
	20 mm	3/16"	Dry	Steel & Ferrous Metals	721713-7	
12"	20 mm	1/8"	Wet / Dry	Concrete, Stone, Masonry & Asphalt	5,400	721710-3
			Dry	Steel & Ferrous Metals	6,400	724415-4
9"	7/8"	0.079"	Dry	Steel, Stainless Steel	6,650	E-03012



**Vacuum Brazed Diamond Rescue Wheel**

- **Ideal for fire departments, rescue services, contractors and more**
- Developed specifically for rescue operations, including cutting through airplanes, trains and crash barriers
- Vacuum brazed diamond segments for optimum operational life and consistent performance
- Ideal for cutting steel, stainless steel, alloys, aluminum, resin, PVC, concrete, reinforced glass, fibre-reinforced plastics and more

Blade Diameter	Arbor	Rim Type	Wet / Dry	Application	Maximum RPM	Part No.
9"	7/8"	Segmented Rim	Dry	Steel, stainless steel, alloys, aluminum, resin, PVC, concrete, reinforced glass, fibre-reinforced plastics	6,500	B-56982



DCU180ZX1



DCU180ZX2

# 287 LBS MAXIMUM LOAD CAPACITY



DCU180ZX1



DCU180ZX2

DCU180ZX1 (With Flatbed Tray / Tool Only)  
 DCU180ZX2 (With Bucket / Tool Only)  
**18V LXT Power-Assisted Wheelbarrows**



Battery Capacities	18V LXT
Maximum Speed:	
Forward, High / Low	0 - 3.5 km/h / 0 - 1.5 km/h
Reverse	0 - 1.0 km/h
Minimum Turning Radius	
(Outer diameter when turning with front wheel as axis)	110 cm
Maximum Climbing Capacity	12°
Maximum Load Capacity	287 lbs (130 kg)
Overall Dimensions (L x W x H):	
DCU180ZX1: 61-1/2" x 41-3/4" x 35-1/2" (156 cm x 106 cm x 90 cm)	
DCU180ZX2: 51-1/2" x 31-1/8" x 35-1/2" (131 cm x 79 cm x 90 cm)	
Net Weight:	DCU180ZX1: 97.5 lbs (44.2 kg) DCU180ZX2: 86 lbs (39 kg)

Each Wheelbarrow holds **TWO 18V LXT Batteries** but operates using **ONE 18V Battery** at a time, utilizing the **second 18V LXT Battery** when needed



- Up to 60 minutes of run time on a single 18V battery (6.0Ah)
- 2-speed with maximum speed up to 2.5 MPH on a 12° incline
- Interchangeable steel tube flat bed or steel bucket
- Maximum load capacity up to 287 lbs (130 kg)
- 7" mechanical disc brake for faster stopping
- Rear wheel spacing is adjustable from 19" to 30" to accommodate the work environment
- L-shaped legs can be easily installed to replace rear wheels
- L.E.D. lights on each side of frame to illuminate the work area
- L.E.D. battery charge indicators show charge level for each 18V LXT battery
- Rubberized soft grip handles provide increased comfort on the job; adjust to 3 heights



## 18V LXT Power-Assisted Wheelbarrow Accessories

### Flatbed Tray 199116-7



- Ideal for loading heavy duty bulky material such as bricks, concrete bags and more
- Easy four bolt installation and removal
- Side rails install in up or down position; large knob for easy adjustment
- For use with Makita Power Assisted Wheelbarrow model DCU180Z

### Bucket 198494-2



- Ideal for transporting material on job sites
- For use with Makita Power Assisted Wheelbarrow model DCU180Z
- Easy four bolt installation and removal
- Heavy duty steel based bucket for tough workloads



**Utilizes a Quick Release  
Accessory Mounting System**



**XGT** 40V | 80V max



UX01GZ02  
(Includes 16-1/2" Line Trimmer Attachment)  
UX01GZ (Tool Only)  
**40V max XGT  
Split Shaft Power Unit**

**BL XPT AFT**

Battery Capacities	40V max XGT
No Load Speed:	
Low	5,700 RPM
Medium	8,200 RPM
High	9,700 RPM
Overall Length	39-1/2" (100.1 cm)
Net Weight	8.6 lbs (3.9 kg)

- High power Brushless Motor enables work under heavy load
- Smaller protector guard increases cutting area visibility
- Straight shaft style provides greater reach compared to a curved shaft
- 3-speed options (Low: 5,700 RPM, Medium: 8,200 RPM, High: 9,700 RPM) for active power management
- UX01GZ02 includes: EM405MP 16-1/2" Line Trimmer Attachment

**18v + 18v → 36v**  
**LXT**



DUX60PGM5X / DUX60PTM5X / DUX60ZM5X  
(Includes 16-1/2" Line Trimmer Attachment)  
DUX60Z (Tool Only)  
**36V (18Vx2) LXT  
Split Shaft Power Unit**

**BL XPT AFT**

Battery Capacities	Two 18V LXT
No Load Speed:	
Low	5,700 RPM
Medium	8,200 RPM
High	9,700 RPM
Overall Length	39-3/4" (101.1 cm)
Net Weight	9.8 lbs (4.4 kg)

- High power Brushless Motor enables work under heavy load
- Perfect for the person who wants only one power unit and several options to expand
- High / Medium / Low 3-speed selection and variable speed control by trigger
- DUX60PGM5X includes: EM405MP 16-1/2" Line Trimmer Attachment, Two 18V LXT Batteries (6.0Ah) & Dual Port Rapid Charger
- DUX60PTM5X includes: EM405MP 16-1/2" Line Trimmer Attachment, Two 18V LXT Batteries (5.0Ah) & Dual Port Rapid Charger
- DUX60ZM5X includes: EM405MP 16-1/2" Line Trimmer Attachment

**18V**  
**LITHIUM-ION**  
**LXT**



DUX18RMEX2  
DUX18ZX2 / DUX18Z (Tool Only)  
**18V LXT Split Shaft Power Unit**

**BL XPT AFT**

Battery Capacities	18V LXT
No Load Speed:	
Low	6,800 RPM
High	9,700 RPM
Overall Length	38-1/2" (97.7 cm)
Net Weight	5.3 lbs (2.4 kg)

- High power Brushless Motor enables work under heavy load
- Multi-tool system consisting of power head and versatile optional attachments is ideal for a wide range of applications
- High / Low 2-speed selection and variable speed control by trigger
- Variable speed control (high: 0 - 9,700, low: 0 - 6,800 RPM) allows the user to match speed to application
- Constant speed control maintains constant speed under load
- DUX18RMEX2 includes: EY402MP Pole Chainsaw Attachment, Two 18V LXT Batteries (4.0Ah) & Rapid Charger
- DUX18RMEX2 includes: EM409MP 13" Line Trimmer Attachment, Two 18V LXT Batteries (4.0Ah) & Rapid Charger
- DUX18ZX2 includes: EM409MP 13" Line Trimmer Attachment

**Split Shaft Unit &  
Attachments Tool Bag**  
**195638-5**



**Specifically designed for  
Split Shaft Engine Units  
and Attachments**

- Weather resistant durable nylon cordura construction
- External pockets for storage of accessories and more
- Dual and single inside pockets for maximum storage versatility
- Approximately 48" x 14" x 12" (120 cm x 35 cm x 12 cm)

**UB401MP  
Blower  
Attachment**



Maximum Air Volume	579 CFM (16.4 m³/min)
Maximum Air Velocity	146 MPH (65.3 m/s)
No Load Speed (RPM)	9,450 RPM
Length	35-1/4" (89.5 cm)
Weight	4.6 lbs (2.1 kg)

- Ideal for blowing leaves, grass, sawdust, snow, dirt, debris and more
- Use with optional Gutter Cleaning Attachment (part no. 191B03-8 and 191J13-3)



**EM400MP / EM401MP\***  
**Line Trimmer (Straight Shaft) Attachment / Large Guard**

Cutting Width	16-1/2" (42 cm)
Spindle Size / Thread	M10, Left handed
Overall Length	34-1/2" (87.6 cm)
Net Weight	2.2 lbs (1.0 kg)

- Straight shaft style preferred by professional end users due to longer reach
- EM401MP includes parts for Brush Cutter (Blade sold separately)



**EM405MP**  
**Line Trimmer (Straight Shaft) Attachment / Small Guard**

Cutting Width	16-1/2" (42 cm)
Spindle Size / Thread	M10, Left Handed
Overall Length	34-1/2" (87.6 cm)
Net Weight	2.8 lbs (1.3 kg)

- Smaller protector guard than EM400MP for a clearer view of work area
- Straight shaft style preferred by professional end users due to longer reach



**EM409MP**  
**Line Trimmer (Straight Shaft) Attachment / Small Guard**

Cutting Width	13" (33 cm)
Spindle Size / Thread	M10, Left Handed
Overall Length	36-1/4" (92 cm)
Net Weight	2.7 lbs (1.2 kg)

- Smaller protector guard enables operator to maintain a clearer view of cutting area
- Straight shaft style preferred by professional end users due to longer reach



**LE400MP**  
**Extension Shaft Attachment**

Overall Length	45" (114 cm)
Net Weight	2.5 lbs (1.13 kg)

- Enables operator to achieve added reach when used with Pole Hedge Trimmer Attachment (EN400MP) or Pole Chain Saw Attachment (EY401MP)



**EN401MP**  
**Angle Hedge Trimmer Attachment**

Cutting Length	21" (53.5 cm)
Cutting Radius	135° (90° / 45°)
Shaft Length	59" (150 cm)
Net Weight	5.4 lbs (2.4 kg)

- Ideal for trimming hard to reach areas of hedges and bushes
- 135° cutting radius for maximum versatility of operation
- Angle adjusting lever allows operator to quickly and accurately adjust the angle of operation based on the application



**EN410MP**  
**Straight Hedge Trimmer Attachment**

Cutting Length	19-1/4" (49 cm)
Shaft Length	43-1/2" (110.4 cm)
Net Weight	4.5 lbs (2.0 kg)

- Compact and lightweight design ideal for trimming hedges and shrubs



**EY402MP**  
**Pole Chain Saw Attachment**

Guide Bar Length	10" (25 cm)
Chain Gauge	0.043"
Chain Pitch	3/8"
Oil Tank Capacity	160 ml
Overall Length	45-1/2" (116 cm)
Net Weight	4.2 lbs (1.9 kg)

- Ideal for pruning branches in tall trees or in hard to reach areas
- Integrated branch hook helps remove cut branches from trees



**KR401MP**  
**Cultivator Attachment**

Outer Blade Diameter	8-5/8" (22 cm)
Cultivating Width	8-5/8" (22 cm)
Overall Length	38" (96.5 cm)
Net Weight	7.0 lbs (3.2 kg)

- Ideal for cultivating small garden beds and between existing rows of vegetables or flowers



**EE400MP**  
**Edger Attachment**

Blade Diameter	8" (20.3 cm)
Overall Length	35-1/2" (90.1 cm)
Net Weight	5.4 lbs (2.4 kg)

- Quickly and easily cuts through turf to define edge of garden beds, sidewalks, driveways and more



**EN420MP**  
**Ground & Hedge Trimmer Attachment**

Cutting Length	9-7/8" (25 cm)
Cutting Radius	135° / 90° / 45°
Shaft Length	54-1/2" (138.4 cm)
Net Weight	5.5 lbs (2.5 kg)

- Ideal for trimming hard to reach areas of hedges and bushes
- Short cutting length enables effective trimming of grasses, climbing plants and small scrub brush around buildings and walls, driveways and walkways, architectural and landscaping elements and more



**BR400MP**  
**Power Brush Attachment**

Brush Diameter	9-7/8" (25 cm)
Brush Width	23-5/8" (60 cm)
Overall Length	45" (114.5 cm)
Net Weight	13.9 lbs (6.3 kg)

- The power bristle brush attachment is an effective tool for removing debris from cracks and crevices of hard surfaces.



**SW400MP**  
**Power Sweep Attachment**

Sweep Drum Diameter	10-3/8" (26.5 cm)
Sweep Drum Width	23-1/4" (59 cm)
Overall Length	45-1/2" (111 cm)
Net Weight	15.8 lbs (7.2 kg)

- Power Sweep paddle attachment cleans up dirt along roads and sidewalks, moves pebbles and sand in turf, as well as water and light snow along flat surfaces.



**NEW**  
UR012GZ01

**NEW**  
UR0126GT101  
UR006GZ01

- Features a bike handle design for improved grip
- Powered by two 40V max XGT batteries in series (UR012 only)
- Applicable to heavy-duty operation due to high output power similar to 40cc class engine (UR012 only)
- 3 speed options for power management
- Reverse rotation function allows operator to quickly clear trimmer head of entangled grass and weeds
- UR006GT101 includes: One 40V max XGT Battery (5.0Ah) & Rapid Charger

UR012GZ01 (Tool Only)  
UR006GT101 / UR006GZ01 (Tool Only)  
**80V & 40V max XGT Brush Cutters (Offset Bike Handle)**

**BL MOTOR XPT AFT ADT**

Battery Capacities UR012	Two 40V max XGT
Battery Capacities UR004	40V max XGT
No Load Speed UR012:	Low 0 - 3,500 RPM Medium 0 - 5,000 RPM / High 0 - 6,400 RPM
No Load Speed UR006:	Low 0 - 4,600 RPM Medium 0 - 5,500 RPM / High 0 - 7,000 RPM
Cutting Width:	UR012: 10" (25.5 cm) UR006: 9" (23 cm)
Overall Length:	UR012: 70-1/2" (179 cm) UR006: 71-1/2" (181.5 cm)
Net Weight:	UR012: 14.9 lbs (6.76 kg) UR006: 10.8 lbs (4.88 kg)

**CONNECTX™**



UR201CZ (Tool Only)  
**ConnectX™ 17" Line Trimmer (Loop Handle)**

**BL MOTOR XPT AFT ADT**

Battery Capacities:	Portable Power Pack (PDC01) ConnectX™ Portable Backpack Power Supply (PDC1200A02)
No Load Speed:	Low 4,600 RPM Medium 5,500 RPM High 7,000 RPM
Cutting Width	17" (43 cm)
Overall Length	69" (175.4 cm)
Net Weight	7.3 lbs (3.3 kg)

- 1.0 kW motor with power equivalent to a 30cc gas motor
- 3 speed options (Low: 4,600 RPM, Medium: 5,500 RPM, High: 7,000 RPM) for power management
- 17" cutting swath for increased productivity
- Includes bump and feed trimmer head loaded with 0.080" twisted quiet line
- Powered by connecting to Makita's Portable Power Pack PDC01 or Makita's ConnectX™ 1,200Wh Portable Backpack Power Supply PDC1200A02 (Both Sold Separately)



**NEW**

UR008GT101  
UR008GZ01 (Tool Only)  
**40V max XGT 17" Line Trimmer (Loop Handle)**

**BL MOTOR XPT AFT ADT**

Battery Capacities	40V max XGT
No Load Speed:	Low 0 - 4,000 RPM Medium 0 - 4,600 RPM High 0 - 6,000 RPM
Cutting Width	17" (43 cm)
Overall Length	71" (180.3 cm)
Net Weight	9.5 lbs (4.28 kg)

- Heavy duty trimming power equivalent to a 30cc gas model
- Automatic Torque Drive Technology (ADT) mode automatically shifts from 4,000-6,000 RPM for extended run time or added power
- 3 speed options (Low: 4,000 RPM, Medium: 4,600 RPM, High: 6,000 RPM) for power management
- UR008GT101 includes: One 40V max XGT Battery (5.0Ah) & Rapid Charger



DUR369NZ (Tool Only)  
**36V (18Vx2) LXT 17" Line Trimmer (Loop Handle)**

**BL MOTOR XPT AFT ADT**

Battery Capacities	40V max XGT
No Load Speed:	Low 3,500 RPM Medium 5,300 RPM High 6,500 RPM
Cutting Width	15" (38 cm)
Overall Length	72-1/2" (183.4 cm)
Net Weight	10.6 lbs (4.8 kg)

- Our most powerful Line Trimmer equipped with a 1.0 kW motor
- 1.0 kW motor with power equivalent to a 30cc gas motor
- 3 speed options (Low: 4,000 RPM, Medium: 4,600 RPM, High: 6,000 RPM) for power management
- 17" cutting swath for increased productivity
- Includes bump and feed trimmer head loaded with 0.080" twisted quiet line



UR002GZ

UR003GZ

UR002GZ (Offset Bike Handle)  
UR003GZ (Loop Handle)  
(Tools Only)  
**40V max XGT 15" Line Trimmers**

**BL MOTOR XPT AFT ADT**

Battery Capacities	40V max XGT
No Load Speed:	Low 3,500 RPM Medium 5,300 RPM High 6,500 RPM
Cutting Width	15" (38 cm)
Overall Length	68-1/4" (173.5 cm)
Net Weight:	UR002: 8.7 lbs (3.9 kg) UR003: 7.56 lbs (3.43 kg)

- 3-speed options (Low: 3,500 RPM, Medium: 5,300 RPM, High: 6,500 RPM) for power management
- Makita built rotor rotor brushless direct drive system provides high power and speed
- Includes bump and feed trimmer head with 0.080" twisted quiet line
- Reverse mode for clearing entangled debris from the cutting head



DUR368LPT2  
DUR368LZ

DUR368AZ

DUR368LPT2 (Loop Handle)  
DUR368LZ (Loop Handle) (Tool Only)  
DUR368AZ (Offset Bike Handle) (Tool Only)  
**36V (18Vx2) LXT 15" Line Trimmers**

**BL MOTOR XPT AFT ADT**

Battery Capacities	Two 18V LXT
No Load Speed:	Low 3,500 RPM Medium 5,300 RPM High 6,500 RPM
Cutting Width	15" (38 cm)
Overall Length	69-1/4" (175.8 cm)
Net Weight:	DUR368L: 7.1 lbs (3.2 kg) DUR368A: 7.5 lbs (3.4 kg)

- Powerful quiet trimming with Automatic Torque Drive Control Technology
- 3 speed options (Low: 3,500 RPM, Medium: 5,300 RPM, High: 6,500 RPM) for power management
- 15" cutting swath for increased productivity
- DUR368LPT2 includes: Two 18V LXT Batteries (5.0Ah) & Dual Port Rapid Charger



DUR191



DUR191LZX3 (Tool Only)  
**18V LXT 13" 2 Piece Line Trimmer (Loop Handle)**

**BL MOTOR XPT AFT ADT**

Battery Capacities	18V LXT
No Load Speed:	Low 3,500 RPM Medium 5,100 RPM High 6,000 RPM
Cutting Width	13" (33 cm)
Overall Length	70" (177.5 cm)
Net Weight	6.2 lbs (2.8 kg)

- 2pc quick release system shortens overall length from 70" to 39.5" for easy transportation
- 2pc line trimmer operates independently from Makita split shaft attachments
- Includes bump and feed trimmer head with 0.080" twisted quiet line
- 3-speed options (Low: 3,500 RPM, Medium: 5,100 RPM, High: 6,000 RPM) for active power management
- Tool-less release system for quick disconnect of line trimmer into 2 pcs



DUR190LZX3 (Tool Only)  
**18V LXT 13" Line Trimmer (Loop Handle)**

**BL MOTOR XPT AFT ADT**

Battery Capacities	18V LXT
No Load Speed:	
Low	3,500 RPM
Medium	5,100 RPM
High	6,000 RPM
Cutting Width	13" (33 cm)
Overall Length	72.25" (183.6 cm)
Net Weight	6.4 lbs (2.9 kg)

- **Designed for use in residential and public spaces offering low noise levels**
- Includes bump and feed trimmer head with 0.080" twisted quiet line
- 3-speed options (Low: 3,500 RPM, Medium: 5,100 RPM, High: 6,000 RPM) for active power management
- Front mounted operator controls for easy access and quick adjustments
- Reverse mode for clearing entangled debris from the cutting head



DUR192LST1 / DUR192LFX7  
 DUR192LZX1 (Tool Only)  
**18V LXT 13" Line Trimmer (Loop Handle)**

**BL MOTOR XPT**

Battery Capacities	18V LXT
No Load Speed:	
Low	4,500 RPM
High	6,000 RPM
Cutting Width	13" (33 cm)
Overall Length	65-3/4" (167 cm)
Net Weight	5.1 lbs (2.3 kg)

- **Lightweight and powerful with low noise level suitable for use in residential areas and public spaces**
- Includes bump and feed trimmer head with 0.080" twisted quiet line
- 2-speed options (Low: 4,500 RPM, High: 6,000 RPM) for active power management
- DUR192LST1 includes: One 18V LXT Battery (5.0Ah) & Standard Charger
- DUR192LFX7 includes: One 18V LXT Battery (3.0Ah) & Standard Charger



DUR189Z (Tool Only)  
**18V LXT 11-3/4" Line Trimmer (Loop Handle)**

**BL MOTOR XPT**

Battery Capacities	18V LXT
No Load Speed:	
Low	4,000 RPM
Medium	5,000 RPM
High	6,000 RPM
Cutting Width	11-3/4" (30 cm)
Overall Length	63-1/2" (161 cm)
Net Weight	5.8 lbs (2.6 kg)

- **Lightweight and powerful with low noise level suitable for use in residential areas and public spaces**
- 3 speed options (Low: 4,000 RPM, Medium: 5,000 RPM, High: 6,000 RPM) for power management
- 11-3/4" cutting width and light weight for reduced operator fatigue
- Front mounted operator controls for easy function changes during use
- Reverse switch for clearing entangled weeds and grass from cutting head



DUR193M001  
 DUR193Z (Tool Only)  
**18V LXT 10-1/4" Line Trimmer**

**XPT**

Battery Capacities	18V LXT
No Load Speed	7,800 RPM
Cutting Width	10-1/4" (26 cm)
Overall Length	47-1/4" - 54-1/2" (119 - 138 cm)
Net Weight	4.2 lbs (1.9 kg)

- **Well balanced design with fully adjustable features to suit any operator**
- Adjustable trimmer head features 5 angled cutting positions (0°, 15°, 30°, 45°, 60°) for maximum versatility and ease of operation when trimming around obstacles. Trimmer head rotates 180° to enable easy edge trimming.
- Telescopic shaft with lever release adjusts quickly and easily
- DUR193M001 includes: One 18V LXT Battery (4.0Ah) & Charger



UR100DZX (Tool Only)  
**12V max CXT Li-Ion 9" Nylon Blade Trimmer**

**CXT XPT**

Battery Capacities	12V max CXT Li-Ion
No Load Speed	10,000 RPM
Cutting Width	9" (23 cm)
Overall Length	46-3/4" (118.5 cm)
Net Weight	4.3 lbs (1.73 kg)

- **Well balanced design with fully adjustable features to suit any operator**
- Adjustable front grip features 6 angled positions for maximum versatility and ease of operation when trimming on slopes or while using as an edger
- Telescopic shaft adjusts quickly and easily to suit any operator (33-1/2" to 47-1/4")
- Standard equipped with 9" nylon blade cutting head (optional nylon trimmer line head 10-1/4" available)



**Line Trimmer Shoulder Straps & Harnesses**

Description	For Model No.	Part No.
Shoulder Strap	DUR189, DUR365, DUR368 DUX60, UR100	125516-5
Shoulder Harness	Fits All Makita Cordless Line Trimmers	196129-9

**Makita Trimmer Line**

Style	Diameter	Colour	Loop	1/2 Pound	1 Pound	3 Pound
Round	0.065"		T-03327	T-03333	-	-
	0.080"		T-03349	T-03355	T-03361	-
	0.095"		T-03383	T-03399	T-03408	T-03414
	0.105"		-	T-03436	T-03442	T-03458
Ultra	0.065"		T-03539	T-03545	-	-
	0.080"		T-03551	T-03567	T-03573	-
	0.095"		T-03589	T-03595	T-03604	T-03610
	0.105"		-	T-03626	T-03632	T-03648



**Professional Line Trimmer Heads**

Part No.	Description	Line Diameter	Line Trimmer Type	Trimmer Spindle Direction
T-03187	Medium Swift Load Line Trimmer Head	0.080" - 0.105"	Curved Shaft	RH
T-03676	Medium Swift Load Line Trimmer Head	0.080" - 0.105"	Straight Shaft	LH
T-03660	Universal Swift Load Pro Line Trimmer Head	0.095" - 0.130"	Straight Shaft	Universal
T-03682	Universal Quick Load Line Trimmer Head	0.080" - 0.130"	Straight or Curved Shaft	Universal



**Line Trimmer Heads**

Part No.	Feed System	Spindle Direction	LH	LH	RH	LH							
198385-7	Bump Feed	M8x1.25 LH		•									
195858-1		-	•										
197296-3		M10x1.25 LH				•		•					
198892-0										•			
195149-0													
191D89-4						•							
198972-2		M8x1.25 RH											
197286-3		-									•	•	
191R00-0		-											•



UB001

**MAKITA**  
**CONNECTX™**  
run-time and power solution

**CONNECTX™**



UB001CZ (Tool Only)  
**ConnectX™ Turbo Blower**

**BL MOTOR XPT**

- **Powerful performance delivers up to 622 CFM and 157 MPH of power**
- Torque boost mode delivers extra power when required from 530 CFM (112 MPH) to 622 CFM (157 MPH)
- Cruise control lever allows you to lock the variable speed trigger to a desired power level
- Integrated 3-stage telescopic nozzle up to 4"
- Powered by connecting to Makita's Portable Power Pack PDC01 or Makita's ConnectX™ 1,200Wh Portable Backpack Power Supply PDC1200A02 (Both Sold Separately)

Battery Capacities:	Portable Power Pack (PDC01) ConnectX™ Portable Backpack Power Supply (PDC1200A02)
Maximum Air Volume	622 CFM (17.6 m³/min)
Maximum Air Velocity	157 MPH (70 m/sec)
No Load Speed	24,000 RPM
Overall Length	41-3/4" (106 cm)
Net Weight	5.7 lbs (2.6 kg)

**CONNECTX™**



**NEW**

UB002CZ (Tool Only)  
**ConnectX™**  
**Backpack Blower**

**BL MOTOR XPT**

Battery Capacity	ConnectX™ Portable Backpack Power Supply (PDC1200A02)
Maximum Air Volume	0 - 671 CFM (0 - 19 m³/min)
Maximum Air Velocity	0 - 160 MPH (0 - 71.7 m/sec) - max
No Load Speed	0 - 22,000 RPM
Overall Length	54" (136.8 cm)
Net Weight	15.8 lbs (7.1 kg)

- **Makita's first ConnectX™ Backpack Blower**
- Power and performance equivalent to 50cc engine Backpack Blower
- Cruise control lever allows operator to lock the variable speed trigger at the required power level
- Battery fuel gauge with 3 LED indicators allows operator to easily monitor current power level
- Use ONLY with Makita's ConnectX™ 1,200Wh Portable Backpack Power Supply PDC1200A02 (Sold Separately)

**XGT 40V | 80V max**



UB001GM101  
UB001GZ (Tool Only)  
**40V max XGT Turbo Blower**

**BL MOTOR**

Battery Capacities	40V max XGT
Maximum Air Volume	0 - 565 CFM (0 - 16.0 m³/min)
Maximum Air Velocity	0 - 143 MPH (64.0 m/sec)
No Load Speed:	
Boost Mode	0 - 22,000 RPM
Cruise Control Mode	0 - 20,000 RPM
Overall Length	33-1/2" - 37-1/2" (85 - 95 cm)
Net Weight	5.67 lbs (2.57 kg)

- **Up to 565 CFM at 143 MPH in Boost Mode**
- Variable speed control by dial with cruise control trigger for optimal air volume and velocity with reduced operator strain
- Boost mode provides added force for blowing heavy or wet materials
- 3-stage telescopic long nozzle
- Best grip to frame angle provides optimum nozzle to ground angle for efficient sweeping operation
- **UB001GM101 includes: One 40V max XGT Battery (4.0Ah) & Rapid Charger**

**18V + 18V → 36V**  
**LXT**



DUB363ZV (Tool Only)  
**36V (18Vx2) LXT**  
**Blower / Vacuum**

**BL MOTOR XPT**

Battery Capacities	Two 18V Li-Ion
Maximum Air Volume	473 CFM (13.4 m³/min)
Maximum Air Velocity	145 MPH (65 m/sec)
No Load Speed	0 - 7,850 RPM
Overall Length	28-3/4", 31", 33" (73.7, 78.6, 83.6 cm) w/Long Nozzle 55" (139.6 cm) w/Vacuum Nozzle
Net Weight	11.7 lbs (5.3 kg)

- **860 watt (1.2 HP) Brushless Motor delivers up to 473 CFM and 120 MPH (145 MAX) air speed**
- Our most powerful 3-in-1 handheld Blower
- 3-tools-in-1: Vacuum, Mulcher and Blower for convenient clean-up
- Commercial design for heavy duty applications
- 10:1 mulch ratio reduces 10 bags of leaves down to 1 bag of leaves

**18V + 18V → 36V**  
**LXT**



DUB362PT2  
DUB362Z (Tool Only)  
**36V (18Vx2) LXT**  
**Turbo Blower**

**BL MOTOR XPT**

Battery Capacities	Two 18V LXT
Maximum Air Volume	473 CFM (13.4 m³/min)
Maximum Air Velocity	120 MPH (54 m/sec)
No Load Speed	22,000 RPM
Overall Length	32-3/4", 34-3/4", 36-5/8" (83, 88, 93 cm)
Net Weight	6.0 lbs (2.7 kg)

- **Amazing 120 MPH and 473 CFM operation**
- Powered by two 18V Li-Ion batteries in series to supply energy to the powerful 36V DC motor drive system
- 6-stage air volume / velocity settings by dial with variable speed control by trigger
- 3-stage telescopic long nozzle with adjustment range of 4" (100 mm)
- **DUB362PT2 includes: Two 18V LXT Batteries (5.0Ah) & Dual Port Rapid Charger**

**18V LITHIUM-ION**  
**LXT**



DUB184Z (Tool Only)  
**18V LXT**  
**Turbo Blower**

**BL MOTOR XPT**

Battery Capacities	18V LXT
Maximum Air Volume	459 CFM (13 m³/min)
Maximum Air Velocity	116 MPH (52 m/sec)
No Load Speed	0 - 18,000 RPM
Overall Length	32-1/2" (82.5 cm)
Net Weight	4.7 lbs (2.1 kg)

- **Amazing 116 MPH and 459 CFM operation**
- Powered by one 18V Li-Ion battery to supply energy to the powerful 18V DC motor drive system
- Variable speed control by trigger and cruise control lever
- The trigger also has a lock on function, with button operable from either side of handle
- Best grip to frame angle provides optimum nozzle to ground angle for efficient sweeping operation

**18V + 18V → 36V**  
**LXT**



DUB361Z (Tool Only)  
**36V (18Vx2) LXT Blower**

**XPT**

Battery Capacities	Two 18V LXT
Maximum Air Volume:	
High	155 CFM (4.4 m³/min)
Low	92 CFM (2.6 m³/min)
Maximum Air Velocity:	
High	208 MPH (93 m/sec)
Low	128 MPH (57 m/sec)
No Load Speed:	
High	17,000 RPM
Low	10,000 RPM
Overall Length	35-5/8" (90.5 cm)
Net Weight	4.2 lbs (1.9 kg)

- **More power from Makita's 36V (18Vx2) LXT battery platform**
- Battery capacity warning light indicates ideal time to recharge battery
- Low noise level suitable for use in residential areas and public spaces
- Push button air volume selection (low / high settings)
- Long blowing nozzle with curved tip for optimal blowing performance



DUB185Z (Tool Only)  
**18V LXT**  
**Blower / Vacuum**

**BL MOTOR XPT ADT**

Battery Capacities	18V LXT
Maximum Air Volume	113 CFM (3.2 m <sup>3</sup> /min)
Maximum Air Velocity	219 MPH (98 m/sec)
Maximum Air Pressure	5.8 kpa (59 cm H <sub>2</sub> O)
No Load Speed	0 - 18,000 RPM
Overall Length	20-3/8" (51.7 cm)
Net Weight	2.9 lbs (1.3 kg)

- **Increased max. air volume, air speed and sealed suction for improved performance and efficiency**
- High / medium / low speed settings with variable speed trigger allows operator to use the precise amount of air for the application
- Converts quickly and easily to a vacuum using vacuum bag part no. 123241-2
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation
- Use with Long Garden Nozzle 191G09-6 for easy operation while standing



DUB186SF  
 DUB186Z (Tool Only)  
**18V LXT Blower / Sweeper**

**XPT**

Battery Capacities	Two 18V LXT
Maximum Air Volume	113 CFM (3.2 m <sup>3</sup> /min)
Maximum Air Velocity	152 MPH (68 m/sec)
No Load Speed	0 - 18,000 RPM
Overall Length	34" (86.1 cm)
Net Weight	3.1 lbs (1.4 kg)

- **POWERFUL PERFORMANCE delivers up to 113 CFM and 152 MPH**
- Unique extended nozzle design for optimum operation directs leaves etc. from driveways, sidewalks and more.
- Low / Medium / High air volume Settings with variable speed control within each setting
- Converts to Vacuum quickly and easily. Use with optional dust bag 122814-8.
- Light weight design for reduced operator fatigue
- **DUB186SF includes: One 18V LXT Battery (3.0Ah) & Standard Charger**



DUB183SF (w/Long Nozzle)  
 DUB182Z (w/Short Nozzle)(Tool Only)  
**18V LXT Blowers / Vacuums**

Battery Capacities	18V LXT
Maximum Air Volume	92 CFM (2.6 m <sup>3</sup> /min)
Maximum Air Velocity:	
w/Long Nozzle	116 MPH (52 m/sec)
w/Short Nozzle	179 MPH (80 m/sec)
No Load Speed	0 - 18,000 RPM
Overall Length:	
w/Long Nozzle	33-1/4" (84.5 cm)
w/Short Nozzle	20-3/4" (52.5 cm)
Net Weight:	
w/Long Nozzle	4.3 lbs (1.9 kg)
w/Short Nozzle	2.9 lbs (1.3 kg)

- **Unique extended nozzle design for optimum operation directs air flow angle for blowing and sweeping debris, grass clipping, leaves etc. from driveways, sidewalks and more**
- Low / medium / high air volume settings with variable speed control within each setting
- **DUB183SF includes: One 18V LXT Battery (3.0Ah) & Standard Charger**

Optional Garden Nozzle Sold Separately (Part No. 191G09-6)



UB101DZ (w/Long Nozzle)  
 UB100DZ (w/Short Nozzle)  
 (Tools Only)  
**12V max CXT Li-Ion**  
**Blowers / Vacuums**

**CXT**

Battery Capacities	12V max CXT Li-Ion
Maximum Air Volume	92 CFM (2.6 m <sup>3</sup> /min)
Maximum Air Velocity:	
w/Long Nozzle	125 MPH (56 m/sec)
w/Short Nozzle	168 MPH (75 m/sec)
No Load Speed	0 - 15,800 RPM
Overall Length:	
w/Long Nozzle	33-1/2" (84.9 cm)
w/Short Nozzle	19-7/8" (50.5 cm)
Net Weight:	
w/Long Nozzle	2.8 lbs (1.3 kg)
w/Short Nozzle	2.7 lbs (1.2 kg)

- **Lightweight and compact design for easy handling**
- Large air outlet for increased air flow output and velocity
- Variable 3-speed trigger for precise amount of air flow within each setting
- Extended nozzle design directs air flow angle for blowing and sweeping debris on driveways and more (UB101DZ Only)

Cordless Blower Accessories	Description	For Model No.	Part No.
	Original Long Blower Nozzle	DUB362	455915-0
	11" Extension Nozzle	DUB362	197888-8
	11" Flat Nozzle	DUB362	197889-6
	Original Long Blower Nozzle	DUB361	452123-4
	21" Long Curved Nozzle	DUB182 DUB183	TP00000199
	Extension Adapter Required for DUB184 to accept 11" Flat Nozzle or 11" Extension Nozzle	DUB184	191L13-5

Cordless Blower Shoulder Straps	
For Model No.	Part No.
	166094-6
	166095-4
DUB361Z	166095-4
DUB362Z	166094-6

**Cordless Blower Gutter Nozzle Accessories**



**Up To 13' (4 M) Maximum Reach**

Description	For Model No.	Gutter Nozzle Kit Includes:	Part No.
Gutter Nozzle Kit	DUB184 (use with 191L13-5 Nozzle Adapter)	Extension Pipes (3), Nozzle Adapter (1) Rotatable Pipe (1), Metal Bands (2)	191B03-8
	DUB362 / DUB363 (use with 191J13-3 Nozzle Adapter)		
	UB400MP (use with 191C15-7 Nozzle Adapter)		
	UB001G / C (use with 191L96-5 Nozzle Adapter)		

DUN500



DUN600



## 3 SPEED OPTIONS

(Low: 2,000 SPM, Medium: 3,600 SPM, High: 4,400 SPM) for power management



DUN600LZ (Tool Only)  
18V LXT Pole Hedge Trimmer



- Up to 75 minutes of run time with 18V (5.0Ah) LXT Battery (Battery not included)
- Brushless motor delivers up to 4,400 SPM for faster cutting
- 3 speed options (Low: 2,000 SPM, Medium: 3,600 SPM, High: 4,400 SPM)
- Reverse function to help free the blade in case it becomes jammed
- Optimum curved blades with 3 sharpened edges are designed to easily catch and hold twigs



Battery Capacities	18V LXT
Strokes Per Minute (min <sup>-1</sup> ):	
Low	2,000 SPM
Medium	3,600 SPM
High	4,400 SPM
Cutting Length	23-5/8" (60 cm)
Overall Length	80-1/2" (205 cm)
Net Weight	7.5 lb (3.4 kg)



DUN500WZ (Tool Only)  
18V LXT Articulating Pole Hedge Trimmer



Battery Capacities	18V LXT
Strokes Per Minute (min <sup>-1</sup> ):	
Low	2,000 SPM
Medium	3,600 SPM
High	4,400 SPM
Cutting Length	19-3/4" (50 cm)
Overall Length	83-1/4" (211.5 cm)
Net Weight	8.0 lbs (3.6 kg)

- Up to 80 minutes of run time with 18V (5.0Ah) LXT Battery (Battery not included)
- Brushless motor delivers up to 4,400 SPM for faster cutting
- 3 speed options (Low: 2,000 SPM, Medium: 3,600 SPM, High: 4,400 SPM) for power management
- Reverse function to help free the blade in case it becomes jammed
- Optimum curved blades with 3 sharpened edges are designed to easily catch and hold twigs



DUN461WSF  
DUN461WZ (Tool Only)  
18V LXT Telescopic Pole Hedge Trimmer



Battery Capacities	18V LXT
Strokes Per Minute (min <sup>-1</sup> ):	3,600 SPM
Cutting Length	18-1/8" (46 cm)
Overall Length	99" (251.1 cm)
Net Weight	5.8 lbs (2.6 kg)

- Telescopic design provides up to 99" of reach
- Toolless locking lever allows operator to easily adjust extension length with no additional tools
- Hedge trimmer head can be adjusted every 15" to match the application
- Slide type front grip is easily adjusted for operator comfort for maximum work efficiency in different working postures
- DUN461WSF includes: One 18V LXT Battery (3.0Ah) & Standard Charger



UH005GZ (Tool Only)  
40V max XGT  
30" Hedge Trimmer



Battery Capacities	40V max XGT
Strokes Per Minute (min <sup>-1</sup> ):	
Low	2,000 SPM
Medium	3,600 SPM
High	5,000 SPM
Cutting Length	30" (75 cm)
Maximum Cutting Thickness	15/16" (2.35 cm)
Overall Length	49-3/4" (126.3 cm)
Net Weight	8.4 lbs (3.78 kg)

- Features sharp curved edge blade for trimming thin branches up to 15/16"
- Sharp curved edge blade features inclined / curved tooth to easily catch and hold branches with reduced friction resistance
- 3-speed range enables operator to adjust cutting speed based on materials or application
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- 5 position rotating rear handle with positive stops at 0°, 45° and 90° enables optimal positioning when cutting



DUH751RTE  
DUH751Z (Tool Only)  
18V LXT 30" Hedge Trimmer



Battery Capacities	18V LXT
Strokes Per Minute (min <sup>-1</sup> ):	0 - 2,000 / 0 - 3,600 / 0-4,400 SPM
Cutting Length	29-1/2" (75 cm)
Maximum Cutting Thickness	15/16" (2.35 cm)
Overall Length	49-1/2" (126.1 cm)
Net Weight	8.4 lbs (3.8 kg)

- 5 Position rotating rear handle with positive stops at 0, 45 and 90 degrees
- 3-speed push button control with variable trigger for precise amount of power within each setting
- Anti-vibration design (five cushions within the housing) for operator comfort
- Two stage safety switch system prevents accidental start up
- Low noise level at only 93 dB(A) for operator comfort
- LED display indicators allows monitoring of power level
- DUH751RTE includes: Two 18V LXT Batteries (5.0Ah) & Rapid Charger

18V → 18V → 36V  
**LXT**



DUH651Z (Tool Only)  
**36V (18Vx2) LXT**  
**25-1/2" Hedge Trimmer**

**XPT**

Battery Capacities	Two 18V LXT
Strokes Per Minute (min <sup>-1</sup> )	1,000 - 1,800 SPM
Cutting Length	25-1/2" (65 cm)
Maximum Cutting Thickness	1 1/16" (1.8 cm)
Overall Length	48-1/2" (123.3 cm)
Net Weight	8.9 lbs (4.0 kg)

- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Battery capacity warning light indicates approximate remaining battery power
- 5 position rotating rear handle with positive stops at 0°, 45° and 90° enables optimal positioning when cutting vertical or angled hedges
- Variable speed dial enables operator to adjust cutting speed based on materials or application

**XGT** 40V | 80V max



UH004GZ (Tool Only)  
**40V max XGT**  
**24" Hedge Trimmer**

**BL MOTOR**

Battery Capacities	40V max XGT
Strokes Per Minute (min <sup>-1</sup> )	
Low	2,000 SPM
Medium	3,600 SPM
High	5,000 SPM
Cutting Length	24" (60 cm)
Maximum Cutting Thickness	15/16" (2.35 cm)
Overall Length	44" (112 cm)
Net Weight	7.9 lbs (3.58 kg)

- Features sharp curved edge blade for trimming thin branches up to 15/16"
- Sharp curved edge blade features inclined / curved tooth to easily catch and hold branches with reduced friction resistance
- 3-speed range enables operator to adjust cutting speed based on materials or application
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- 5 position rotating rear handle with positive stops at 0°, 45° and 90° enables optimal positioning when cutting

**XGT** 40V | 80V max



UH008GZ (Tool Only)  
**40V max XGT**  
**24" Hedge Trimmer**

**BL MOTOR**

Battery Capacities	40V max XGT
Strokes Per Minute (min <sup>-1</sup> )	
Low	2,000 SPM
Medium	3,600 SPM
High	5,000 SPM
Cutting Length	24" (60 cm)
Maximum Cutting Thickness	7/8" (2.15 cm)
Overall Length	44" (112 cm)
Net Weight	7.9 lbs (3.58 kg)

- Use with optional Chip Receiver (191R1-3) for easy leaf, twig and debris collection
- Features standard blade for trimming thin branches up to 7/8"
- Standard blade with dual cutting action cuts quickly with shearing effect
- 3-speed range enables operator to adjust cutting speed based on materials or application
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- 5 position rotating rear handle with positive stops at 0°, 45° and 90° enables optimal positioning when cutting

**XGT** 40V | 80V max



UH006GZ (Tool Only)  
**40V max XGT**  
**24" Hedge Trimmer**

**BL MOTOR**

Battery Capacities	40V max XGT
Strokes Per Minute (min <sup>-1</sup> )	
Low	2,000 SPM
Medium	3,000 SPM
High	4,000 SPM
Cutting Length	24" (60 cm)
Maximum Cutting Thickness	1" (2.5 cm)
Overall Length	44-1/4" (112.3 cm)
Net Weight	8.1 lbs (3.67 kg)

- Use with optional Chip Receiver (191R51-3) for easy leaf, twig and debris collection
- Features sharp edge blade for rough cutting of thick branches up to 1"
- Sharp edge blade features inclined / curved tooth to easily catch and hold branches
- 3-speed range enables operator to adjust cutting speed based on materials or application
- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- 5 position rotating rear handle with positive stops at 0°, 45° and 90° enables optimal positioning when cutting

18V  
LITHIUM-ION  
**LXT**



DUH602RTE  
DUH602Z (Tool Only)  
**18V LXT 24" Hedge Trimmer**

**BL XPT**

Battery Capacities	18V LXT
Strokes Per Minute (min <sup>-1</sup> ):	
Low	2,000 SPM
Medium	3,600 SPM
High	4,400 SPM
Cutting Length	24" (60 cm)
Maximum Cutting Thickness	7/8" (2.15 cm)
Overall Length	43-3/4" (111.3 cm)
Net Weight	7.8 lbs (3.5 kg)

- Electric brake stops blade 3-5 seconds after trigger is released for increased operator safety
- Battery capacity warning light indicates approximate remaining battery power
- 5 position rotating rear handle with positive stops at 0°, 45° and 90° enables optimal positioning when cutting vertical or angled hedges
- DUH602RTE includes: Two 18V LXT Batteries (5.0Ah) & Rapid Charger

18V  
LITHIUM-ION  
**LXT**



DUH523Z (Tool Only)  
**18V LXT**  
**22" Hedge Trimmer**

Battery Capacities	18V LXT
Strokes Per Minute (min <sup>-1</sup> )	1,350 SPM
Cutting Length	22" (56 cm)
Maximum Cutting Thickness	15/32" (1.2 cm)
Overall Length	38" (96.3 cm)
Net Weight	6.0 lbs (2.7 kg)

- Designed for maximum versatility and ease of operation
- Battery protection system provides over-discharge, temperature and current protection for enhanced performance, battery cycle life and overall battery life
- Anti-vibration structure features five cushions linking handle and motor sections for significantly reduced vibration transmission to operator

18V  
LITHIUM-ION  
**LXT**



DUM604Z (Tool Only)  
**18V LXT 6" Grass Shear**

Optional Hedge Trimmer Attachments for DUM604Z

 Hedge Trimmer Blades 195178-3  
Hedge Trimmer Cover 195274-7

Battery Capacities	18V LXT
No Load Speed	2,500 SPM
Cutting Width	6" (16 cm)
Depth Adjustment	5/8" / 13/16" / 1" (1.5 cm / 2 cm / 2.5 cm)
Overall Length	13-7/8" (35.3 cm)
Net Weight	2.5 lbs (1.1 kg)

- Compact design for added versatility
- Dual blade action cuts quickly with shearing effect
- Non-electrolyzed nickel plated blades reduce staining and rusting
- Grass catcher enables quick and easy depth adjustment
- Tool-less blade changing system enables simple and easy blade changes

18V  
LITHIUM-ION  
**LXT**



DUM604ZX  
(w/Hedge Trimmer Attachment)  
(Tool Only)  
**18V LXT**  
**6" Grass Shear**

Battery Capacities	18V LXT
No Load Speed	2,500 SPM
Cutting Width	6" (16 cm)
Depth Adjustment	5/8" / 13/16" / 1" (1.5 cm / 2 cm / 2.5 cm)
Overall Length	13-7/8" (35.3 cm)
Net Weight	2.5 lbs (1.1 kg)

- Compact design for added versatility
- Includes 195178-3 Hedge Trimmer Attachment
- Dual blade action cuts quickly with shearing effect
- Non-electrolyzed nickel plated blades reduce staining and rusting
- Grass catcher enables quick and easy depth adjustment
- Tool-less blade changing system enables simple and easy blade changes



UM600DZ (Tool Only)  
**12V max CXT Li-Ion  
6" Grass Shear**

Optional Hedge Trimmer Attachments for UM600DZ

-  Hedge Trimmer Blades 198409-9
-  Chip Receiver Set 198402-3
-  Hedge Trimmer Cover 195274-7



Battery Capacities	12V max CXT Li-Ion
No Load Speed	2,500 SPM
Cutting Width	6" (16 cm)
Depth Adjustment	5/8" / 13/16" / 1" (1.5 cm / 2 cm / 2.5 cm)
Overall Length	13-5/8" (34.7 cm)
Net Weight	2.5 lbs (1.1 kg)

- **Compact design for added versatility**
- Dual blade action cuts quickly with shearing effect
- Non-electrolyzed nickel plated blades reduce staining and rusting
- Grass catcher enables quick and easy depth adjustment
- Tool-less blade changing system enables simple and easy blade changes



MU01Z (12V max (1.3 Ah) Pod)  
(Tool Only)  
**12V Li-Ion  
6" Grass Shear**

Optional Hedge Trimmer Attachments for MU01Z

-  Hedge Trimmer Blades 195178-3
-  Chip Receiver Set 195278-9
-  Hedge Trimmer Cover 195274-7

Battery Capacities	12V max (1.3 Ah) Li-Ion
No Load Speed	1,250 SPM
Cutting Width	6" (16 cm)
Depth Adjustment	3/8" / 9/16" / 1" (1 cm / 1.5 cm / 2.5 cm)
Overall Length	11-1/2" (29.2 cm)
Net Weight	2.0 lbs (0.9 kg)

- **Compact design for added versatility**
- Dual blade action cuts quickly with shearing effect
- Non-electrolyzed nickel plated blades reduce staining and rusting
- Wire toboggan style base frame enables quick and easy depth adjustment
- Battery capacity warning light indicates low battery capacity

Cordless Grass Shear Accessories	Description	For Model No. DUM604Z UM600DZ	For Model No. DUM168Z MU01Z
	Hedge Trimmer Blade • Quick and Easy Installation • Double-sided for efficient dual cutting action • Non-electrolyzed nickel plated blades engineered to resist staining and rusting	198409-9	195178-3
	Chip Receiver • Easy one-touch installation and removal • For efficient collection and clean-up of clippings • Attaches to either side of the blade	198402-3	195278-9
	Blade Cover • Slip on blade cover for protection while stored or transported	195274-7	
	Extension Handle • Allows the Grass Shear to be used comfortably in a standing position • Quick and easy installation • 5 stage angle adjustment	198486-1	

Cordless Hedge Trimmer Accessories		
Blade Cover Part No.	Chip Receiver Part No.	For Models
195274-7	198402-3	UH201DZ
450490-1	194681-1	DUH651Z
453723-3	195050-9	DUH523Z



DUS158RF  
DUS158Z (Tool Only)  
**18V LXT 15L Backpack Sprayer**



Battery Capacities	18V LXT
Tank Capacity	15L
Hose Length	1.7 m (67")
Maximum Working Pressure	0.5 Mpa
Spray Wand Length	23-5/8" (0.6 m)
Nozzle Mounting Thread	G 1/4"
Dimensions (L x W x H)	12-1/2" x 9-3/8" x 20-3/8" (31.7 cm x 23.7 cm x 51.7 cm)
Net Weight	12.2 lbs (5.5 kg)

- **Maximum cordless spraying maneuverability**
- Curved tank design with padded harness and ventilated back pad rests comfortably against operator
- 23-5/8" spray wand • I-shaped double-headed nozzle with adjustable rate of flow for narrow spraying or herbicide nozzle for wide angle spraying
- Large paddle switch with lock-on button for easy continuous spraying
- DUS158RF includes: One 18V LXT Battery (3.0Ah) & Rapid Charger



DUS108Z (Tool Only)  
**18V LXT 10L Backpack Sprayer**



Battery Capacities	18V LXT
Tank Capacity	10L
Hose Length	1.7 m (67")
Maximum Working Pressure	0.5 Mpa
Spray Wand Length	23-5/8" (0.6 m)
Nozzle Mounting Thread	G 1/4"
Dimensions (L x W x H)	12-1/2" x 9-3/8" x 17-1/4" (31.7 cm x 23.7 cm x 43.7 cm)
Net Weight	11.5 lbs (5.2 kg)

- **Adjustable rate of flow, telescopic wand, lock-on feature**
- Curved tank design rests comfortable against operator when carried over the shoulder
- Telescopic spray wand adjusts between 19" and 27" overall length
- H-shaped double-headed nozzle with adjustable rate of flow for narrow or wide angle spraying
- Large paddle switch with lock-on button for easy continuous spraying
- DUS054RF includes: One 18V LXT Battery (3.0Ah) & Rapid Charger



DUS054RF  
DUS054Z (Tool Only)  
**18V LXT 5L Sprayer**



Battery Capacities	18V LXT
Tank Capacity	5L
Hose Length	1.7 m (67")
Maximum Working Pressure	0.3 Mpa
Spray Wand Length	19-3/4" - 27-1/2" (0.5 - 0.7 m)
Nozzle Mounting Thread	G 1/4"
Dimensions (L x W x H)	13-1/2" x 7-1/8" x 14-1/2" (34.3 cm x 18.2 cm x 36.8 cm)
Net Weight	6.2 lbs (2.8 kg)

- **Adjustable rate of flow, telescopic wand, lock-on feature**
- Curved tank design rests comfortable against operator when carried over the shoulder
- Telescopic spray wand adjusts between 19" and 27" overall length
- H-shaped double-headed nozzle with adjustable rate of flow for narrow or wide angle spraying
- Large paddle switch with lock-on button for easy continuous spraying
- DUS054RF includes: One 18V LXT Battery (3.0Ah) & Rapid Charger



US053DZ (Tool Only)  
**12V max CXT Li-Ion 5L Sprayer**



Battery Capacities	12V max CXT Li-Ion
Tank Capacity	5L
Hose Length	1.7 m (67")
Maximum Working Pressure	0.3 Mpa
Spray Wand Length	19-3/4" - 27-1/2" (0.5 - 0.7 m)
Nozzle Mounting Thread	G 1/4"
Dimensions (L x W x H)	13-1/2" x 7-1/8" x 13-1/2" (34.3 cm x 18.2 cm x 34.3 cm)
Net Weight	5.1 lbs (2.3 kg)

- **Adjustable rate of flow, telescopic wand, lock-on feature**
- Curved tank design rests comfortable against operator when carried over the shoulder
- Telescopic spray wand adjusts between 19" and 27" overall length
- H-shaped double-headed nozzle with adjustable rate of flow for narrow or wide angle spraying
- Large paddle switch with lock-on button for easy continuous spraying
- DUS054RF includes: One 18V LXT Battery (3.0Ah) & Rapid Charger



DG001



DDA460

# AC POWER – CORDLESS VERSATILITY



**XGT** 40V | 80V max

DG001GM105  
 DG001GZ05 (Tool Only)  
**40V max XGT 1/2" Earth Auger**

**BL XPT ADT**

Battery Capacities	40V max XGT
Drilling Capacities:	
For Sandy Soil	5-7/8" (ø200 mm)
For Clay Soil	7-7/8" (ø150 mm)
No Load Speed	0 - 400 / 0 - 1,500 RPM
Overall Length	33-1/4" (84.2 cm)
Net Weight	14.4 lbs (6.5 kg)

**Includes earth auger handle attachment with bracing bar and bit adapters for use with Makita earth auger drill bits**

- Torque limiter stops bit rotation if bit jams for increased operator safety and tool protection
- Soft start feature gradually increases speed to eliminate start up shock
- Variable speed trigger allows operator to adjust speed based on materials or application
- Dual LED job light with pre-glow and after-glow features illuminates work area
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation
- Includes D style side handle
- **DG001GM105 includes: One 40V max XGT Battery (4.0Ah) & Rapid Charger**

Auger Drill Bits									
Type	Diameter	Auger Part No.	Replacement Blade Part No.	Replacement Retention Pin Part No.	7/16" Hex Shank Auger Bit Adapters	21-1/4" Extension Bar Part No.	Auger Handle Attachment Part No.	For Model(s)	
<b>Earth Auger Drill Bits</b>									E-07347
Earth Auger Drill Bits	4"	E-07347*	E-07668	E-07381	327687-6 (Makita Bit Adapter) 327684-2 (Stihl† Bit Adapter)	E-07375	191P11-3	DG001G DDA460	
	6"	E-07353*	E-07674						
	8"	E-07369*	E-07680						
<b>Ice Auger Drill Bit</b>									E-12778
Ice Auger Drill Bit	6"	E-12778*	E-12784	E-07381	-	E-07375	191P11-3	DG001G DDA460	

\*Includes Retention Pin / †Stihl is a registered trademark of Andreas Stihl AG & Co. KG



UC012

# WET GUARD WITH IPX4 RATING

offers maximum protection in wet environments

**XGT** 40V | 80V max



**NEW**

UC016GT101  
UC016GZ (Tool Only)  
**40V max XGT**  
**16" Rear Handle Chainsaw**



Battery Capacities	40V max XGT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	0.325" / 43G
Chain Speed	0 - 5,020 FPM (0 - 1,530 m/min)
Overall Length	17-1/2" (44.5 cm)
Net Weight	9.9 lbs (4.5 kg)

- **High speed performance, variable speed (0 - 5,020 feet per minute). Power equivalent to a 42cc gasoline Chainsaw.**
- Low noise level at only 104 dB(A) with zero emissions for operator comfort and reduced environmental impact
- Tool-less bar mounting and chain tension adjustment for quick and easy set up and adjustment on the jobsite
- Automatic chain oiler maintains optimal bar/chain lubrication during operation with no adjustments required
- UC016GT101 includes: One 40V max XGT Battery (5.0Ah) & Rapid Charger

**XGT** 40V | 80V max



**NEW**

UC012GZ (Tool Only)  
**40V max XGT**  
**16" Rear Handle Chainsaw**



Battery Capacities	40V max XGT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	0.325" / 43G
Chain Speed	0 - 5,020 FPM (0 - 1,530 m/min)
Overall Length	17-1/2" (44.5 cm)
Net Weight	9.9 lbs (4.5 kg)

- **High speed performance, variable speed (0 - 5,020 feet per minute). Power equivalent to a 42cc gasoline Chainsaw.**
- Low noise level at only 104 dB(A) with zero emissions for operator comfort and reduced environmental impact
- Captive nuts: prevent loss of nut when removing sprocket cover to replace guide bar or saw chain
- Automatic chain oiler maintains optimal bar/chain lubrication during operation with no adjustments required
- Chain oil view window enables operator to easily check oil level

**18V + 18V → 36V**  
**LXT**



DUC405Z (Tool Only)  
**36V (18Vx2) LXT**  
**16" Rear Handle Chainsaw**



Battery Capacities	Two 18V LXT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0-3,940 FPM (0 - 1 200 m/min)
Overall Length	31-1/2" (80 cm)
Net Weight	9.0 lbs (4.1 kg)

- **Strong performance, variable speed (3,940 feet per minute). Power equivalent to a 30cc gasoline Chainsaw.**
- Specialized 18Vx2 battery positioning is the Makita industry game changer within the cordless product line offering premium balance, control and cutting performance
- Makita built outer rotor Brushless motor direct drive system for high power & speed
- Captive nuts: prevent loss of nut when removing sprocket cover to replace guide bar or saw chain

**18V + 18V → 36V**  
**LXT**



DUC400Z (Tool Only)  
**36V (18Vx2) LXT**  
**16" Rear Handle Chainsaw**



Battery Capacities	Two 18V LXT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 3,940 FPM (0 - 1 200 m/min)
Overall Length	32-1/4" (81.8 cm)
Net Weight	9.3 lbs (4.2 kg)

- **Strong performance, variable speed (3,940 feet per minute). Power equivalent to a 30cc gasoline Chainsaw**
- Specialized 18Vx2 battery positioning is the Makita industry game changer within the cordless product line offering premium balance, control and cutting performance
- Makita built outer rotor Brushless motor direct drive system for high power & speed
- Tool-less chain tension adjustment for quick and easy adjustment on the jobsite



**NEW**

DUC407RTX2  
DUC407ZX2 (Tool Only)  
**18V LXT**  
**16" Rear Handle Chainsaw**

**BL MOTOR XPT**

Battery Capacities	18V LXT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 1,520 FPM (0 - 460 m/min)
Overall Length	31-1/4" (79.4 cm)
Net Weight	8.0 lbs (3.6 kg)

- **Power and performance equivalent to engine chainsaws with cordless freedom and maneuverability**
- Tool-less bar mounting and chain tension adjustment for quick and easy set up and adjustment on the jobsite
- Automatic chain oiler maintains optimal bar / chain lubrication during operation with no adjustments required
- Chain oil view window enables operator to easily check oil level
- DUH407RTX2 includes: One 18V LXT Battery (5.0Ah) & Rapid Charger



**NEW**

UC015GT101  
UC015GZ (Tool Only)  
**40V max XGT**  
**14" Rear Handle Chainsaw**

**BL MOTOR**

Battery Capacities	40V max XGT
Guide Bar Length	14" (35 cm)
Chain Pitch / Gauge	0.325" / 43G
Chain Speed	0 - 5,020 FPM (0 - 1,530 m/min)
Overall Length	17-1/2" (44.5 cm)
Net Weight	9.9 lbs (4.5 kg)

- **High speed performance, variable speed (0 - 5,020 feet per minute). Power equivalent to a 42cc gasoline Chainsaw.**
- Low noise level at only 104 dB(A) with zero emissions for operator comfort and reduced environmental impact
- Tool-less bar mounting and chain tension adjustment for quick and easy set up and adjustment on the jobsite
- Automatic chain oiler maintains optimal bar/chain lubrication during operation with no adjustments required
- UC015GT101 includes: One 40V max XGT Battery (5.0Ah) & Rapid Charger



- **Strong performance, variable speed (3,940 feet per minute). Power equivalent to a 30cc gasoline Chainsaw.**
- Specialized 18Vx2 battery positioning is the Makita industry game changer within the cordless product line offering premium balance, control and cutting performance
- Makita built outer rotor Brushless motor direct drive system for high power & speed
- Captive nuts: prevent loss of nut when removing sprocket cover to replace guide bar or saw chain

DUC355Z (Tool Only)  
**36V (18Vx2) LXT**  
**14" Rear Handle Chainsaw**

**BL MOTOR XPT**

Battery Capacities	Two 18V LXT
Guide Bar Length	14" (35 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 3,940 FPM (0 - 1,200 m/min)
Overall Length	30" (76.2 cm)
Net Weight	8.9 lbs (4.0 kg)



**NEW**

DUC307RTX2  
DUC307ZX2 (Tool Only)  
**18V LXT**  
**12" Rear Handle Chainsaw**

**BL MOTOR XPT**

Battery Capacities	18V LXT
Guide Bar Length	12" (30 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 1,520 FPM (0 - 460 m/min)
Overall Length	21-7/8" (55.6 cm)
Net Weight	8.0 lbs (3.6 kg)

- **Power and performance equivalent to engine chainsaws with cordless freedom and maneuverability**
- Tool-less bar mounting and chain tension adjustment for quick and easy set up and adjustment on the jobsite
- Automatic chain oiler maintains optimal bar / chain lubrication during operation with no adjustments required
- Chain oil view window enables operator to easily check oil level
- DUH307RTX2 includes: One 18V LXT Battery (5.0Ah) & Rapid Charger



**NEW**

UC005GM101  
UC005GZ (Tool Only)  
**40V max XGT**  
**16" Top Handle Chainsaw**

**BL MOTOR**

Battery Capacities	40V max XGT
Guide Bar Length	16" (40 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 4,880 FPM (0 - 1,490 m/min)
Overall Length	10-1/2" (26.6 cm)
Net Weight	7.5 lbs (3.4 kg)

- **Fast, variable speed (0 - 4,880 feet per minute). Power equivalent to a 32cc gasoline Chainsaw.**
- Designed with the professional arborist in mind that require a compact and powerful saw
- Variable speed control by trigger • Electric chain brake • Kickback brake • Chain oil adjustment
- Captive nuts: prevent loss of nut when removing sprocket cover to replace guide bar or saw chain
- UC005GM101 includes: One 40V max XGT Battery (4.0Ah) & Rapid Charger



**NEW**

UC004GM101  
UC004GZ (Tool Only)  
**40V max XGT**  
**14" Top Handle Chainsaw**

**BL MOTOR**

Battery Capacities	40V max XGT
Guide Bar Length	14" (35 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 4,880 FPM (0 - 1,490 m/min)
Overall Length	10-1/2" (26.6 cm)
Net Weight	7.5 lbs (3.4 kg)

- **Fast, variable speed (0 - 4,880 feet per minute). Power equivalent to a 32cc gasoline Chainsaw.**
- Designed with the professional arborist in mind that require a compact and powerful saw
- Variable speed control by trigger • Electric chain brake • Kickback brake • Chain oil adjustment
- Captive nuts: prevent loss of nut when removing sprocket cover to replace guide bar or saw chain
- UC004GM101 includes: One 40V max XGT Battery (4.0Ah) & Rapid Charger



**NEW**

UC003GM101  
UC003GZ (Tool Only)  
**40V max XGT**  
**12" Top Handle Chainsaw**

**BL MOTOR**

Battery Capacities	40V max XGT
Guide Bar Length	12" (30 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 4,880 FPM (0 - 1,490 m/min)
Overall Length	10-1/2" (26.6 cm)
Net Weight	7.5 lbs (3.4 kg)

- **Fast, variable speed (0 - 4,880 feet per minute). Power equivalent to a 32cc gasoline Chainsaw.**
- Designed with the professional arborist in mind that require a compact and powerful saw
- Variable speed control by trigger • Electric chain brake • Kickback brake • Chain oil adjustment
- Captive nuts: prevent loss of nut when removing sprocket cover to replace guide bar or saw chain
- UC003GM101 includes: One 40V max XGT Battery (4.0Ah) & Rapid Charger



**BL MOTOR XPT**

DUC306Z (Tool Only)  
**36V (18Vx2) LXT**  
**12" Top Handle Chainsaw**

Battery Capacities	Two 18V LXT
Guide Bar Length	12" (30 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 3,940 FPM (0 - 1,200 m/min)
Overall Length	21-7/8" (55.6 cm)
Net Weight	8.0 lbs (3.6 kg)

- **Strong performance, variable speed (0-3,940 feet per minute). Power equivalent to a 30cc gasoline Chainsaw.**
- Designed with the professional arborist in mind that requires an even more powerful saw
- Torque boost mode powers through thick or hard branches
- Variable speed control by trigger • Soft start for motor protection • Electric chain brake
- Captive nuts: prevent loss of nut when removing sprocket cover to replace guide bar or saw chain



DUC254Z (Tool Only)  
**18V LXT**  
**10" Top Handle Chainsaw**



Battery Capacities	18V LXT
Guide Bar Length	10" (25 cm)
Chain Pitch / Gauge	3/8" / 0.043"
Chain Speed	0 - 4,720 FPM (1,440 m/min)
Overall Length	19" (48.2 cm)
Net Weight	5.8 lbs (2.6 kg)

- **Strong performance, variable speed (0-4,720 feet per minute). Power equivalent to a 22cc gasoline Chainsaw.**
- Designed with the professional arborist in mind
- Torque boost mode powers through thick or hard branches
- Variable speed control by trigger • Soft start for motor protection • Electric chain brake
- Captive nuts: prevent loss of nut when removing sprocket cover to replace guide bar or saw chain



**NEW**

DUC101SF  
DUC101Z (Tool Only)  
**18V LXT 4" Pruning Saw**



Battery Capacities	18V LXT
Guide Bar Length	4" (10 cm)
Chain Speed	1,570 FPM (480 m/min)
Dimensions (L x W x H)	14" x 3-1/2" x 9-1/8"
	(35.7 cm x 9 cm x 23.2 cm)
Net Weight	3.5 lbs (1.6 kg)

- **Tool-less change and tension adjustment of saw chain**
- Movable guard covers the top of the guide bar and the guard opens as the branch is cut
- Adjustable chain oiling to ensure optimal lubrication for application
- Rear hand guard for additional safety
- **DUC101SF includes: One 18V LXT Battery (3.0Ah) & Standard Charger**



UA002GM101  
UA002GZ (Tool Only)  
**40V max XGT**  
**9' - 13' Telescoping**  
**10" Pole Chainsaw**



Battery Capacities	40V max XGT
Chain Pitch / Gauge	3/8" / 0.043"
Cutting Length	9-1/2" (24 cm)
Oil Tank Capacity	160 ml
Overall Length	99" (251.6 cm)
Net Weight	15.5 lbs (7.0 kg)

- **Excellent tool balance featuring lightweight cutting head for easy control and maneuverability**
- Can reach up to 13'
- Slim saw head allows accessibility in tight areas
- Integrated branch hook provides support for cutting or clearing branches
- Captive bar nut prevents loss when removing sprocket cover for replacement of saw chain or guide bar
- **UA002GM101 includes: One 40V max XGT Battery (4.0Ah) & Rapid Charger**



DUA251Z (Tool Only)  
**36V (18Vx2) LXT**  
**9' - 13' Telescoping**  
**10" Pole Chainsaw**



Battery Capacities	Two 18V LXT
Chain Pitch / Gauge	3/8" / 0.043"
Cutting Length	10" (25.5 cm)
Oil Tank Capacity	160 ml
Overall Length	88" (223.8 cm)
Net Weight	15.7 lbs (7.1 kg)

- **Excellent tool balance featuring lightweight cutting head for easy control and maneuverability**
- Telescopic pole extends your reach from 9' to 13'
- Torque boost mode delivers extra power to get through a tough cut
- Battery guard protects batteries from shocks, (e.g. fall damage, bumps, etc.) and acts as a secondary handle
- Integrated branch hook provides support for cutting or clearing branches
- Captive bar nut prevents loss when removing sprocket cover for replacement of saw chain or guide bar



UA001GM101  
UA001GZ (Tool Only)  
**40V max XGT**  
**8' / 10" Pole Chainsaw**



Battery Capacities	40V max XGT
Chain Pitch / Gauge	3/8" / 0.043"
Cutting Length	9-1/2" (24 cm)
Oil Tank Capacity	160 ml
Overall Length	88" (223.8 cm)
Net Weight	11.7 lbs (5.3 kg)

- **Excellent tool balance featuring lightweight cutting head for easy control and maneuverability**
- Slim saw head allows accessibility in tight areas
- Integrated branch hook provides support for cutting or clearing branches
- Captive bar nut prevents loss when removing sprocket cover for replacement of saw chain or guide bar
- Easily check bar oil level through translucent tank with recessed cap to protect from damage or accidental branch hang-ups
- **UA001GM101 includes: One 40V max XGT Battery (4.0Ah) & Rapid Charger**



DUA250Z (Tool Only)  
**36V (18Vx2) LXT**  
**8' / 10" Pole Chainsaw**



Battery Capacities	Two 18V LXT
Chain Pitch / Gauge	3/8" / 0.043"
Cutting Length	10" (25.5 cm)
Oil Tank Capacity	160 ml
Overall Length	88" (223.8 cm)
Net Weight	12.2 lbs (5.5 kg)

- **Excellent tool balance featuring lightweight cutting head for easy control and maneuverability**
- Torque boost mode delivers extra power to get through a tough cut
- Battery guard protects batteries from shocks, (e.g. fall damage, bumps, etc.) and acts as a secondary handle
- Integrated branch hook provides support for cutting or clearing branches
- Captive bar nut prevents loss when removing sprocket cover for replacement of saw chain or guide bar
- Easily check bar oil level through translucent tank with recessed cap to protect from damage or accidental branch hang-ups



UA002



UA001/UA002

**Chainsaw Chain, Bar and Cover Reference Chart**



Models	Bar Length	Gauge	Pitch	Chain Part No.	Chain Type	Bar Mount	Drive Link	Bar Part No.	Cover Part No.	File Size
DUC254	10" / 25 cm	0.043"	3/8"	191H00-0	90PX	A041	39	191G14-3	452093-7	4.5 mm
DUC307	12" / 30 cm	0.043"	3/8"	191H01-8	90PX	A041	46	191G15-1	413G23-5	N/A
DUC407	16" / 40 cm	0.043"	3/8"	191H03-4	90PX	A041	56	191G17-7	413G21-9	N/A
DUC306, DUC355, DUC405, DUC353, DUC400	12" / 30 cm	0.043"	3/8"	191H01-8	90PX	A041	46	191G15-1	419288-5	4.5 mm
DUC355, DUC400, DUC405	14" / 35 cm	0.043"	3/8"	191H02-6	90PX	A041	52	191G16-9	419288-5	4.5 mm
DUC353, DUC355, DUC400, DUC405	16" / 40 cm	0.043"	3/8"	191H03-4	90PX	A041	56	191G17-7	419242-9	4.5 mm
UC003	12" / 30 cm	0.043"	3/8"	191H01-8	90PX	A041	46	191G15-1	419288-5	4.5 mm
UC004	14" / 35 cm	0.043"	3/8"	191H02-6	90PX	A041	52	191G16-9	419288-5	4.5 mm
UC005	16" / 40 cm	0.043"	3/8"	191H03-4	90PX	A041	56	191G17-7	419242-9	4.5 mm
UC015	14" / 35 cm	0.043"	0.325"	191T91-3	80TXL	A041	59	191T87-4	419288-5	5/32"
UC012, UC016	16" / 40 cm	0.043"	0.325"	191T92-1	80TXL	A041	64	191T88-2	419242-9	5/32"

**Chainsaw Files & File Sets**

File Sets Includes File, Handle & Guide



953 030 010

Type	File Size	Part No.
Round	5/32"	953 030 010
	3/16"	953 030 030
	7/32"	953 009 000

File Sets Bulk 12 / Pk



953 003 040

Type	File Size	Part No.
Round	5/32"	953 003 090
	11/64"	953 003 100
	3/16"	953 003 070
	7/32"	953 003 040

6" File Handle



953 004 010

**Bar & Chain Oils**

Qty.	Particulars	Item #
4	Heavy (Summer) Bar & Chain Oil (4 x 1 Gallon)	181116-ACS2
4	Light (Winter) Bar & Chain Oil (4 x 1 Gallon)	181120-ACS2



181120-ACS2

**Chainsaw Safety Equipment**

Description



**Forestry Safety Helmet T-01703**

- Complete head, face and hearing protection for forestry use
  - Class C, E & G head protection
- **Helmet** meets CE 0086 EN397:1995 & ANSI Z87.1-2003
- **Face shield** meets CE EN166 3B, EN1731 F & ANSI Z87.1
  - **Hearing protection** meets ANSI S3.19



**Brush Guard Visor T-01638**

- Hearing and face protection for forestry use
- **Face shield** rated to CA EN 1731/S, EN 97 0194 standards
- **Hearing protection** offers 23 dB noise reduction rating (NRR)



**Forestry Face Screen FACE SHIELD**

- Replacement face screen for use with forestry safety helmets
- Meets CE EN166 3B, EN1731 F & ANSI Z87.1 standards

**Chainsaw Safety Pants**

- Certified to C/UL CAN/BNQ 1923-450-M91 Class A standards
- Zippered fly • 2 front and 2 rear pockets • Zippered ankles with button tabs
- Available in sizes: 28/30, 32/34, 36/38, 40/42 and 44/46

MSP28-30	T-01650	T-01666	T-01672	MSP44-46
Size 28/30	Size 32/34	Size 36/38	Size 40/42	Size 44/46





JR002

# HIGH POWER



DJR183

# ULTRA-COMPACT

JR002GM102 / JR002GZ (Tool Only)  
**40V max XGT Reciprocating Saw**



**BL XPT AVT**

Battery Capacities	40V max XGT
Maximum Cutting Capacities:	
Pipe	5-1/8" (13 cm)
Wood (w/11-3/4" Blade)	10" (25.5 cm)
Strokes Per Minute	0 - 3,000 SPM
Length of Stroke	1-1/4" (3.2 cm)
Overall Length	16-3/4" (42.4 cm)
Net Weight	8.6 lbs (3.9 kg)

- **High Power lightweight professional cutting**
- Orbital cutting mechanism enables operator to achieve a more aggressive cut for fast, rough cutting applications
- Tool-less shoe adjustment enables fast and easy adjustment on the jobsite
- Variable speed dial and trigger switch allows operator to adjust cutting speed to suit material or application
- JR002GM102 includes: One 40V max XGT Battery (4.0Ah) & Rapid Charger



JR001GM101  
 JR001GZ (Tool Only)  
**40V max XGT Reciprocating Saw**

**BL XPT**

Battery Capacities	40V max XGT
Maximum Cutting Capacities:	
Pipe	5-1/8" (13 cm)
Wood (w/11-3/4" Blade)	10" (25.5 cm)
Strokes Per Minute:	
High	0 - 3,000 SPM
Low	0 - 2,300 SPM
Length of Stroke	1-1/4" (3.2 cm)
Overall Length	18" (45.7 cm)
Net Weight	7.8 lbs (3.5 kg)

- **Increased jobsite durability due to lubricating mechanism and reinforced gear shaft**
- 2 speed settings provides ideal settings for wood or metal cutting applications
- Newly designed vertical crank mechanism minimizes blade deflection and reduces vibration
- JR001GM101 includes: One 40V max XGT Battery (4.0Ah) & Rapid Charger



DJR360Z (Tool Only)  
**36V (18Vx2) LXT Reciprocating Saw**

**BL XPT**

Battery Capacities	Two 18V LXT
Maximum Cutting Capacities:	
Pipe	5-1/8" (13 cm)
Wood (w/11-3/4" Blade)	10" (25.5 cm)
Strokes Per Minute:	
High	0 - 3,000 SPM
Low	0 - 2,300 SPM
Length of Stroke	1-1/4" (3.2 cm)
Overall Length	17-3/4" (44.9 cm)
Net Weight	6.2 lbs (2.8 kg)

- **Increased cutting speed and stroke length offers maximum cutting efficiency**
- 2 speed settings provides ideal settings for wood or metal cutting applications
- Newly designed vertical crank mechanism minimizes blade deflection and reduces vibration
- "Tool-less" shoe adjustment enables fast and easy adjustment on the jobsite



DJR187RTX1  
 DJR187Z (Tool Only)  
**18V LXT Reciprocating Saw**

**BL XPT**

Battery Capacities	18V LXT
Maximum Cutting Capacities:	
Pipe	5-1/8" (13 cm)
Wood (w/11-3/4" Blade)	10" (25.5 cm)
Strokes Per Minute:	
High	0 - 3,000 SPM
Low	0 - 2,300 SPM
Length of Stroke	1-1/4" (3.2 cm)
Overall Length	17-1/4" (43.9 cm)
Net Weight	6.9 lbs (3.1 kg)

- **Increased cutting speed and stroke length offers maximum cutting efficiency**
- 2 speed settings provides ideal settings for wood or metal cutting applications
- Newly designed vertical crank mechanism minimizes blade deflection and reduces vibration
- "Tool-less" shoe adjustment enables fast and easy adjustment on the jobsite
- DJR187RTX1 includes: One 18V LXT Battery (5.0Ah) & Rapid Charger



DJR186RTX1  
 DJR186Z (Tool Only)  
**18V LXT Reciprocating Saw**

**XPT**

Battery Capacities	18V LXT
Maximum Cutting Capacities:	
Pipe	5-1/8" (13 cm)
Wood (w/11-3/4" Blade)	10" (25.5 cm)
Strokes Per Minute	0 - 2,800 SPM
Length of Stroke	1-1/4" (3.2 cm)
Overall Length	19-1/8" (48.6 cm)
Net Weight	7.1 lbs (3.2 kg)

- **Heavy duty design and performance**
- Increased cutting speed and stroke length offers maximum cutting efficiency
- Newly designed vertical crank mechanism minimizes blade deflection and reduces vibration
- Fixed shoe provides maximum stability during heavy duty cutting applications
- DJR186RTX1 includes: One 18V LXT Battery (5.0Ah) & Rapid Charger



DJR189RT  
DJR189Z (Tool Only)  
**18V LXT Reciprocating Saw**



Battery Capacities	18V LXT
Maximum Cutting Capacities:	
Pipe	5-1/8" (13 cm)
Wood (w/11-3/4" Blade)	10" (25.5 cm)
Strokes Per Minute	0 - 3,100 SPM
Length of Stroke	7/8" (2.2 cm)
Overall Length	16-1/8" (41 cm)
Net Weight	4.0 lbs (1.8 kg)

**NEW**

- High power and lightweight design with low vibration for easy use in tight spaces
- Integrated counterweight creates low vibration for reduced operator strain and fatigue
- Loop handle design protects operators hand from contact with materials
- Tool-less blade change feature enables fast and easy blade changes on the jobsite
- DJR189RT includes: One 18V LXT Battery (5.0Ah) & Rapid Charger



DJR183Z (Tool Only)  
**18V LXT Reciprocating Pruning Saw**

Battery Capacities	18V LXT
Maximum Cutting Capacities:	
Pipe	2" (5 cm)
Wood (w/12" Blade)	2" (5 cm)
Strokes Per Minute	0 - 3,000 SPM
Length of Stroke	1/2" (1.3 cm)
Overall Length	15-5/8" (39.8 cm)
Net Weight	2.7 lbs (1.2 kg)

- Ultra-compact and lightweight design for maximum versatility and maneuverability
- Multi-position switch (tool handle & tool body) with lock-off levers for easier operation, maximum versatility and operator safety
- Battery protection system provides over-discharge, temperature and circuit protection for enhanced performance, battery cycle life and overall battery life



DJR188ZB (Tool Only)  
**18V LXT Sub-Compact Reciprocating Saw**



Battery Capacities	18V LXT
Maximum Cutting Capacities:	
Pipe	5-1/8" (13 cm)
Wood (w/11-3/4" Blade)	10" (25.5 cm)
Strokes Per Minute	0 - 3,000 SPM
Length of Stroke	13/16" (2 cm)
Overall Length	12-1/2" (31.6 cm)
Net Weight	5.1 lbs (2.3 kg)

- SUB-COMPACT Size - PROFESSIONAL Power
- Sub-compact size and weight ideal for fast and fatigue free cutting
- Tool-less blade change feature enables fast and easy blade changes on the jobsite
- Shorter overall length enables easy access between 16" on-centre studs
- Electric brake stops blade immediately for maximum operator safety
- Constant speed control maintains constant speed under heavy load



JR103DZ (Tool Only)  
**12V max CXT Li-Ion Reciprocating Saw**



Battery Capacities	12V max CXT Li-Ion
Maximum Cutting Capacities:	
Pipe	2" (5 cm)
Wood	2" (5 cm)
Strokes Per Minute	0 - 3,000 SPM
Length of Stroke	1/2" (1.3 cm)
Overall Length	14-3/4" (37.6 cm)
Net Weight	2.5 lbs (1.1 kg)

- Compact eXtreme Technology (CXT)
- Multi-position switch (tool handle and tool body) with lock-off levers for easier operation, maximum versatility and operator safety
- One-handed, fast tool-less blade changes
- Battery protection system provides over-discharge, temperature and circuit protection for enhanced performance, battery cycle life and overall battery life

**Reciprocating Saw Blades**



Ideal for **Green Wood**  
723053-A-5



Ideal for **Concrete, Concrete Block & Brick**  
B-12809



Ideal for **Bone, Horn, Frozen Foods, Ice & Pruning**  
B-23248

Length	TPI	Width	Thickness	Material	Blade Type	Recommended Use	Part No.	Pk
<b>Masonry</b>								
8"	Tungsten Carbide Grit	3/4"	.040"	-	Straight Back	Brick, Tile, Marble, Stone, Chalkboard, Cast Iron, Melamine, Veneer & Fibreglass	723077-A-2	2 / Pk
9-1/2"	2 Carbide Teeth	1"	.0625"	-	Straight Back	Aerated Concrete, Concrete Block & Brick, Low Aggregate Concrete & Masonry, Abrasive Materials	B-12809	1 / Pk
12"	2 Carbide Teeth	2"	.0625"	-	Straight Back	Aerated Concrete, Concrete Block & Brick, Low Aggregate Concrete & Masonry, Abrasive Materials	B-10394	1 / Pk
<b>Wood Cutting</b>								
8"	Progressive	3/4"	.050"	High Carbon Steel	Taper Back	Fast, Clean Cutting in Wood from 1/4" - 4"	723078-A-5	5 / Pk
9"	3	3/4"	.050"	High Carbon Steel	Taper Back	Very Fast, Aggressive Cutting in Green Wood from 5/8" - 6"	723053-A-5	5 / Pk
9"	6	3/4"	.050"	High Carbon Steel	Taper Back	Very Fast, Aggressive Cutting in Green Wood from 5/8" - 6"	723052-A-5	5 / Pk
<b>Specialty</b>								
6"	6	3/4"	.050"	Stainless Steel	Straight Back	Bone, Horn, Frozen Foods, Ice, Pruning	B-52043	1 / Pk
9"	6	3/4"	.050"	Stainless Steel	Straight Back	Bone, Horn, Frozen Foods, Ice, Pruning	B-30564	1 / Pk
9"	10	3/4"	.050"	Stainless Steel	Straight Back	Meat, Frozen Foods, Ice	B-30570	1 / Pk
12"	6	3/4"	.050"	Stainless Steel	Straight Back	Bone, Horn, Frozen Foods, Ice, Pruning	B-23248	1 / Pk
12"	10	3/4"	.050"	Stainless Steel	Straight Back	Meat, Frozen Foods, Ice	B-23254	1 / Pk
7"	8.5	3/4"	.024"	High Carbon Steel	Straight Back	Green Wood, Pruning	B-56580	1 / Pk
7"	15	3/4"	.024"	High Carbon Steel	Straight Back	Green Wood, Pruning, Bamboo, PVC	B-56596	1 / Pk
9"	8.5	3/4"	.035"	Bi-Metal	Straight Back	Green Wood, Pruning	B-57386	1 / Pk
9"	15	3/4"	.035"	Bi-Metal	Straight Back	Green Wood, Pruning, Bamboo, PVC	B-57392	1 / Pk
10"	8.5	3/4"	.039"	High Carbon Steel	Straight Back	Green Wood, Pruning	B-62016	1 / Pk

40V max XGT Batteries

# GOING BEYOND LIMITS



**2.5** Ah BATTERY



**4.0** Ah BATTERY



**5.0** Ah BATTERY



**8.0** Ah BATTERY

**HIGHER OUTPUT POWER**  
UP TO 2X LONGER RUN TIME

**COMPACT SIZE**

**LONGER RUN TIME**

**BL4025**  
40V max XGT Battery (2.5Ah) **28 MIN** CHARGE TIME

**BL4040**  
40V max XGT Battery (4.0Ah) **45 MIN** CHARGE TIME

**BL4050F**  
40V max XGT Battery (5.0Ah) **50 MIN** CHARGE TIME

**BL4080F**  
40V max XGT Battery (8.0Ah) **76 MIN** CHARGE TIME

\* with Makita 40V max XGT Rapid Chargers

40V max XGT Chargers



**DC40RA**  
40V max XGT Rapid Charger

- Charges a 40V max XGT 2.5Ah battery in 28 minutes, and 4.0Ah battery in 45 minutes
- Built-in chip communicates during the charging process to control current, voltage, and temperature



**DC40RB**  
40V max XGT Dual Port Rapid Charger

- Charges a 40V max XGT 2.5Ah battery in 28 minutes, and 4.0Ah battery in 45 minutes
- Three fan design circulates air through the batteries and circuit board for faster charging



**ADP10**  
18V LXT Adapter for XGT Chargers

- Adapts 40V max XGT chargers to charge 18V LXT batteries (batteries not included)
- Charges a 18V LXT 5.0Ah battery in 40 minutes, and 6.0Ah battery in 50 minutes

Backpack Power Supply



**CONNECTX™**  
**XGT** 40V | 80V max **120Wh** → **120V** → **36V**

**PDC1200A02**  
ConnectX™ 1,200Wh Portable Backpack Power Supply

- Ideal for all day work; expected run times with PDC1200A02 may vary by product, application, and workday amount
- Powers ConnectX™, 40V max XGT and 36V (18Vx2) LXT systems for ultimate compatibility (40V max adapter 191N62-4 sold separately)



**191N62-4**  
40V max XGT Adapter (PDC1200A02, PDC01)

BACKPACK POWER SUPPLIES & ACCESSORIES

**Backpack Power Supply**



**CONNECTX**  
**XGT** 40V | 80V max  $\xrightarrow{18V \rightarrow 18V}$   $\xrightarrow{18V}$  **36V**

**PDC1200A02**  
ConnectX™ 1,200Wh Portable Backpack Power Supply

- Ideal for all day work; expected run times with PDC1200A02 may vary by product, application, and workday amount
- Powers ConnectX™, 40V max XGT and 36V (18Vx2) LXT systems for ultimate compatibility (40V max adapter 191N62-4 sold separately)



**CONNECTX**  
**XGT** 40V | 80V max  $\xrightarrow{18V \rightarrow 18V}$   $\xrightarrow{18V}$  **36V** **18V**

**PDC01X2**  
**PDC01 (TOOL ONLY)**  
Portable Power Pack

- Provides up to 4X the run time when used with Makita 18V LXT products
- Provides up to 2X the run time when used with Makita 36V (18Vx2) LXT products

**Backpack Power Supply Adapters**



**191J51-5**  
36V (18Vx2) LXT Adapter  
(PDC1200A02, PDC01)



**191J50-7**  
18V LXT Adapter  
(PDC01 Only)



- Small MAKPAC Interlocking Case (197210-9) with Optional Inner Tray (839742-7)**
- For convenient storage and transportation of batteries
  - 839742-7 Inner tray fits Small MAKPAC Interlocking Case 197210-9
  - Holds up to 8 batteries
  - Interlocking latches secure lid shut and link multiple cases together

**18V LXT Batteries**



**55MIN\***  
CHARGE TIME

**45MIN\***  
CHARGE TIME

**36MIN\***  
CHARGE TIME

**22MIN\***  
CHARGE TIME

**15MIN\***  
CHARGE TIME

**HIGHEST OUTPUT + FAST CHARGE TIME** **HIGH OUTPUT + FASTER CHARGE TIME**

**6.0Ah BATTERY** **BL1860B**  
18V LXT  
Battery (6.0Ah)

**5.0Ah BATTERY** **BL1850B**  
18V LXT  
Battery (5.0Ah)

**4.0Ah BATTERY** **BL1840B**  
18V LXT  
Battery (4.0Ah)

**3.0Ah BATTERY** **BL1830B**  
18V LXT  
Battery (3.0Ah)

**1.5Ah BATTERY** **BL1815N**  
18V LXT  
Battery (1.5Ah)

\* with Makita 18V LXT Rapid Chargers

LXT BATTERIES & CHARGERS

**LXT Chargers**



- DC18RC**  
**18V LXT Rapid Charger**
- Charges 18V LXT 1.5Ah battery in 15 minutes, 3.0Ah in 22 minutes, 4.0Ah in 36 minutes and 5.0Ah in 45 minutes
  - Communicates with the battery's built-in chip during the charging process to optimize battery life



- DC18SF**  
**18V LXT 4-Port Multi-Charger**
- Charges two (2) 18V LXT 6.0Ah batteries in 130 minutes and four (4) 18V LXT 6.0Ah batteries in 260 minutes
  - Charges two (2) 18V LXT 3.0Ah batteries in 60 minutes and four (4) 18V LXT 3.0Ah batteries in 120 minutes



- DC18RD**  
**18V LXT Dual Rapid Charger**
- Charges 2 batteries simultaneously
  - Charges two (2) 18V LXT 6.0Ah batteries in only 55 minutes



- DC18SE**  
**18V LXT Automotive Charger**
- Compatible with 12-volt DC outlets found in most autos and trucks
  - Charges Makita 18V Lithium-Ion slide-style batteries

## Makita Canada **Order Desk & Distribution Centres**

### **Western Canada**

**Phone: 604-272-3104**

**Toll Free Phone: 1 800-663-0909**

**Toll Free Fax: 1 800-667-7078**

Email: [orderdeskmcv@makita.ca](mailto:orderdeskmcv@makita.ca)

### **Central, Québec & Eastern Canada**

**BILINGUAL SERVICE**

**Phone: 905-571-2200**

**Toll Free Phone: 1 800-263-3734**

**Toll Free Fax: 1 800-565-0906**

Email (English): [orderdeskmtc@makita.ca](mailto:orderdeskmtc@makita.ca)

Email (Français): [orderdeskmcq@makita.ca](mailto:orderdeskmcq@makita.ca)

## **FACTORY SERVICE CENTRES** 12 LOCATIONS FROM COAST TO COAST

#### **RICHMOND / VANCOUVER**

11771 Hammersmith Way  
Richmond, BC. V7A 5H6  
**Phone: 604-272-3104**  
**Toll Free: 1 800-663-0909**  
**Fax: 604-272-5416**

#### **BURNABY / VANCOUVER**

2288 Holdom Avenue  
Burnaby, BC. V5B 4Y5  
**Phone: 604-291-1511**  
**Toll Free: 1 877-295-1511**  
**Fax: 604-291-1599**

#### **CALGARY**

#8 - 6325 11th Street SE  
Calgary, AB. T2H 2L6  
**Phone: 403-243-3995**  
**Toll Free: 1 800-267-0445**

#### **EDMONTON**

11614 - 149 Street NW  
Edmonton, AB. T5M 3R3  
**Phone: 780-455-6644**  
**Toll Free: 1 888-455-6644**  
**Fax: 780-451-4877**

#### **SASKATOON**

206A - 2750 Faithful Avenue  
Saskatoon, SK. S7K 6M6  
**Phone: 306-931-0111**  
**Toll Free: 1 888-931-0111**  
**Fax: 306-931-4574**

#### **WINNIPEG**

1670 St. James Street  
Winnipeg, MB. R3H 0L3  
**Phone: 204-694-0402**  
**Toll Free: 1 800-550-5073**  
**Fax: 204-694-5782**

#### **LONDON**

317 Adelaide Street S. Unit 117  
London, ON. N5Z 3L3  
**Phone: 519-686-3115**  
**Toll Free: 1 800-571-0899**  
**Fax: 519-686-4347**

#### **MISSISSAUGA / TORONTO**

6350 Tomken Road Unit 8  
Mississauga, ON. L5T 1Y3  
**Phone: 905-670-7255**  
**Toll Free: 1 888-221-9811**  
**Fax: 905-670-0120**

#### **WHITBY / TORONTO**

1950 Forbes Street  
Whitby, ON. L1N 7B7  
**Phone: 905-571-2200**  
**Toll Free: 1 800-263-3734**  
**Fax: 1 800-867-1683**

**Makita Canada  
Head Office  
& Distribution  
Centre** 



#### **MONTREAL / ST. LEONARD**

6389 Boulevard Couture  
St. Leonard, QC. H1P 3J5  
**Phone: 514-323-1223**  
**Toll Free: 1 800 361-7049**  
**Fax: 1 800-561-5953**

#### **QUÉBEC CITY / LES SAULES**

500 Avenue St. Jean Baptiste  
Suite 100, Québec, QC.  
G2E 6H5  
**Phone: 418-871-5720**  
**Toll Free: 1 800-663-5757**  
**Fax: 418-871-6684**

#### **DARTMOUTH / HALIFAX**

204 Brownlow Avenue, Unit 145  
Dartmouth, NS. B3B 1T5  
**Phone: 902-468-7064**  
**Toll Free: 1 888-625-4821**  
**Fax: 902-468-3551**